



Technician License Course



Technician License Course

Chapter 9

Lesson Plan Module – 18

Safety & Amateur Radio

Electrical Injuries

- Shocks and burns.
- Low voltages can cause enough current to create problems.
- Equipment today uses lower voltage than tube equipment but it can still cause burns.

Effects of Electric Current in the Human Body

<i>Current</i>	<i>Reaction</i>
Below 1 milliampere	Generally not perceptible
1 milliampere	Faint tingle
5 milliamperes	Slight shock felt; not painful but disturbing. Average individual can let go. Strong involuntary reactions can lead to other injuries.
6-25 milliamperes (women) 9-30 milliamperes (men)	Painful shock, loss of muscular control*; the freezing current or "can't let-go" range.
50-150 milliamperes	Extreme pain, respiratory arrest, severe muscular contractions. Death is possible.
1000-4300 milliamperes	Rhythmic pumping action of the heart ceases. Muscular contraction and nerve damage occur; death likely.
10,000 milliamperes	Cardiac arrest, severe burns; death probable

* If the extensor muscles are excited by the shock, the person may be thrown away from the power source.

Source: W.B. Kouwenhoven, "Human Safety and Electric Shock," Electrical Safety Practices, Monograph, 112, Instrument Society of America, p 93. November 1968.



Electrical Safety

- Avoiding contact is the most effective way of practicing electrical safety
- Unplug equipment before working on it
- Keep one hand in your pocket
- Make sure equipment is grounded
- Use power from GFCI-protected circuits



Mitigating Electrical Hazards

- If working on live equipment is required:
 - Remove jewelry
 - Avoid unintentional touching of circuitry
 - Never bypass safety interlocks
 - Discharge high-voltage points and components to ground
 - Capacitors can store charge after power is off
 - Storage batteries are dangerous when shorted



Responding to Electrical Injury

- REMOVE POWER!
 - Have ON/OFF switches and circuit breakers clearly marked.
 - Install an emergency master power switch and make sure your family knows how to use it.
- Call for help.
- Learn CPR and first aid.



Electrical Grounding and Circuit Protection

- Make sure your station wiring meets code
- Most ham equipment does not require special wiring or circuits
 - Use 3-wire power cords
 - Use circuit breakers, circuit breaker outlets, or Ground Fault Circuit Interrupter (GFCI) circuit breakers or outlets
 - Use proper fuse or circuit breaker size
 - Don't overload single outlets or circuits

Grounding & Bonding at RF

- RF burns from “hot spots” at high RF voltage
 - Do not cause serious injury at ham power level
 - Prevent by bonding (connecting) equipment together with heavy wire or strap – braided strap not recommended at RF
 - Prevent by keeping people away from antennas and radial or counterpoise wires
- Ground equipment for AC safety



Lightning Protection

- Ground antennas and towers to local code
 - Use 8-ft ground rod for each tower leg
 - Bond rods to tower leg and the other rods
- Ground connections should be as short as possible
- Use lightning arrestors on a single ground plate where cables enter the house
- Unplug and disconnect equipment (including telephones and computers) and feed lines if lightning is expected



RF Exposure


- Electromagnetic radiation (EMR) is not the same as radioactivity – much lower energy
- RF energy heats body tissues
 - Heating depends on the RF intensity and frequency.
 - If precautions are taken, RF exposure is minimal and not dangerous.



RF Intensity

- Power Density
 - Watts per square centimeter (w/cm^2)
- Higher power density means higher RF exposure
- RF absorption varies with frequency because of body part size
- Safe exposure levels have been established by the FCC

Maximum Permissible Exposure (MPE)

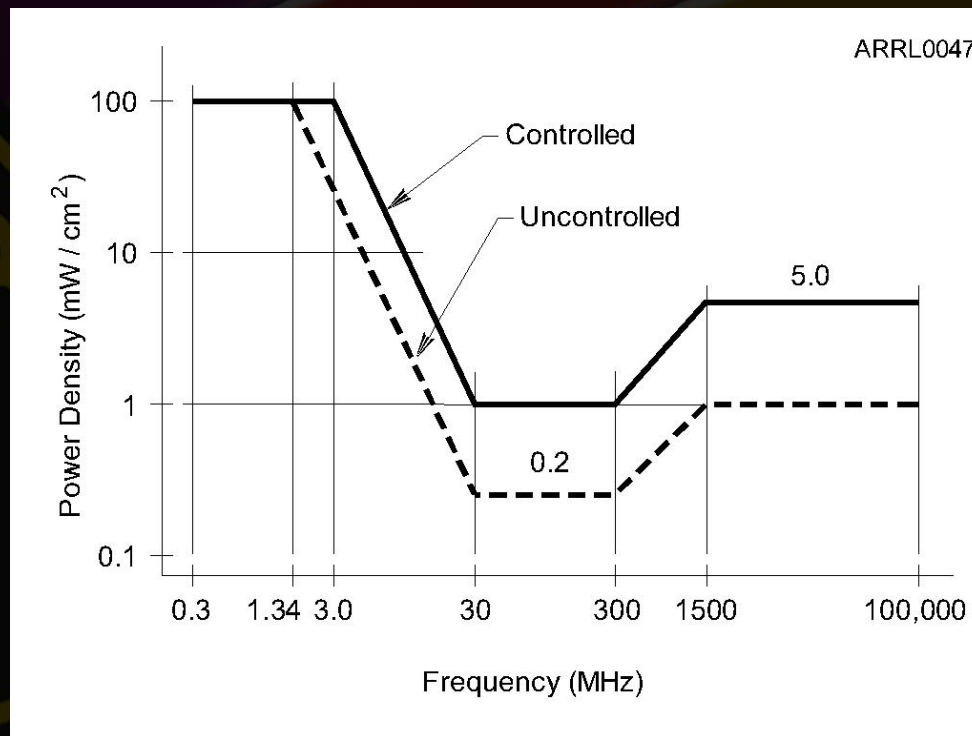



RF Environment

- Controlled Environment.
 - You know where people are standing in relation to your antenna and you can do something about it.
 - Higher power density is allowed because you can make adjustments if needed.



RF Environment

- Uncontrolled Environment.
 - You have no control of people near your antenna.
 - Lower power density is allowed because you cannot control or adjust the exposure of people.

Duty Cycle and Duty Factor

- Duty cycle is the percentage of time that a transmitter is on during the evaluation period, from 0 to 100%
- Duty cycle = $100 \times (\text{time on} / \text{total time})$
- Duty factor is the same as duty cycle, but given as a number from 0 to 1.0
- Higher duty cycle or factor means higher average power density and exposure

Mode Duty Cycle

- Accounts for the different characteristics of the transmitted signal's waveform

Operating Duty Factor of Modes Common	
<i>Mode</i>	<i>Duty Cycle</i>
Conversational SSB	20%
Conversational SSB	40%
SSB AFSK	100%
SSB SSTV	100%
Voice AM, 50% modulation	50%
Voice AM, 100% modulation	25%
Voice AM, no modulation	100%
Voice FM	100%
Digital FM	100%
ATV, video portion, image	60%
ATV, video portion, black screen	80%
Conversational CW	40%
Carrier	100%



RF Exposure Evaluation

- All fixed stations must perform an exposure evaluation.
- Use online calculator (easiest)
- Model exposure with software (difficult)
- Measure RF power density (most difficult)



RF Exposure Evaluation

- An RF Exposure evaluation is required when a station is built or altered. The previous exclusion for some power levels and frequencies presented in your manuals has been rescinded by the FCC!
- Re-evaluate exposure when station equipment or operating frequencies change.



Reducing RF Exposure

- Relocate or reorient antennas
- Raise the antenna
- Reduce antenna gain
- Reduce RF power output
- Change to a lower duty cycle mode



Mobile Safety

- Mobile Installations
 - Secure all equipment
 - Place equipment where you can operate it safely while driving
 - Know local rules for use of communications equipment while driving
 - May need hands-free microphone



Power Line Safety

- Keep antennas well away from power lines
- Check for power lines before installing antennas in trees
- Provide a minimum of 10 feet of clearance if antenna falls
- Never attach antennas or guy lines to utility poles or structures



Tower Work


- Basic tower safety
 - Proper clothing, hard hat and eye protection
 - Use a proper climbing harness, not a lineman's belt or rock-climbing gear
 - Don't climb a crank-up tower supported only by its lift cable – block and secure it first
 - Use a gin pole to lift heavy items
 - Don't work alone – use a ground crew



Practice Questions

What is a safety hazard of a 12 voltage storage battery?



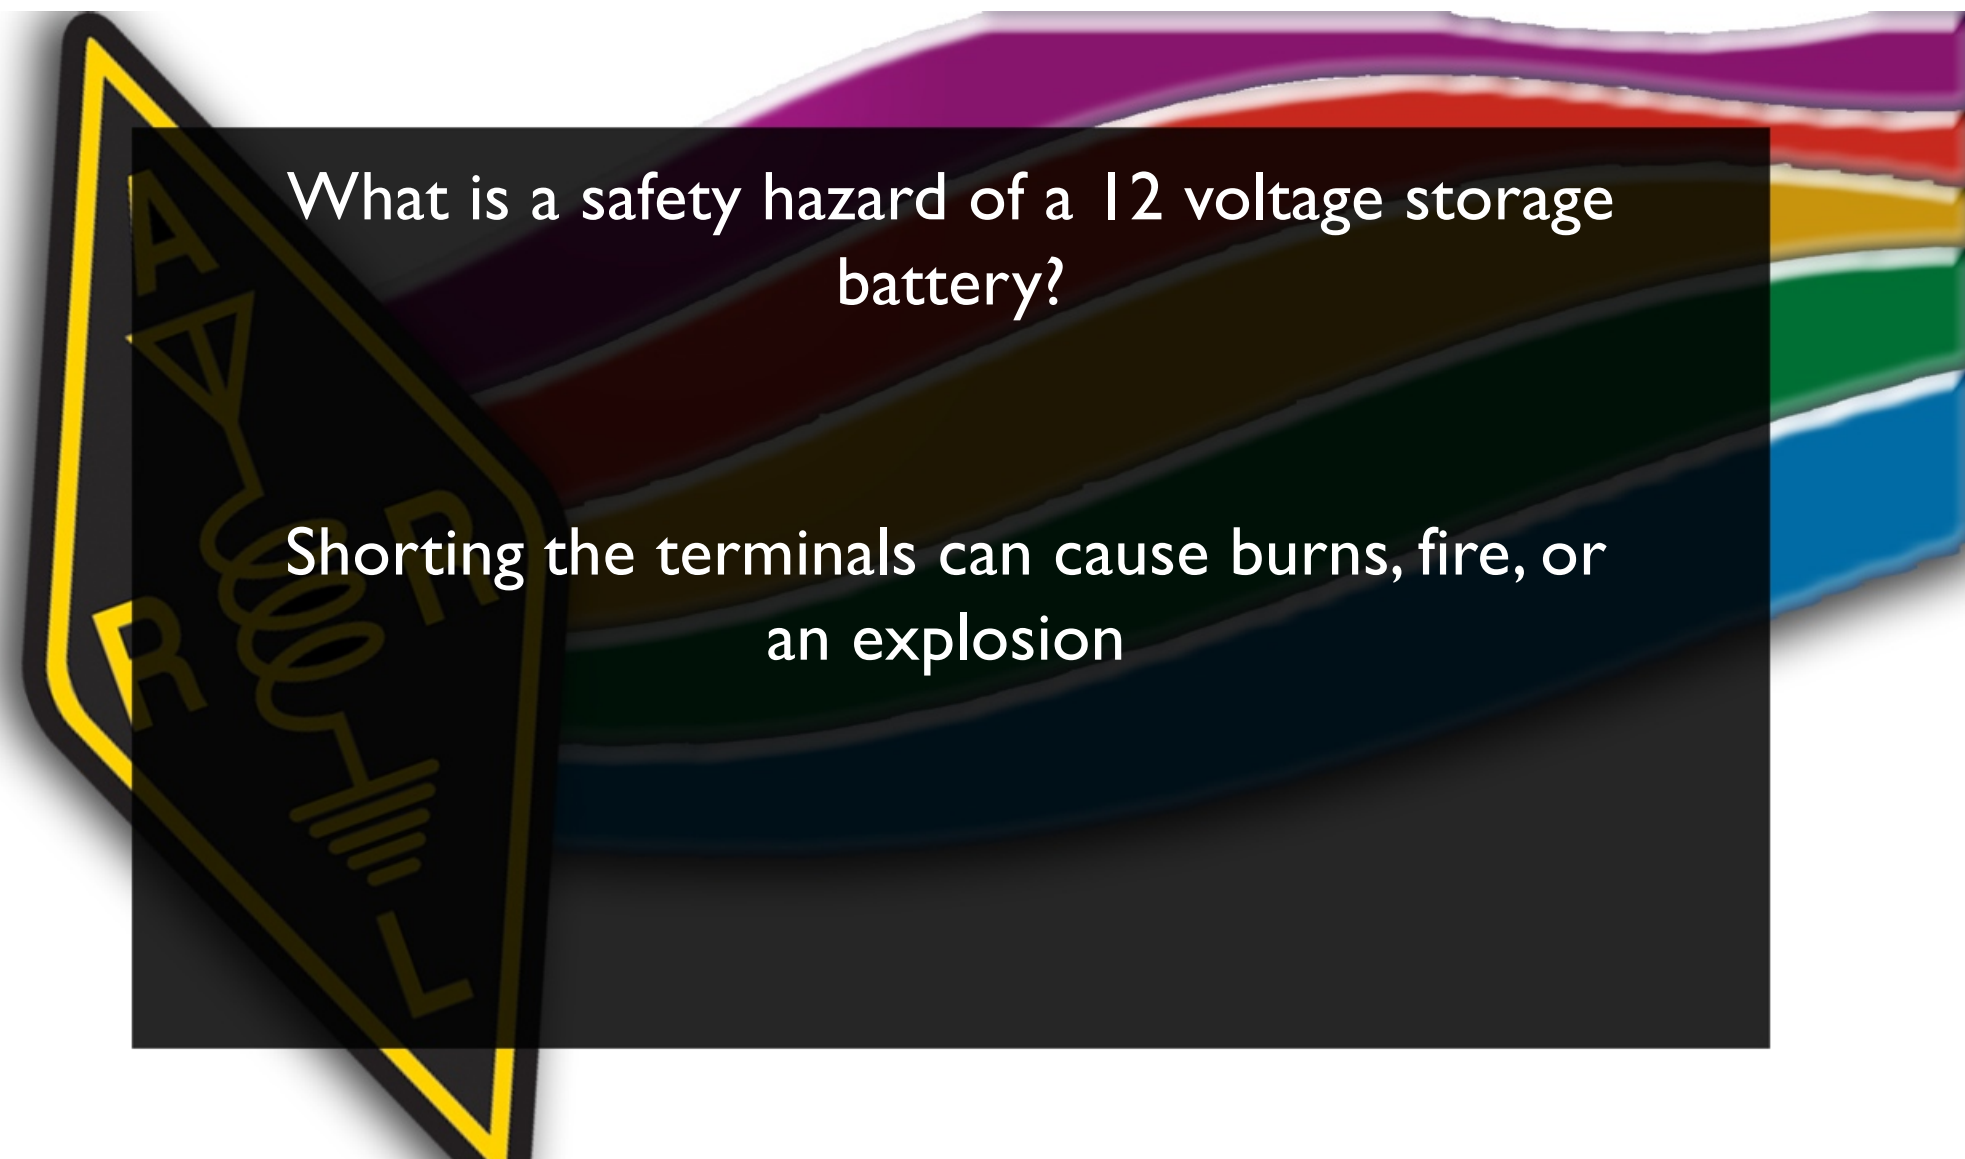

What is a safety hazard of a 12 voltage storage battery?

Shorting the terminals can cause burns, fire, or an explosion

The background of the slide is a vibrant, multi-colored wavy pattern. The colors transition from purple at the top, through red, orange, yellow, green, and blue, to dark blue at the bottom. A dark grey rectangular box is superimposed over the center of the image, containing the text. On the left side of this box, there is a yellow-outlined triangular warning sign with a black background. The sign contains a circuit diagram with a battery at the bottom, a resistor labeled 'R' on the right, a resistor labeled 'R' on the left, and a resistor labeled 'R' in the middle. The letters 'A' and 'V' are also visible on the left side of the sign.

How does current flowing through the body
cause a health hazard?



How does current flowing through the body
cause a health hazard?

By heating tissue

It disrupts the electrical functions of cells

It causes involuntary muscle contractions


A bundle of multi-colored wires (purple, red, yellow, green, blue) is shown against a white background. A dark, semi-transparent rectangular overlay is placed over the wires. Inside this overlay, the text "What is connected to the green wire in a three-wire electrical AC plug?" is written in white. To the left of the text, there is a yellow-outlined triangular warning sign with a black background. The sign contains a circuit diagram with a resistor (R), an inductor (L), and a capacitor (C) connected in series. The letters "A" and "R" are also visible on the sign.

What is connected to the green wire in a three-wire electrical AC plug?

A bundle of multi-colored wires (purple, red, yellow, green, blue) is shown against a white background. A dark, semi-transparent rectangular overlay is placed over the wires. Inside this overlay, the text "What is connected to the green wire in a three-wire electrical AC plug?" is written in white. Below the text, the words "Safety ground" are also written in white. On the left side of the overlay, there is a yellow-outlined diagram of a three-wire electrical plug. The diagram shows a resistor labeled 'R' connected to a coil labeled 'A', which is connected to another resistor labeled 'R'. This second resistor is connected to a ground symbol, which is represented by three horizontal lines of decreasing length. The entire diagram is enclosed in a yellow border.


What is connected to the green wire in a three-wire electrical AC plug?

Safety ground



What is a good way to guard against electrical shock at your station?



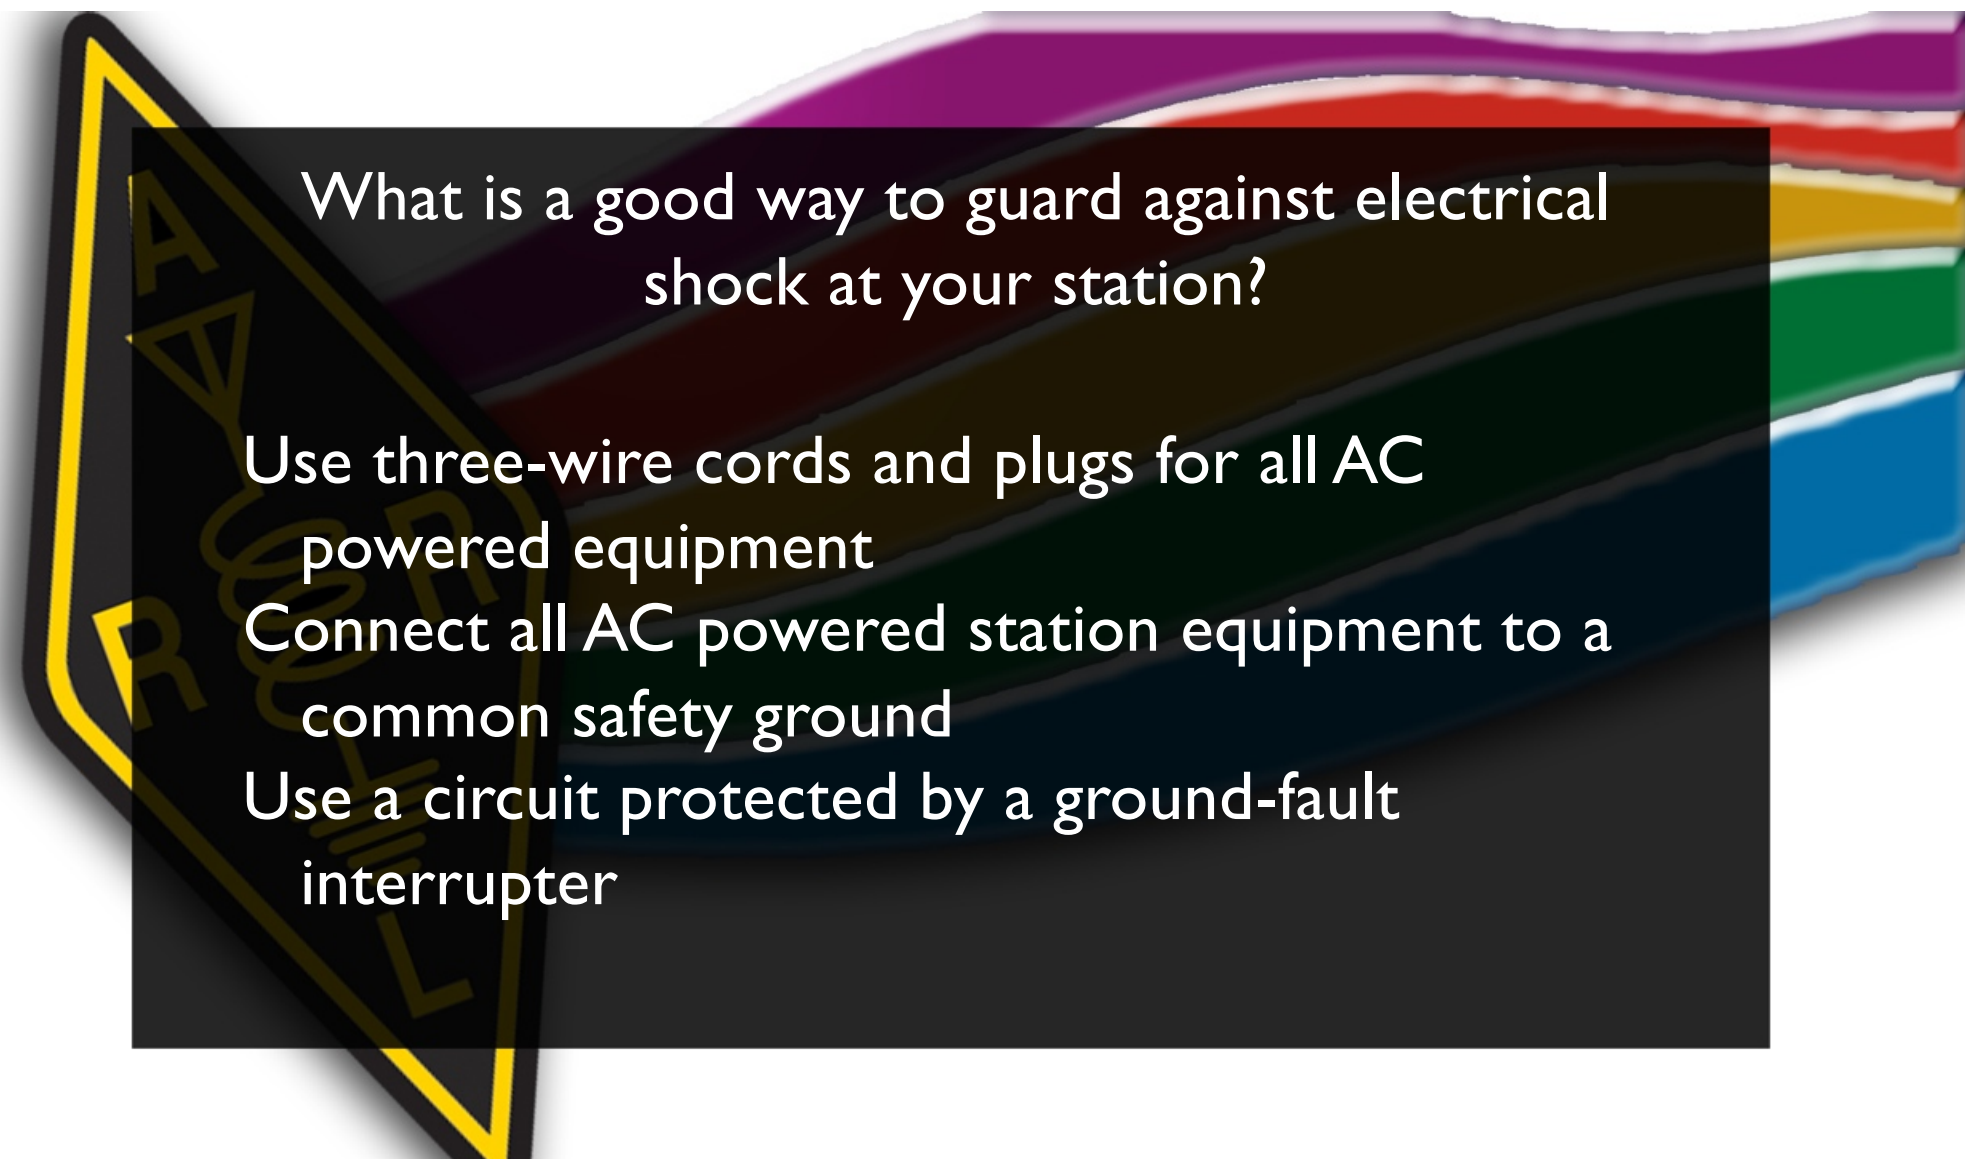


What is a good way to guard against electrical shock at your station?


Use three-wire cords and plugs for all AC powered equipment

Connect all AC powered station equipment to a common safety ground

Use a circuit protected by a ground-fault interrupter


A bundle of multi-colored coaxial cables is shown, with a dark grey rectangular overlay in the center. On the left side of the overlay, there is a yellow-outlined circuit diagram. The diagram includes a triangle with the letter 'A' inside, a resistor symbol labeled 'R', an inductor symbol labeled 'L', and a capacitor symbol labeled 'C'. The text "What precaution should be taken when installing devices for lightning protection in a coaxial cable feed line?" is written in white on the dark grey background.

What precaution should be taken when installing devices for lightning protection in a coaxial cable feed line?

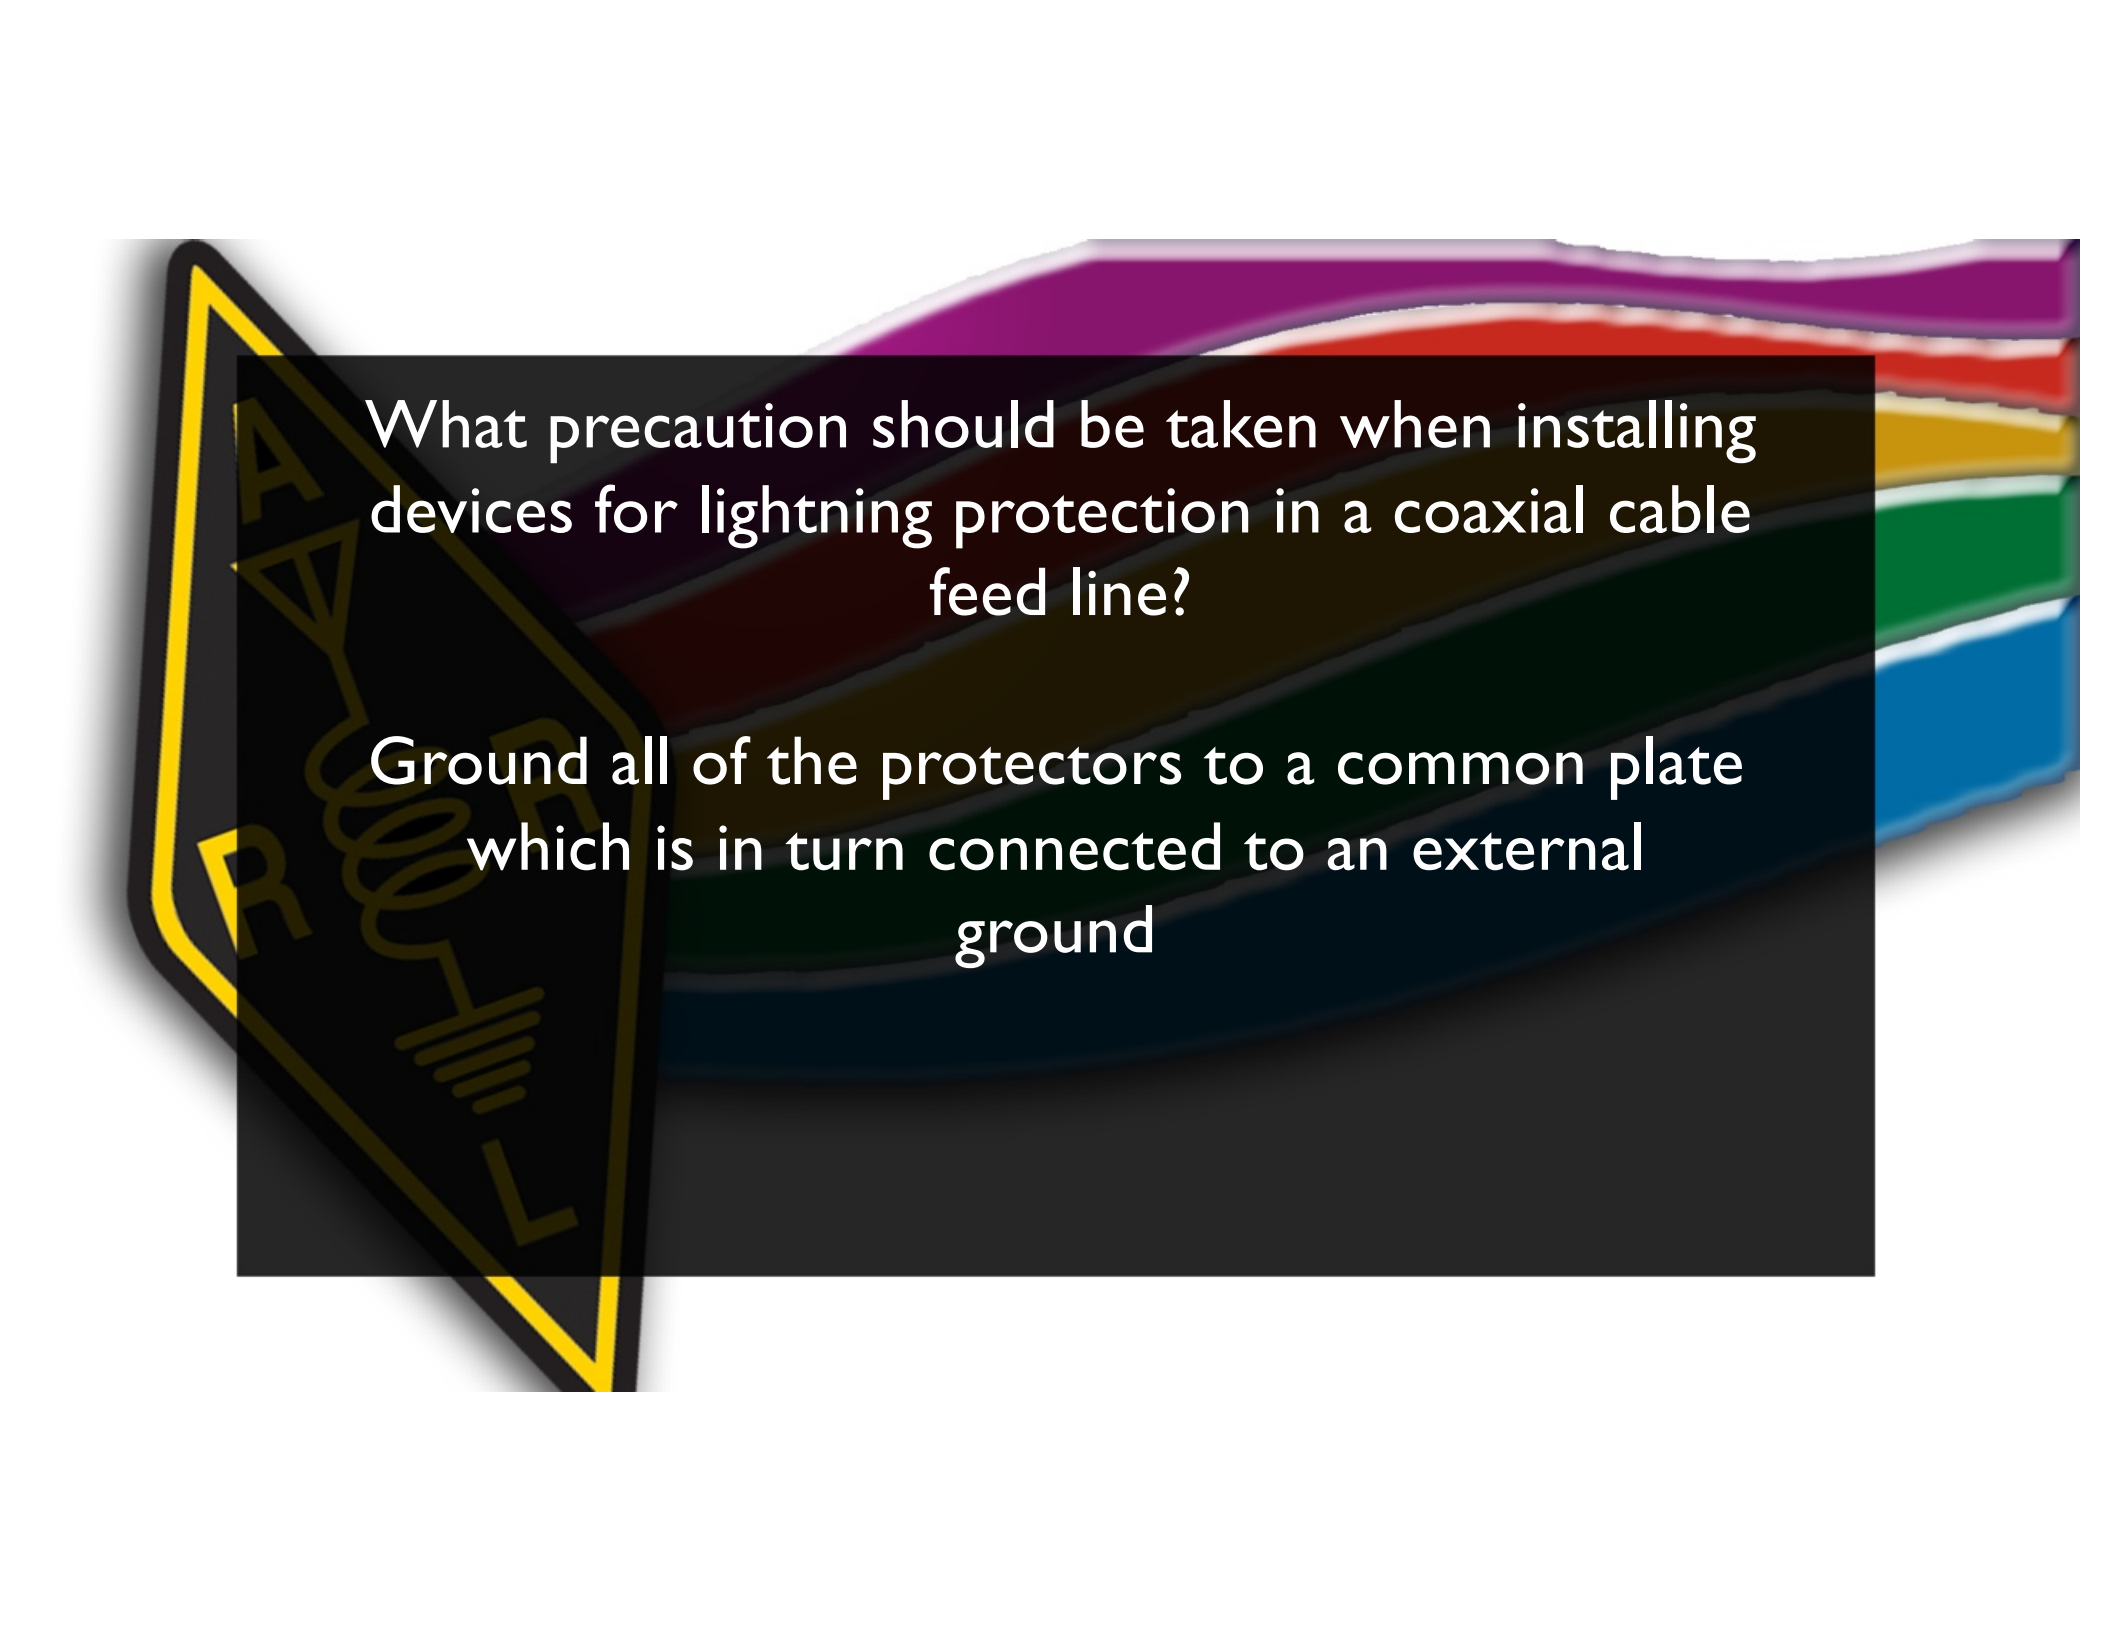
A bundle of multi-colored coaxial cables is shown against a white background. The cables are cut at the end, revealing their internal structure. A large, black, diamond-shaped warning sign with a yellow border is overlaid on the left side of the cables. The sign contains the word 'DANGER' in a stylized font and a lightning bolt symbol. The text of the question is centered over the cables.

What precaution should be taken when installing devices for lightning protection in a coaxial cable feed line?

Ground all of the protectors to a common plate which is in turn connected to an external ground




What safety equipment should always be included in home-built equipment that is powered from 120V AC power circuits?

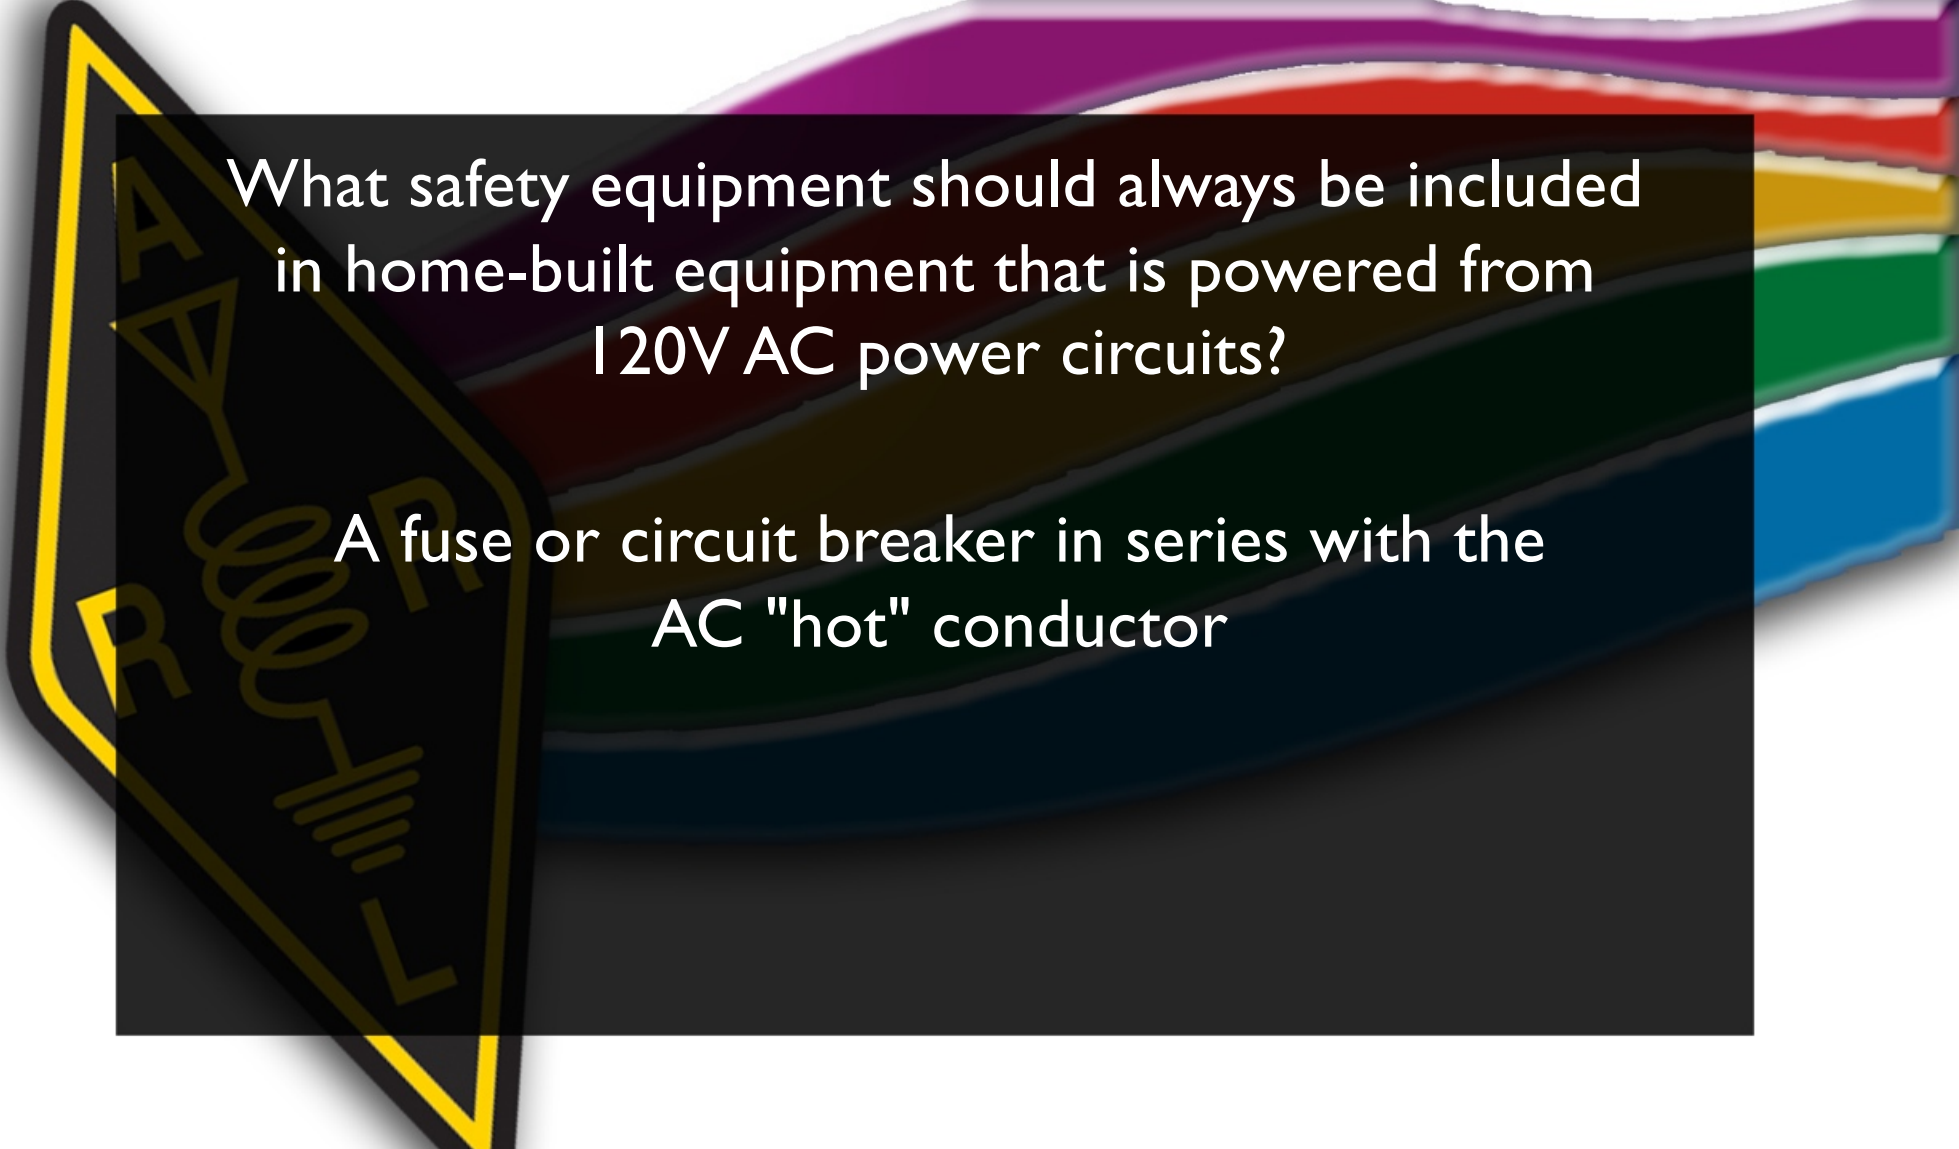


What safety equipment should always be included in home-built equipment that is powered from 120V AC power circuits?

A fuse or circuit breaker in series with the AC "hot" conductor




What kind of hazard might exist in a power supply when it is turned off and disconnected?



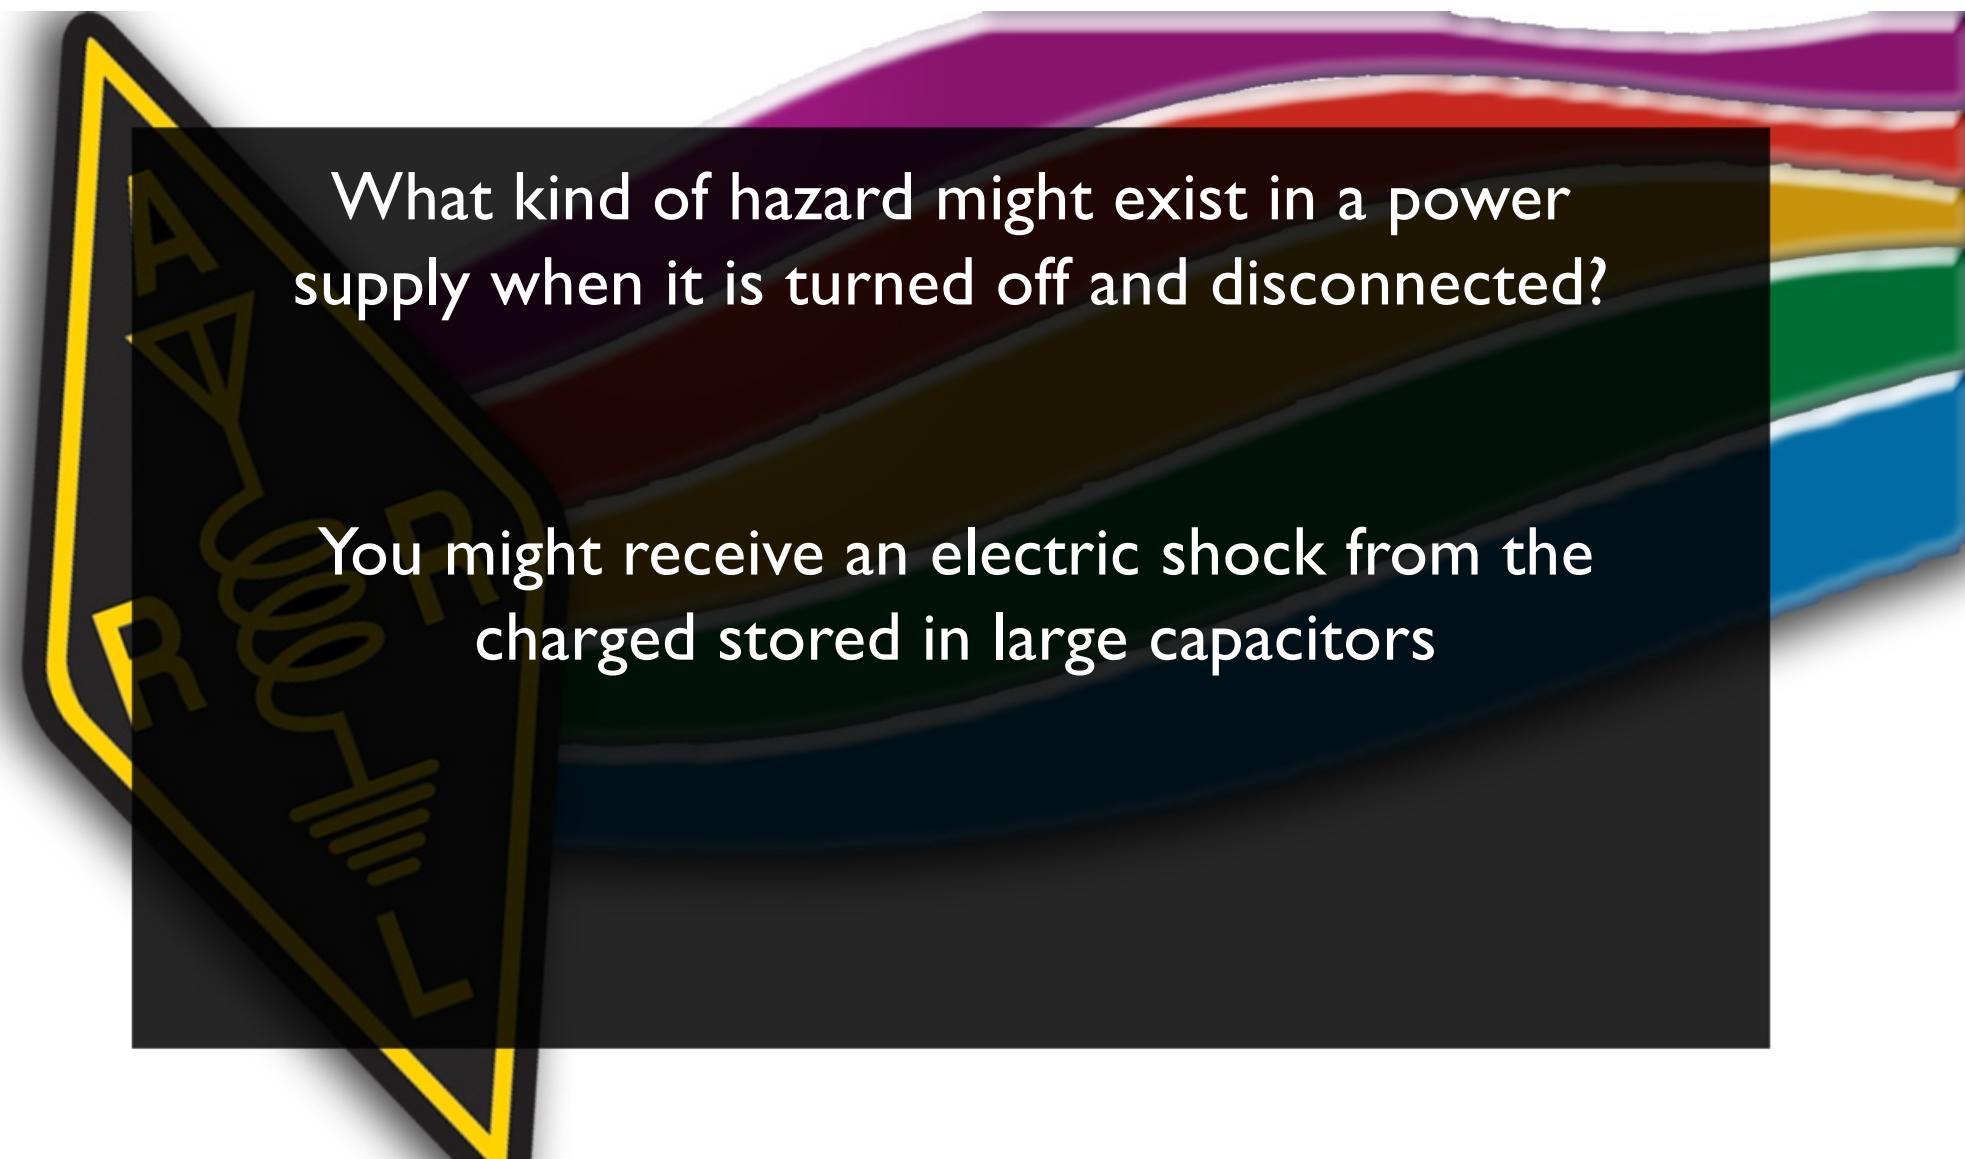


What kind of hazard might exist in a power supply when it is turned off and disconnected?

You might receive an electric shock from the charged stored in large capacitors




When should members of a tower work team wear a hard hat and safety glasses?

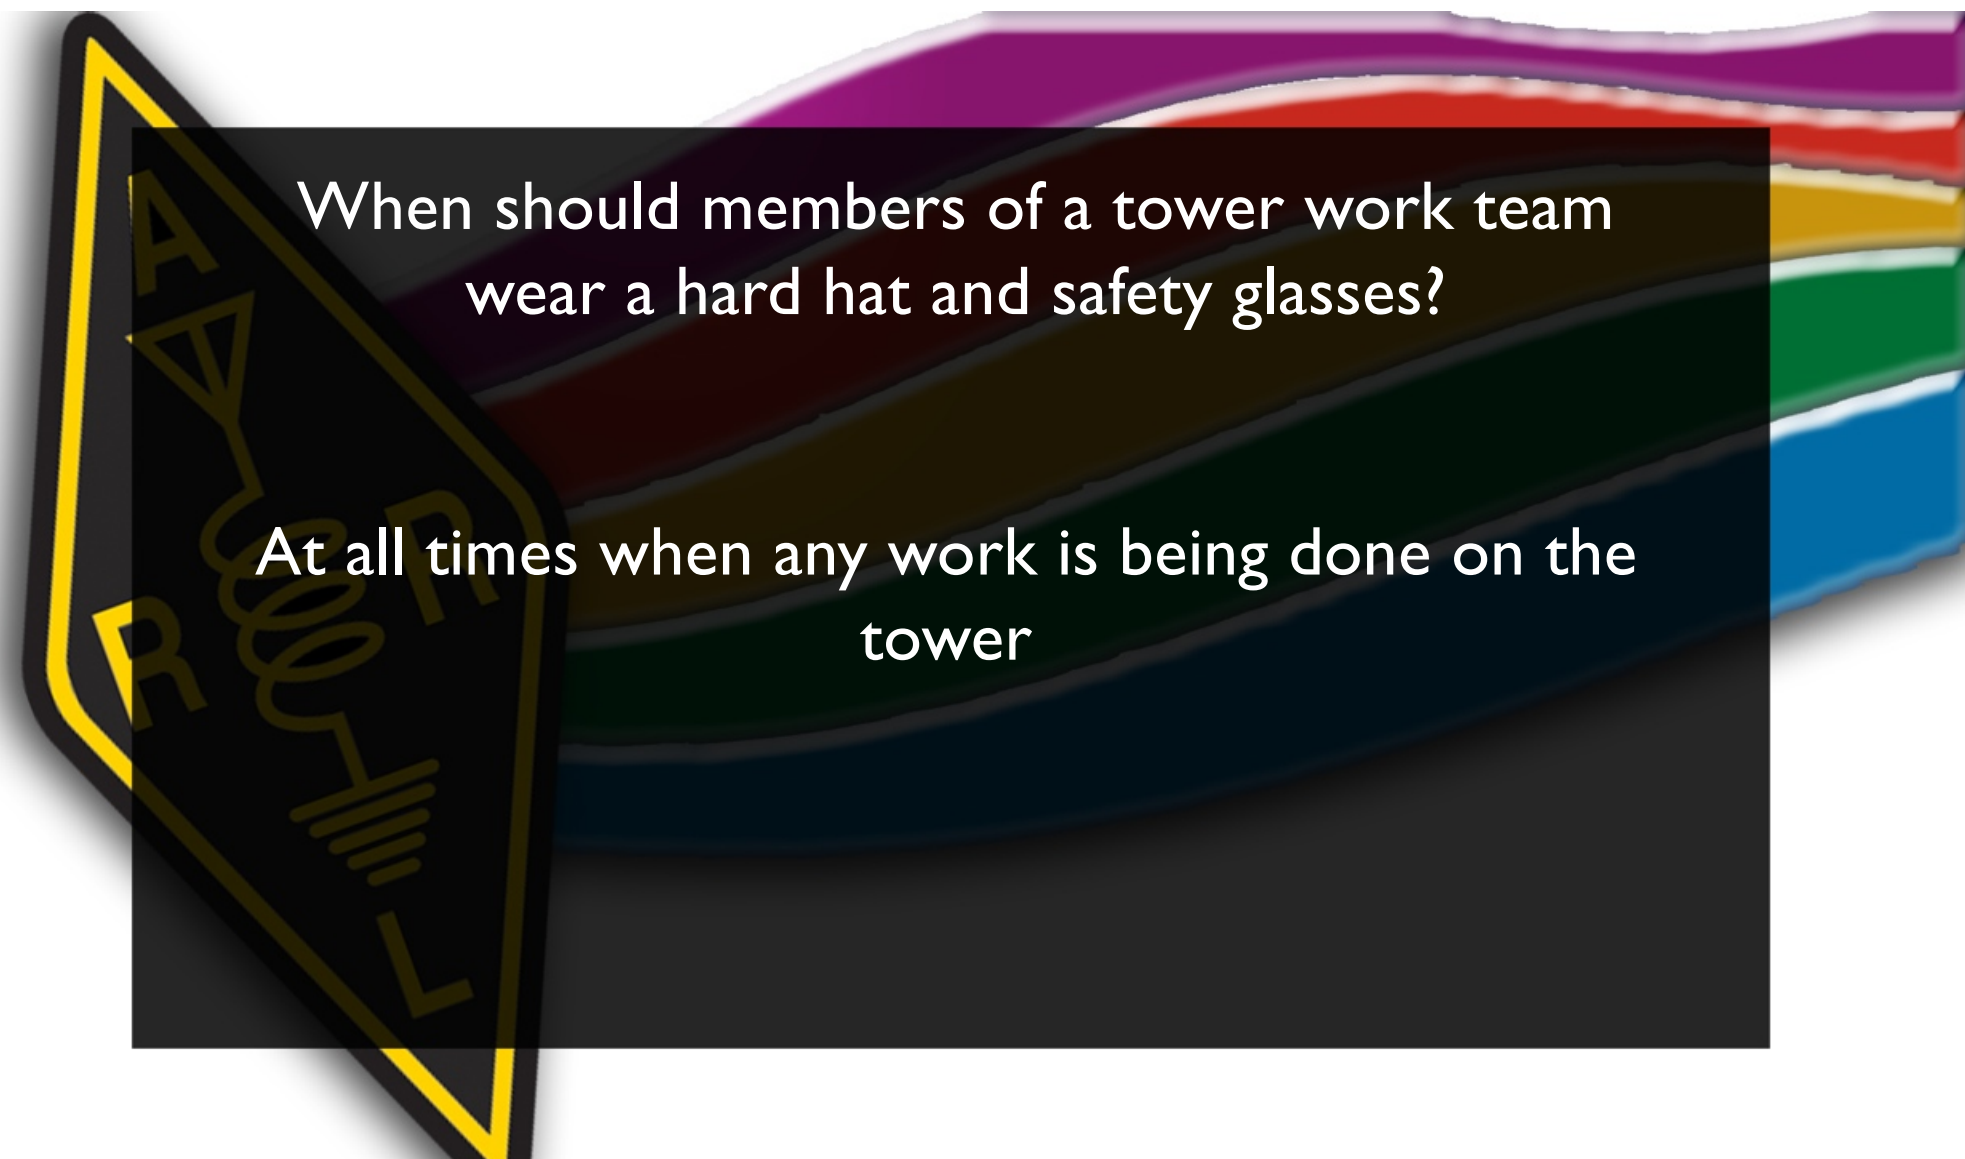

When should members of a tower work team wear a hard hat and safety glasses?

At all times when any work is being done on the tower

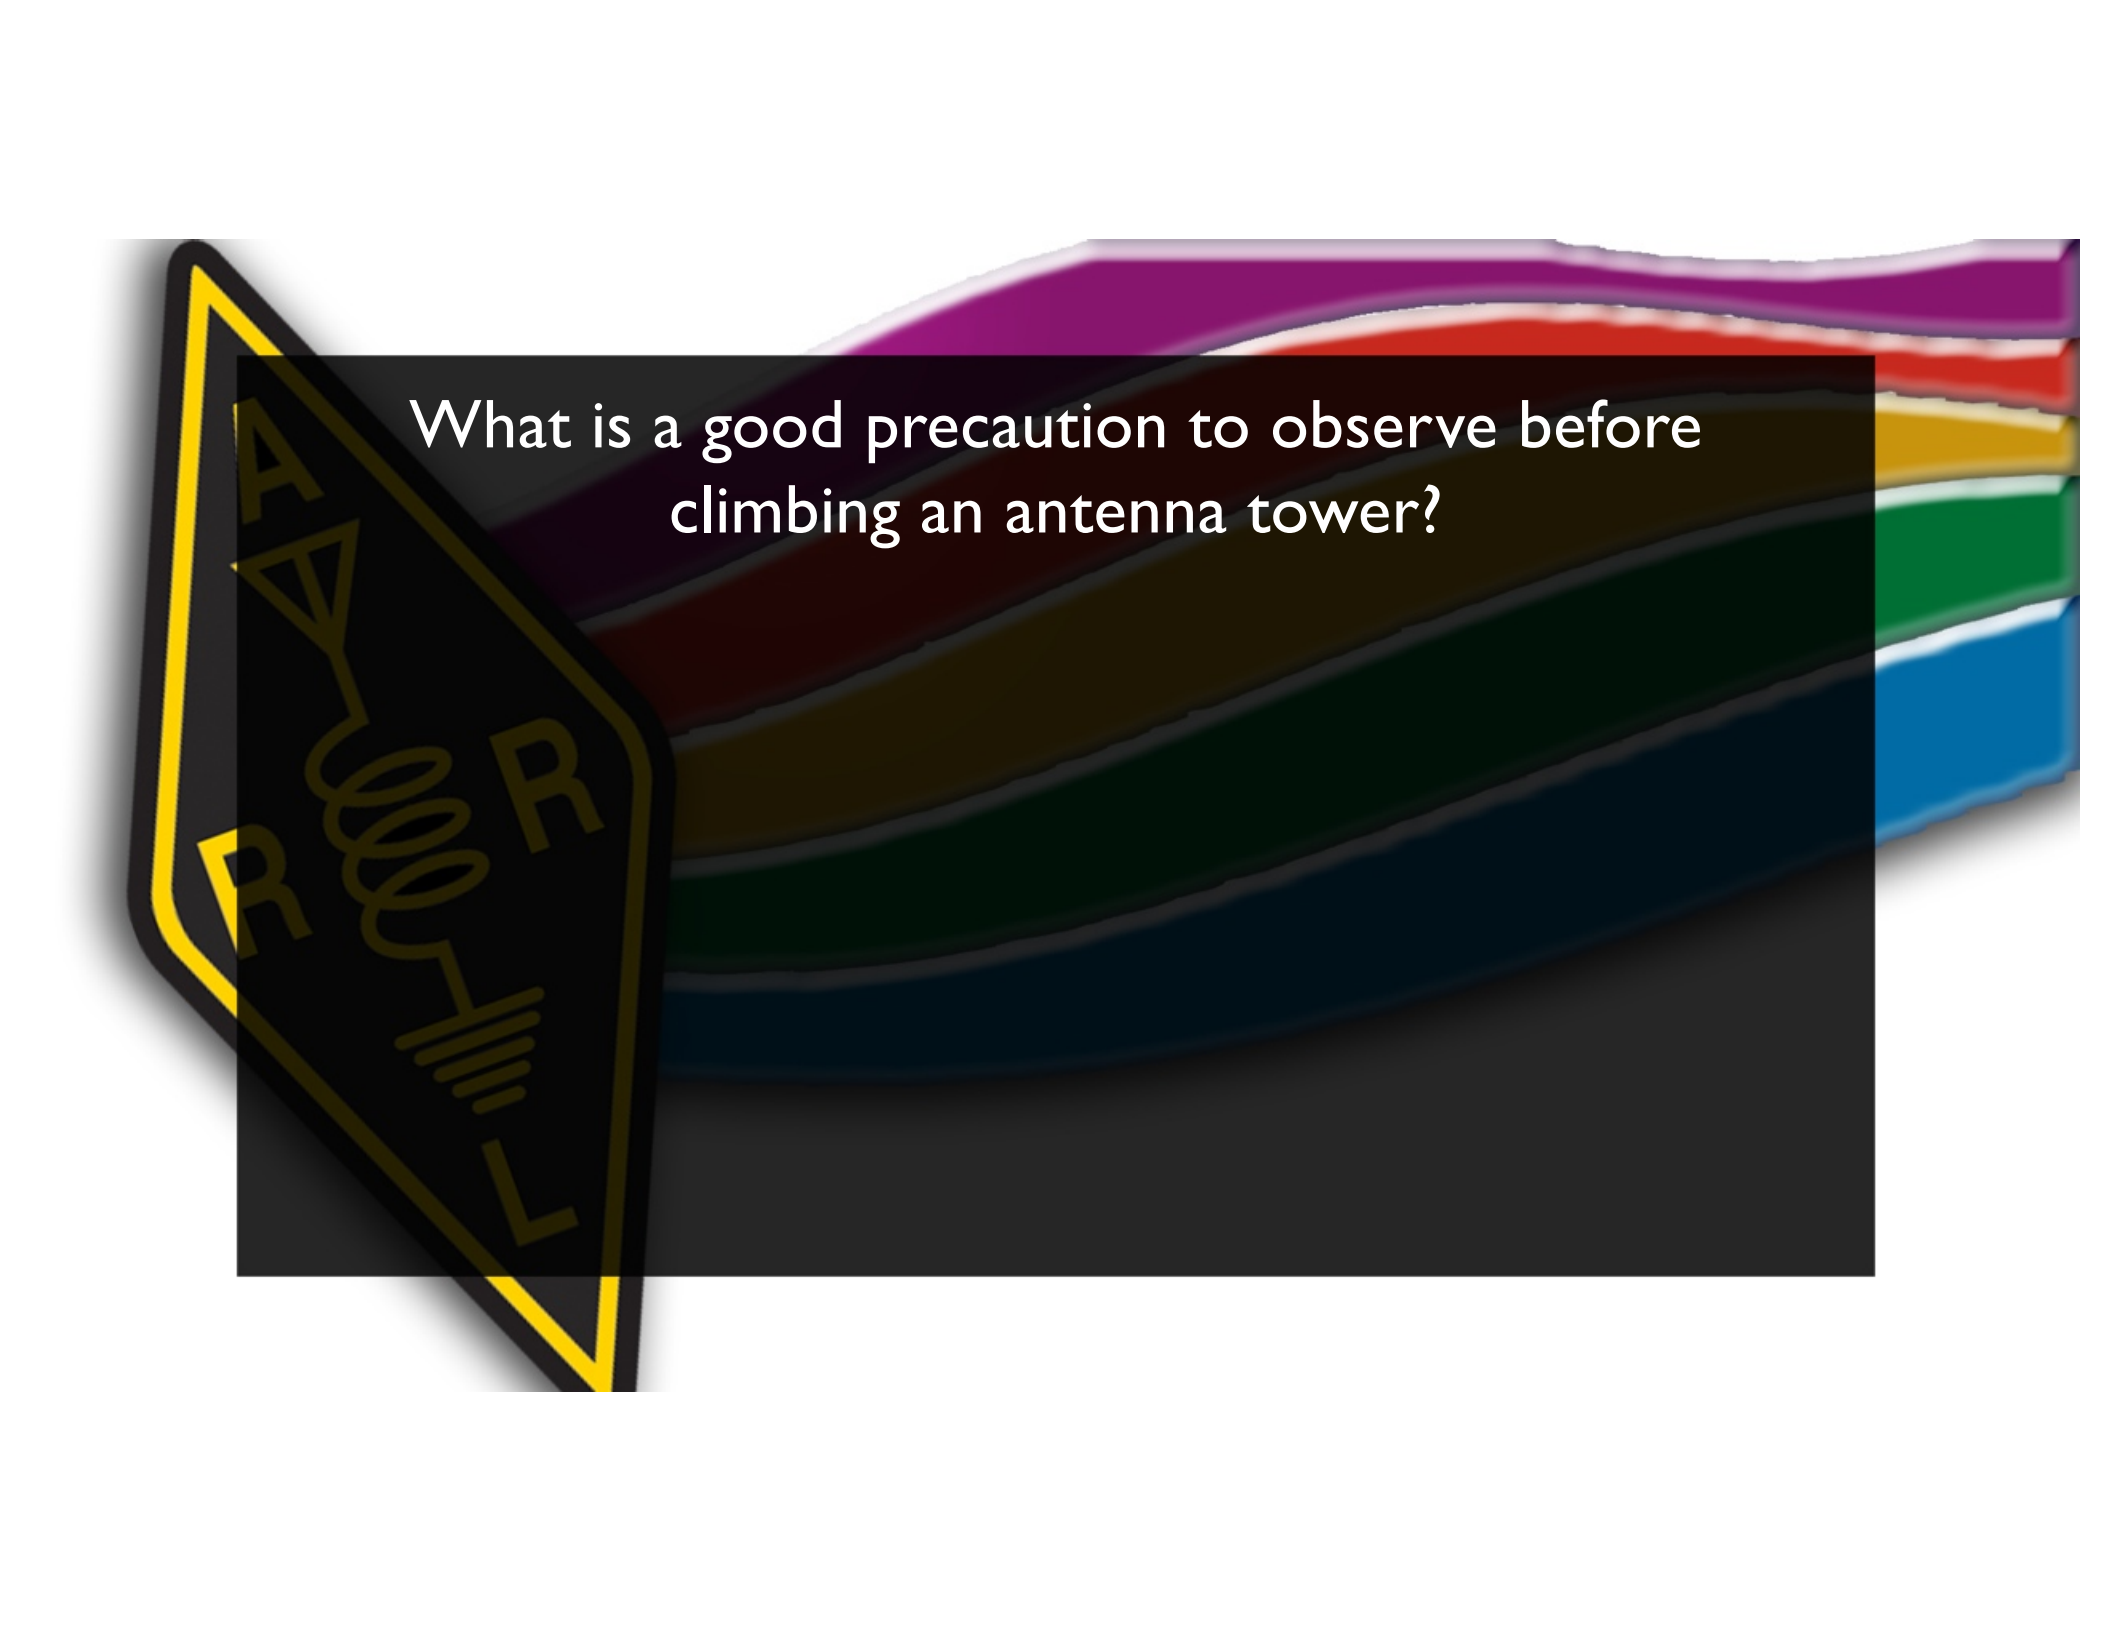


What is a good precaution to observe before climbing an antenna tower?






What is a good precaution to observe before climbing an antenna tower?

Put on a climbing harness and safety glasses

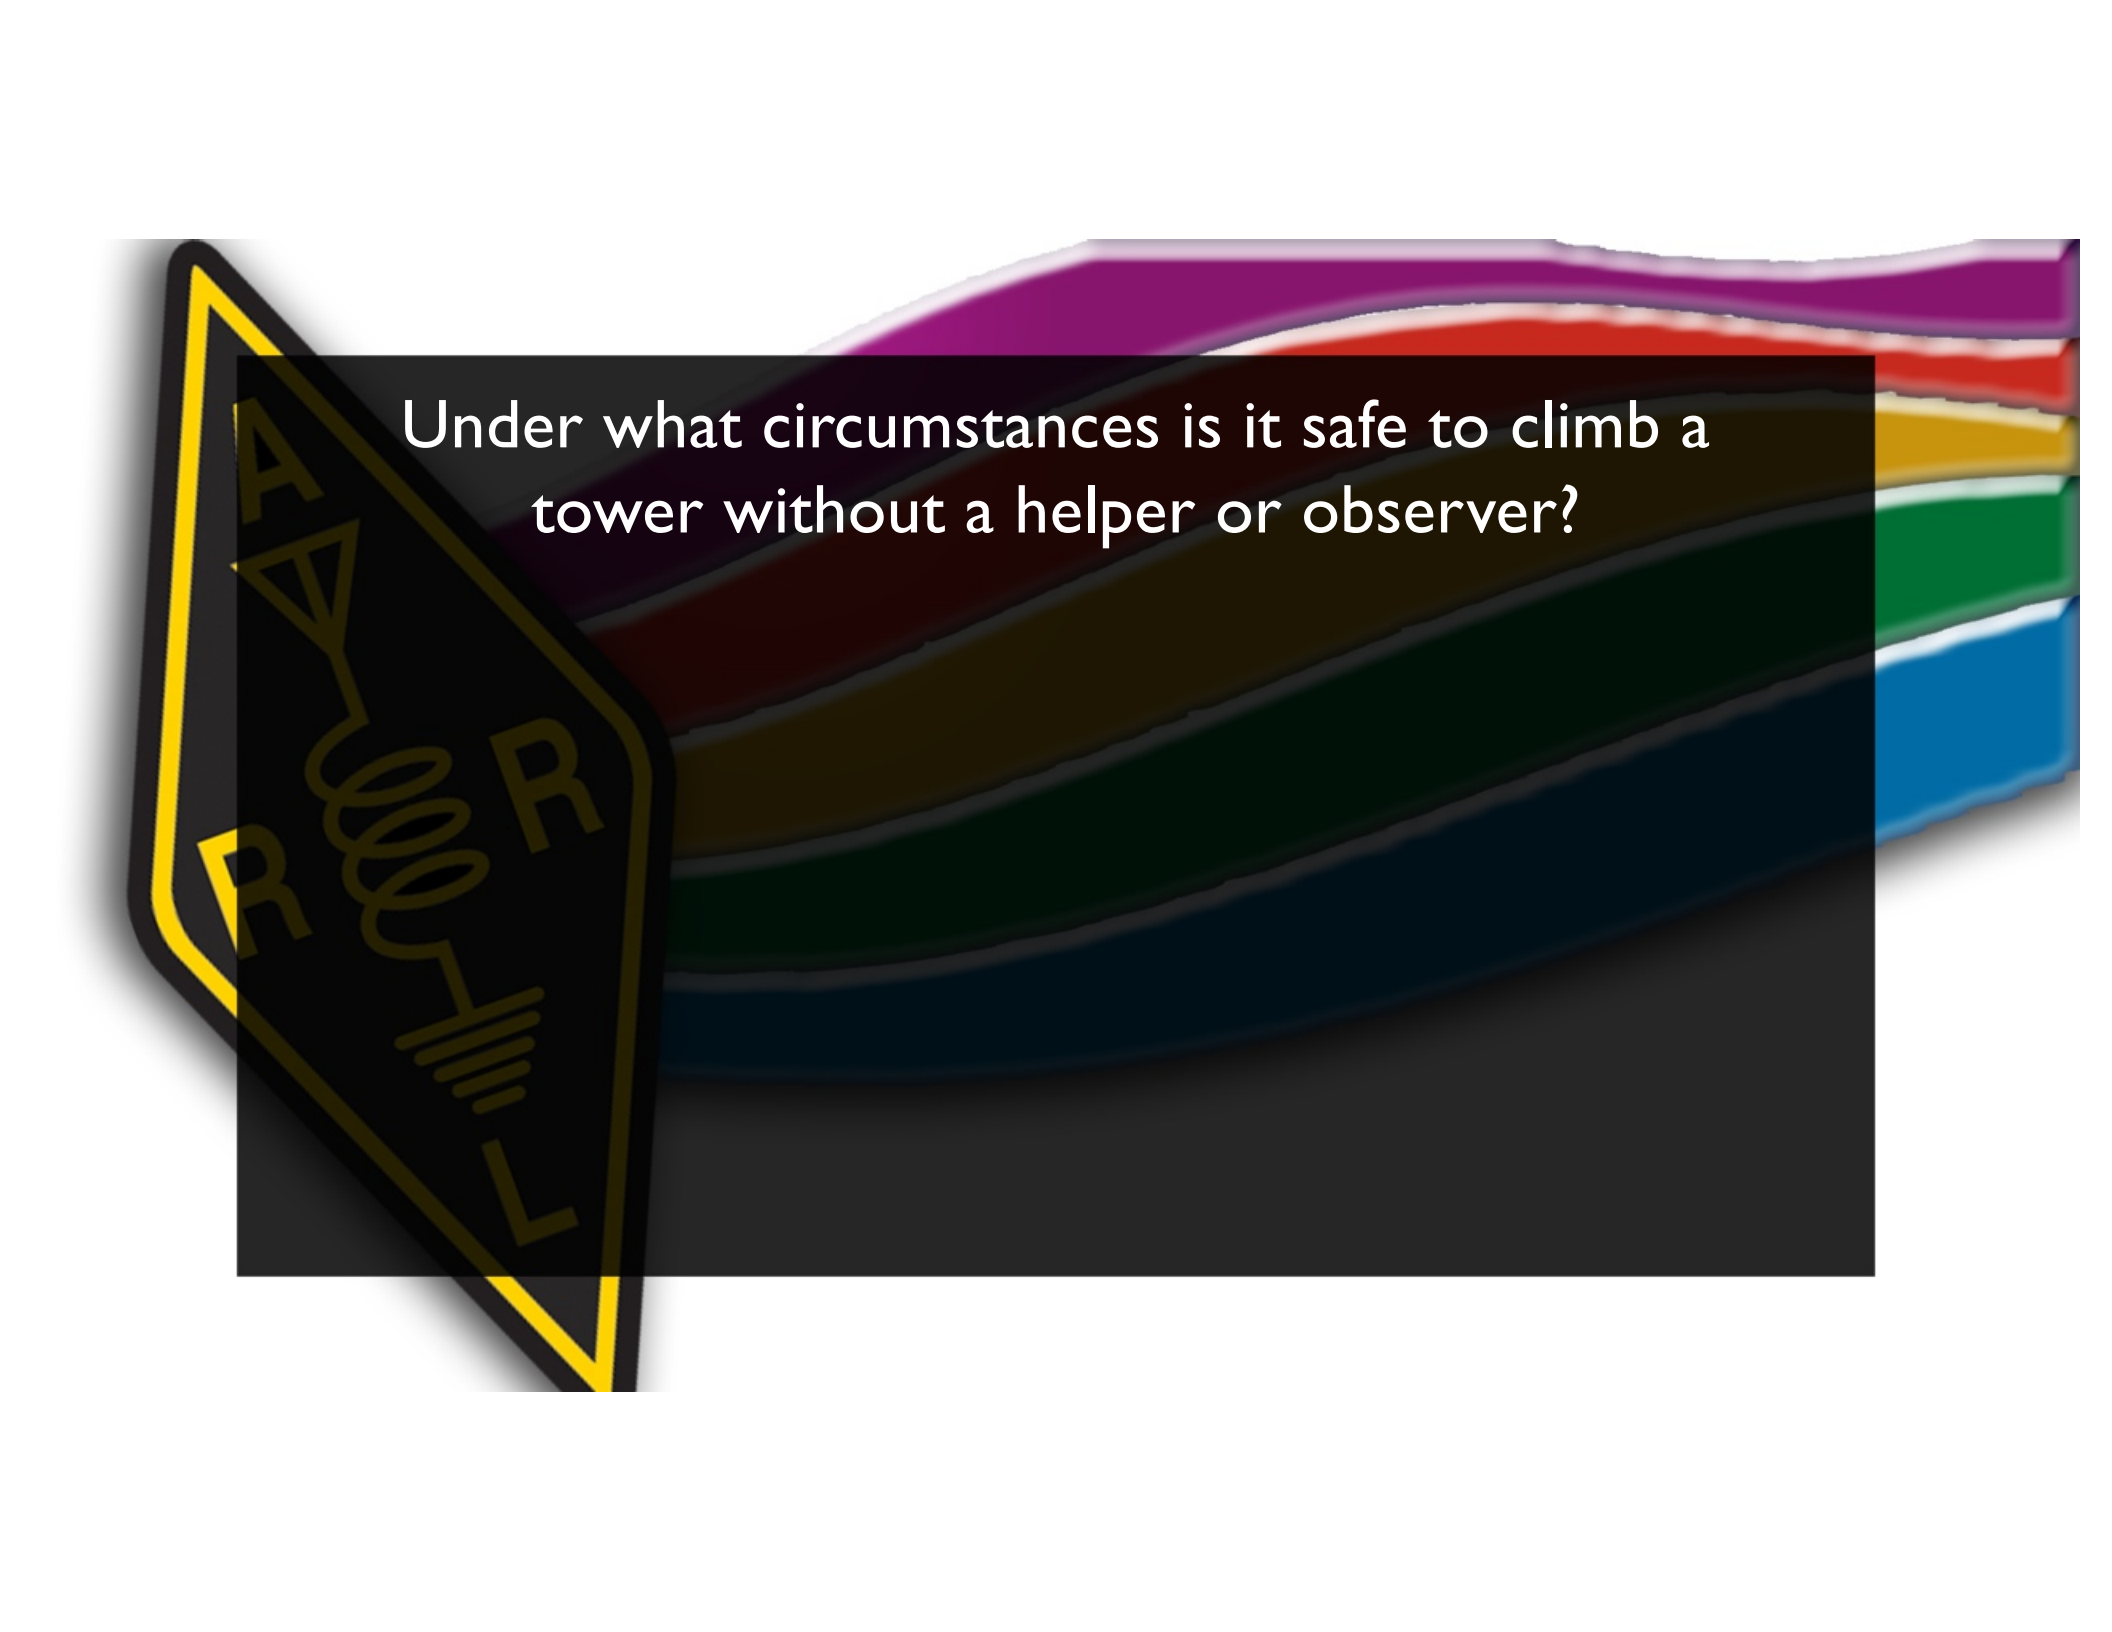


Under what circumstances is it safe to climb a tower without a helper or observer?

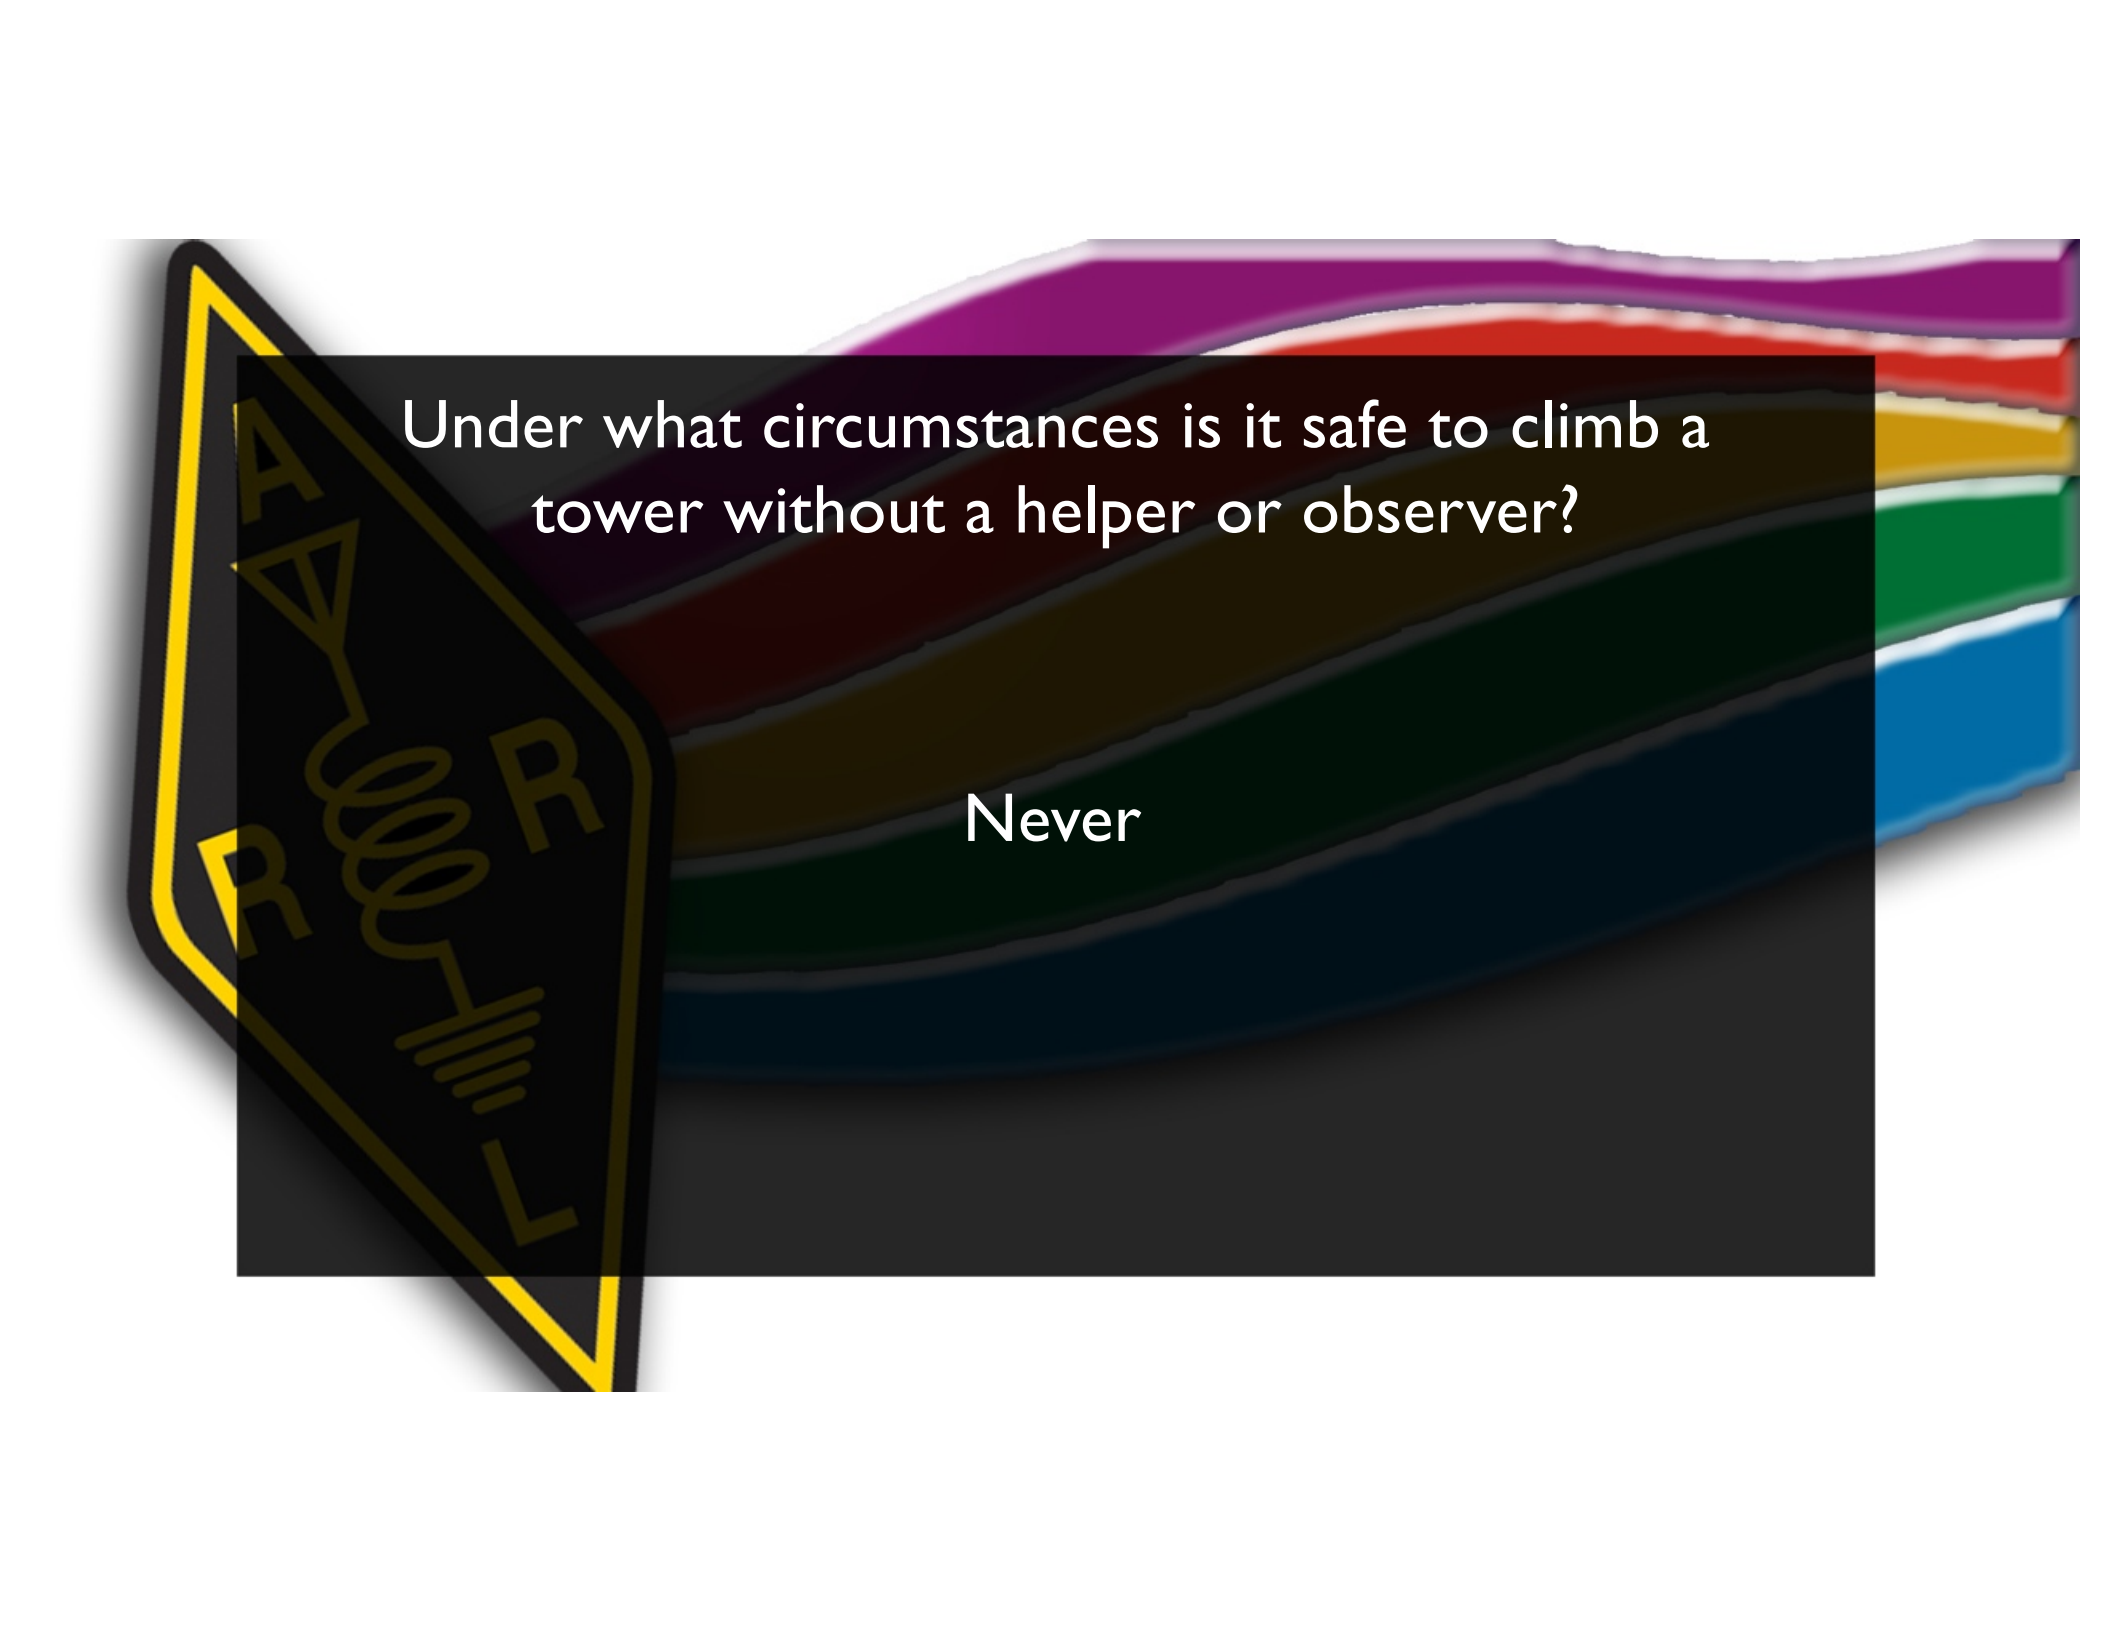


Under what circumstances is it safe to climb a tower without a helper or observer?

Never



What is an important safety precaution to observe when putting up an antenna tower?



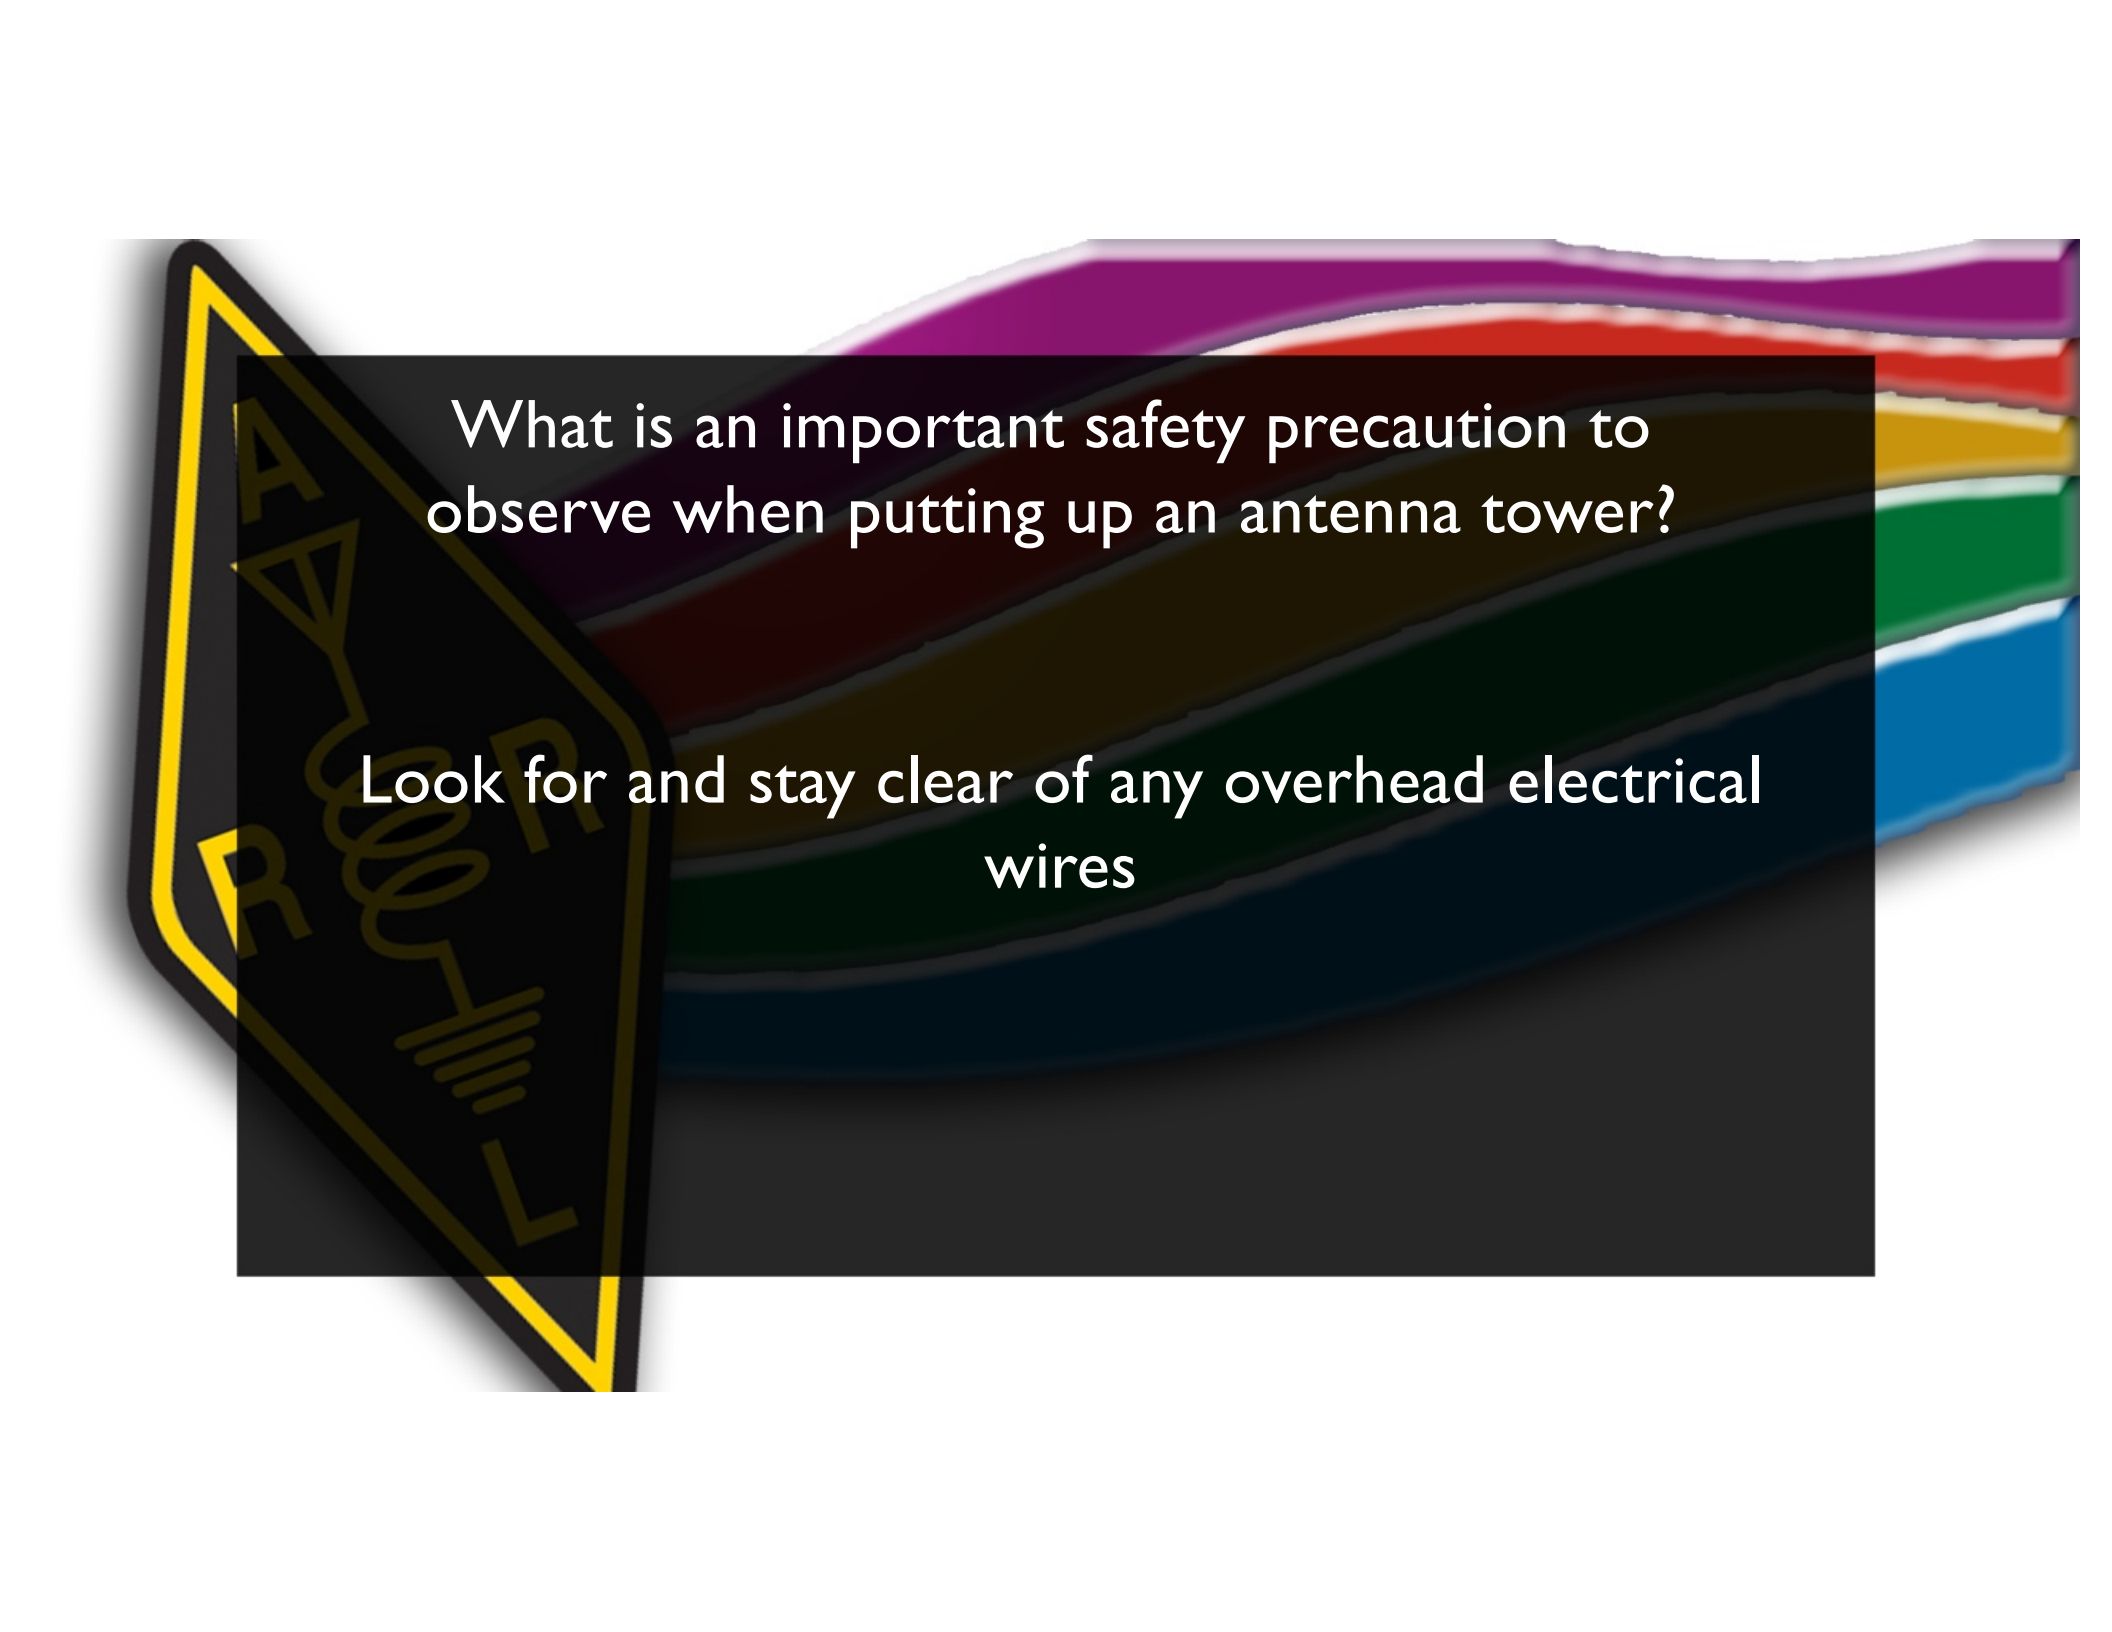

What is an important safety precaution to observe when putting up an antenna tower?

Look for and stay clear of any overhead electrical wires


What is the purpose of a gin pole?






What is the purpose of a gin pole?

To lift tower sections or antennas

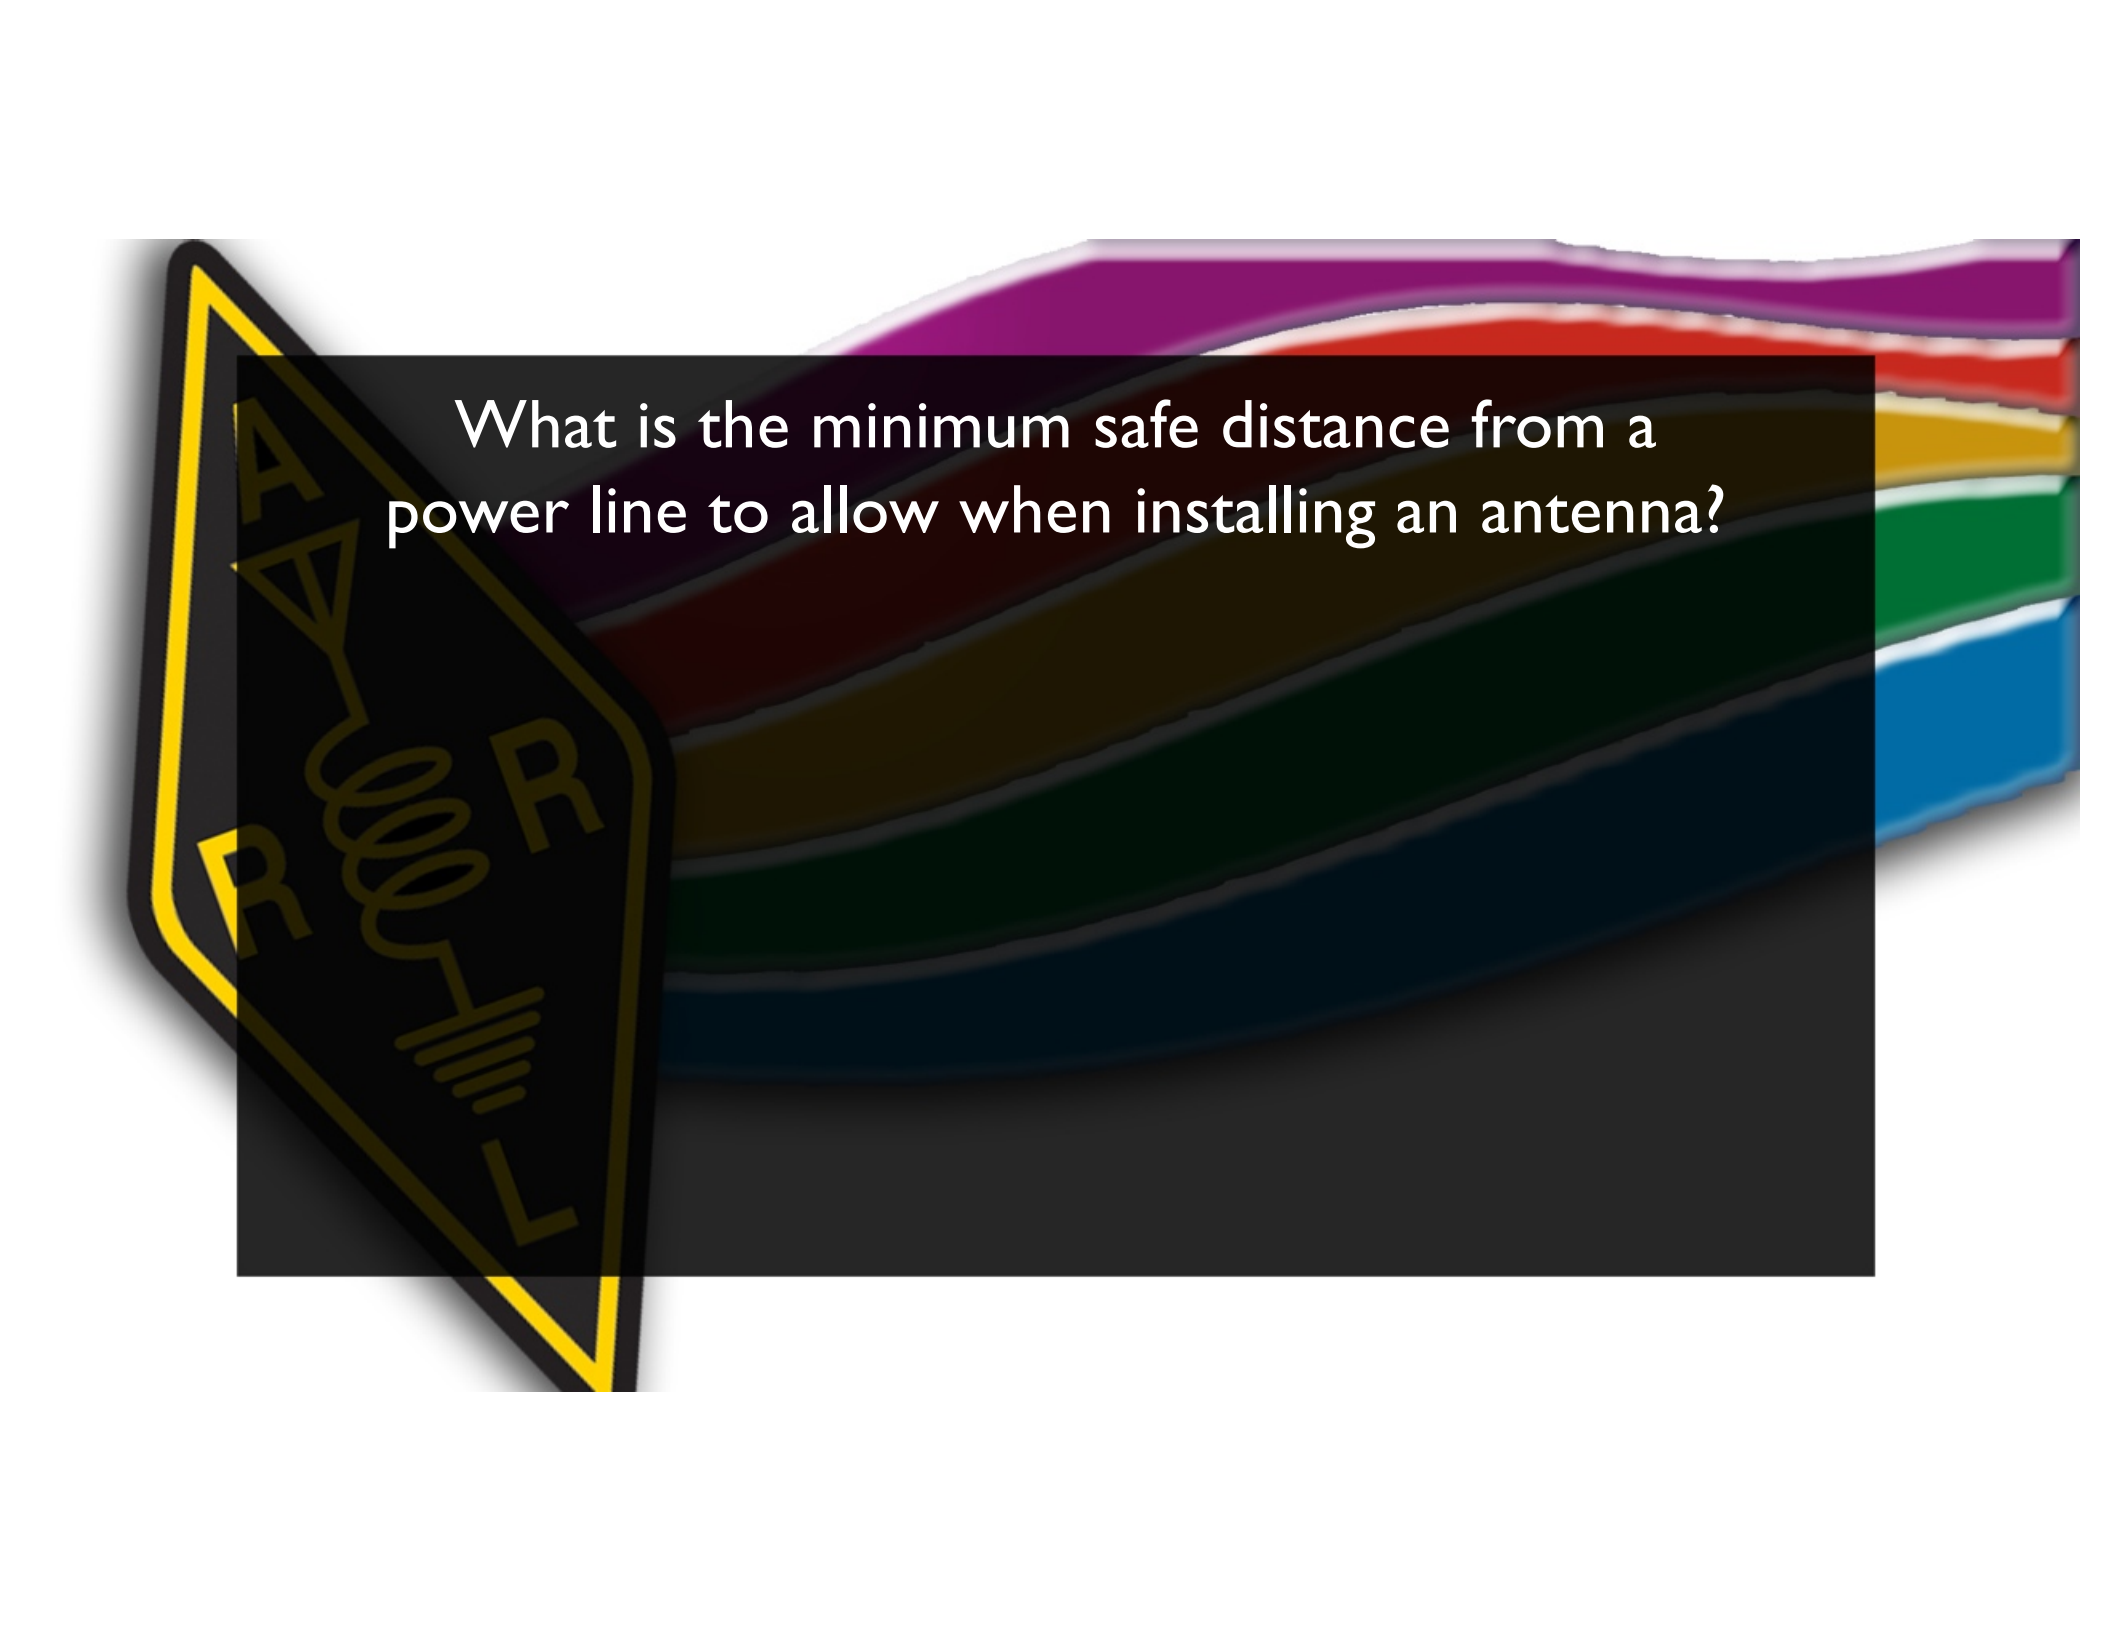


What is the minimum safe distance from a power line to allow when installing an antenna?

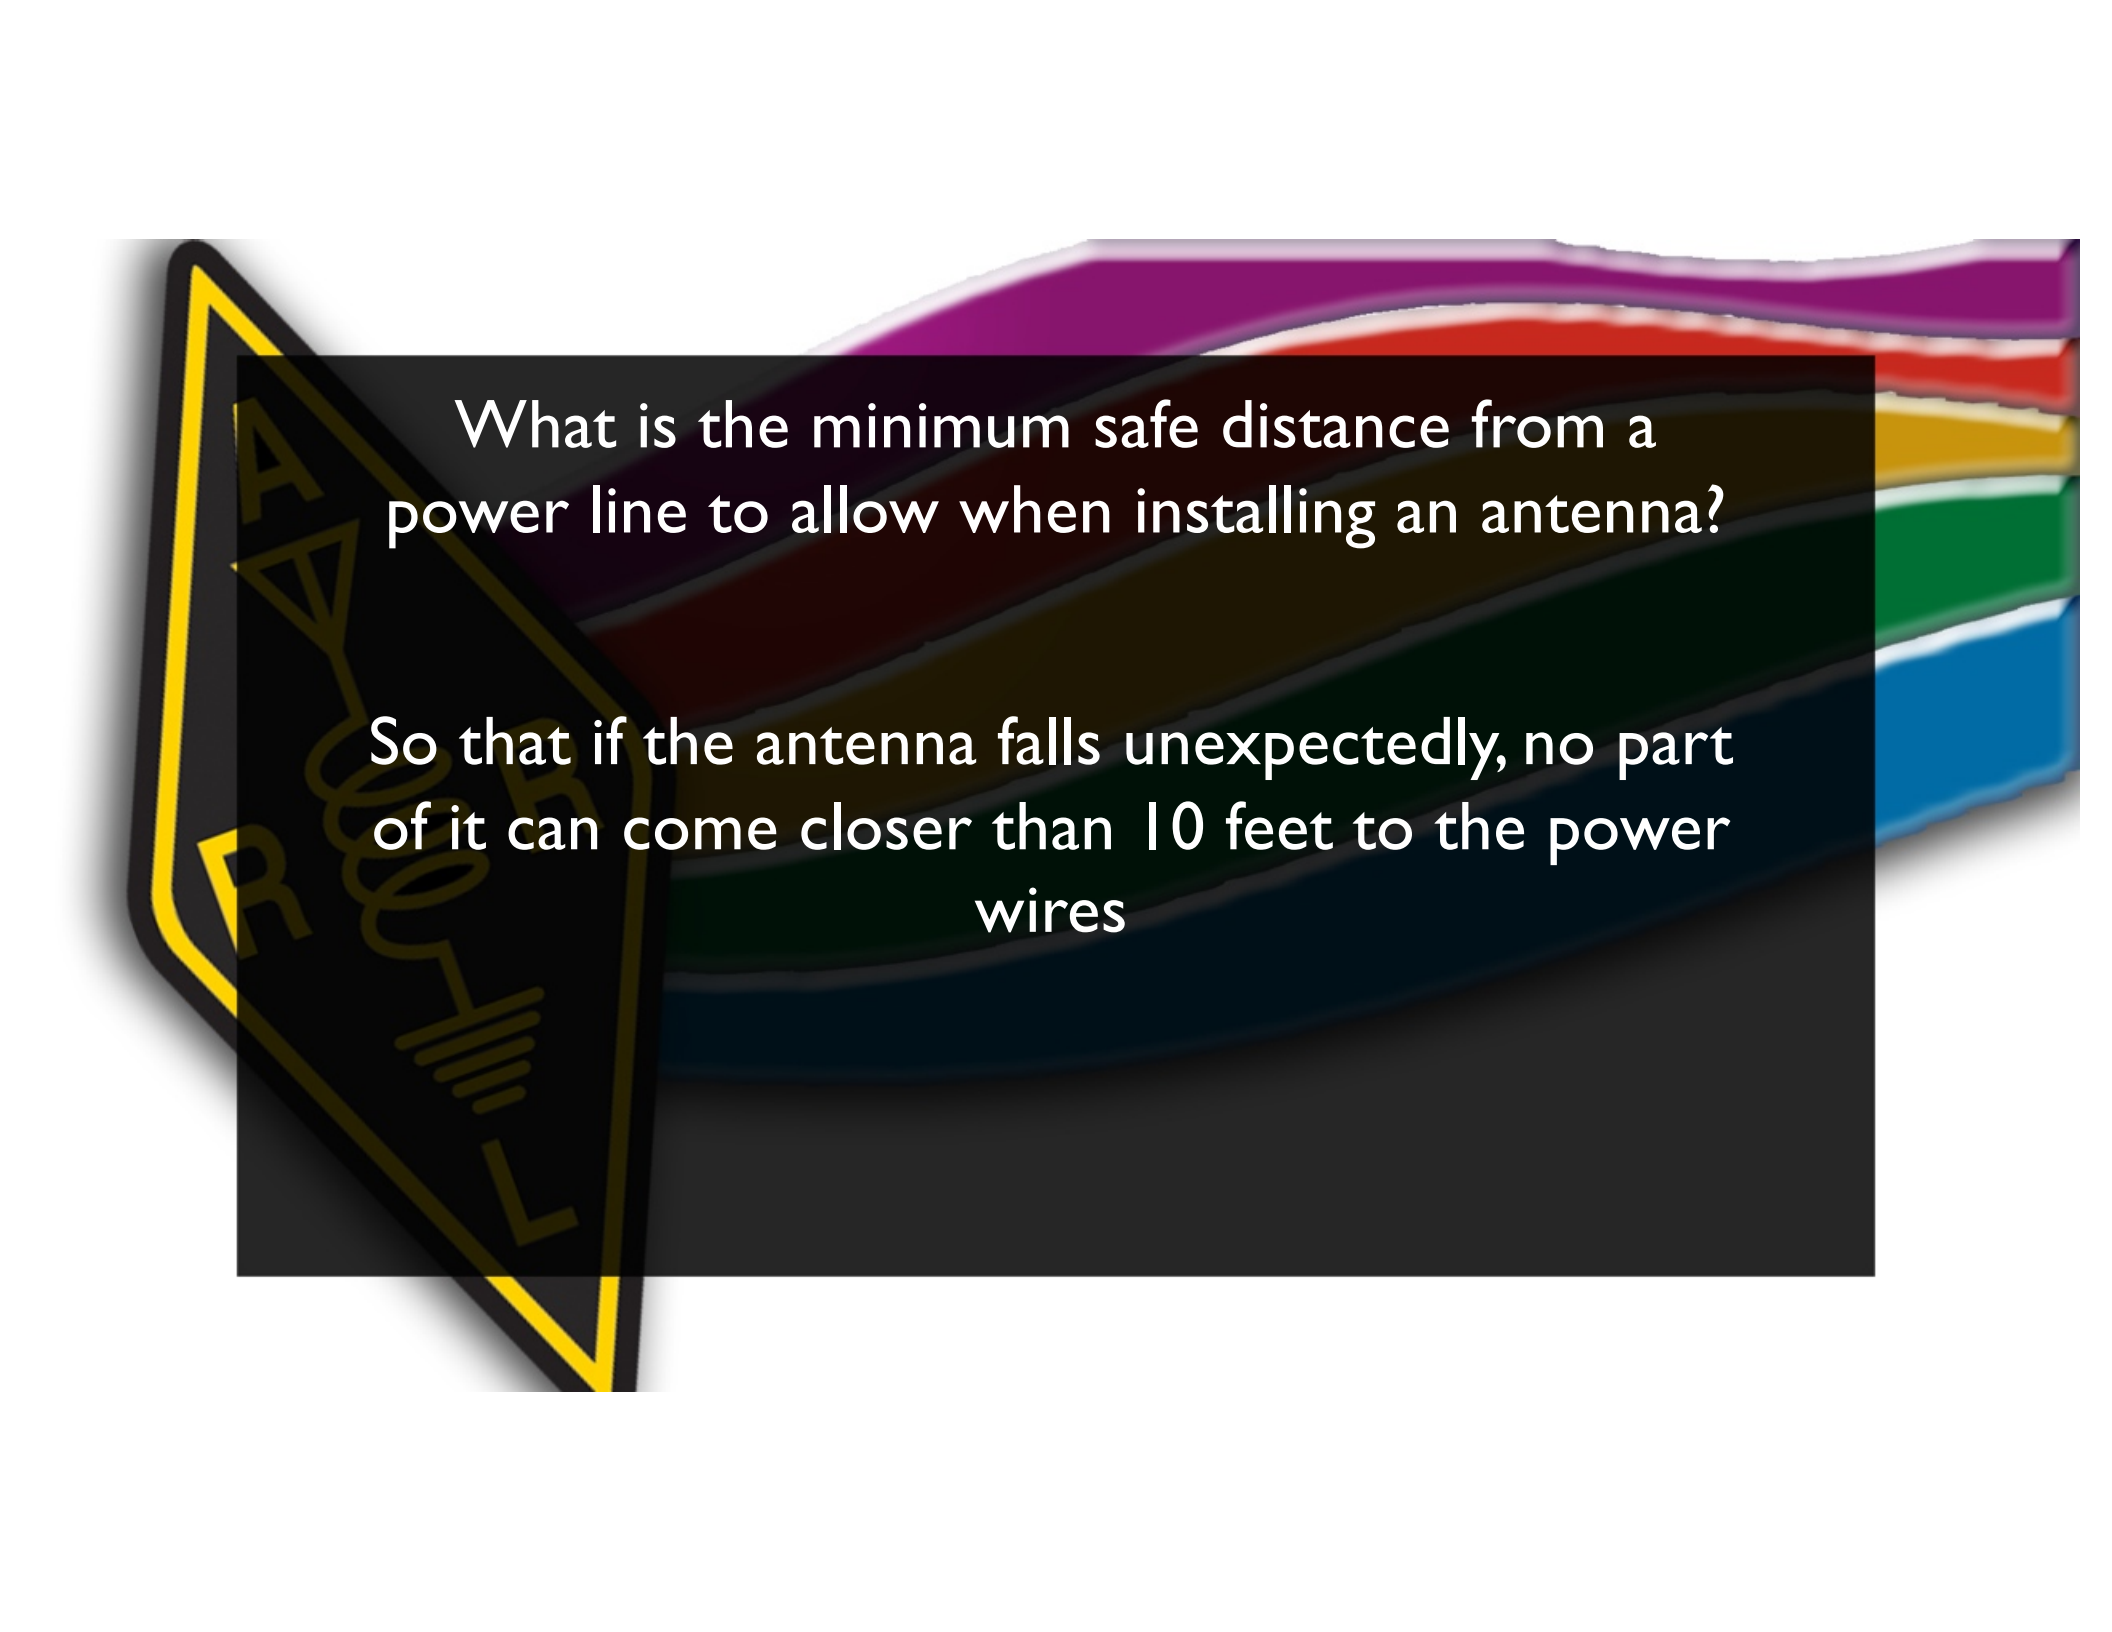


What is the minimum safe distance from a power line to allow when installing an antenna?

So that if the antenna falls unexpectedly, no part of it can come closer than 10 feet to the power wires




What is an important safety rule to remember when using a crank-up tower?






What is an important safety rule to remember when using a crank-up tower?

This type of tower must never be climbed unless it is in the fully retracted position

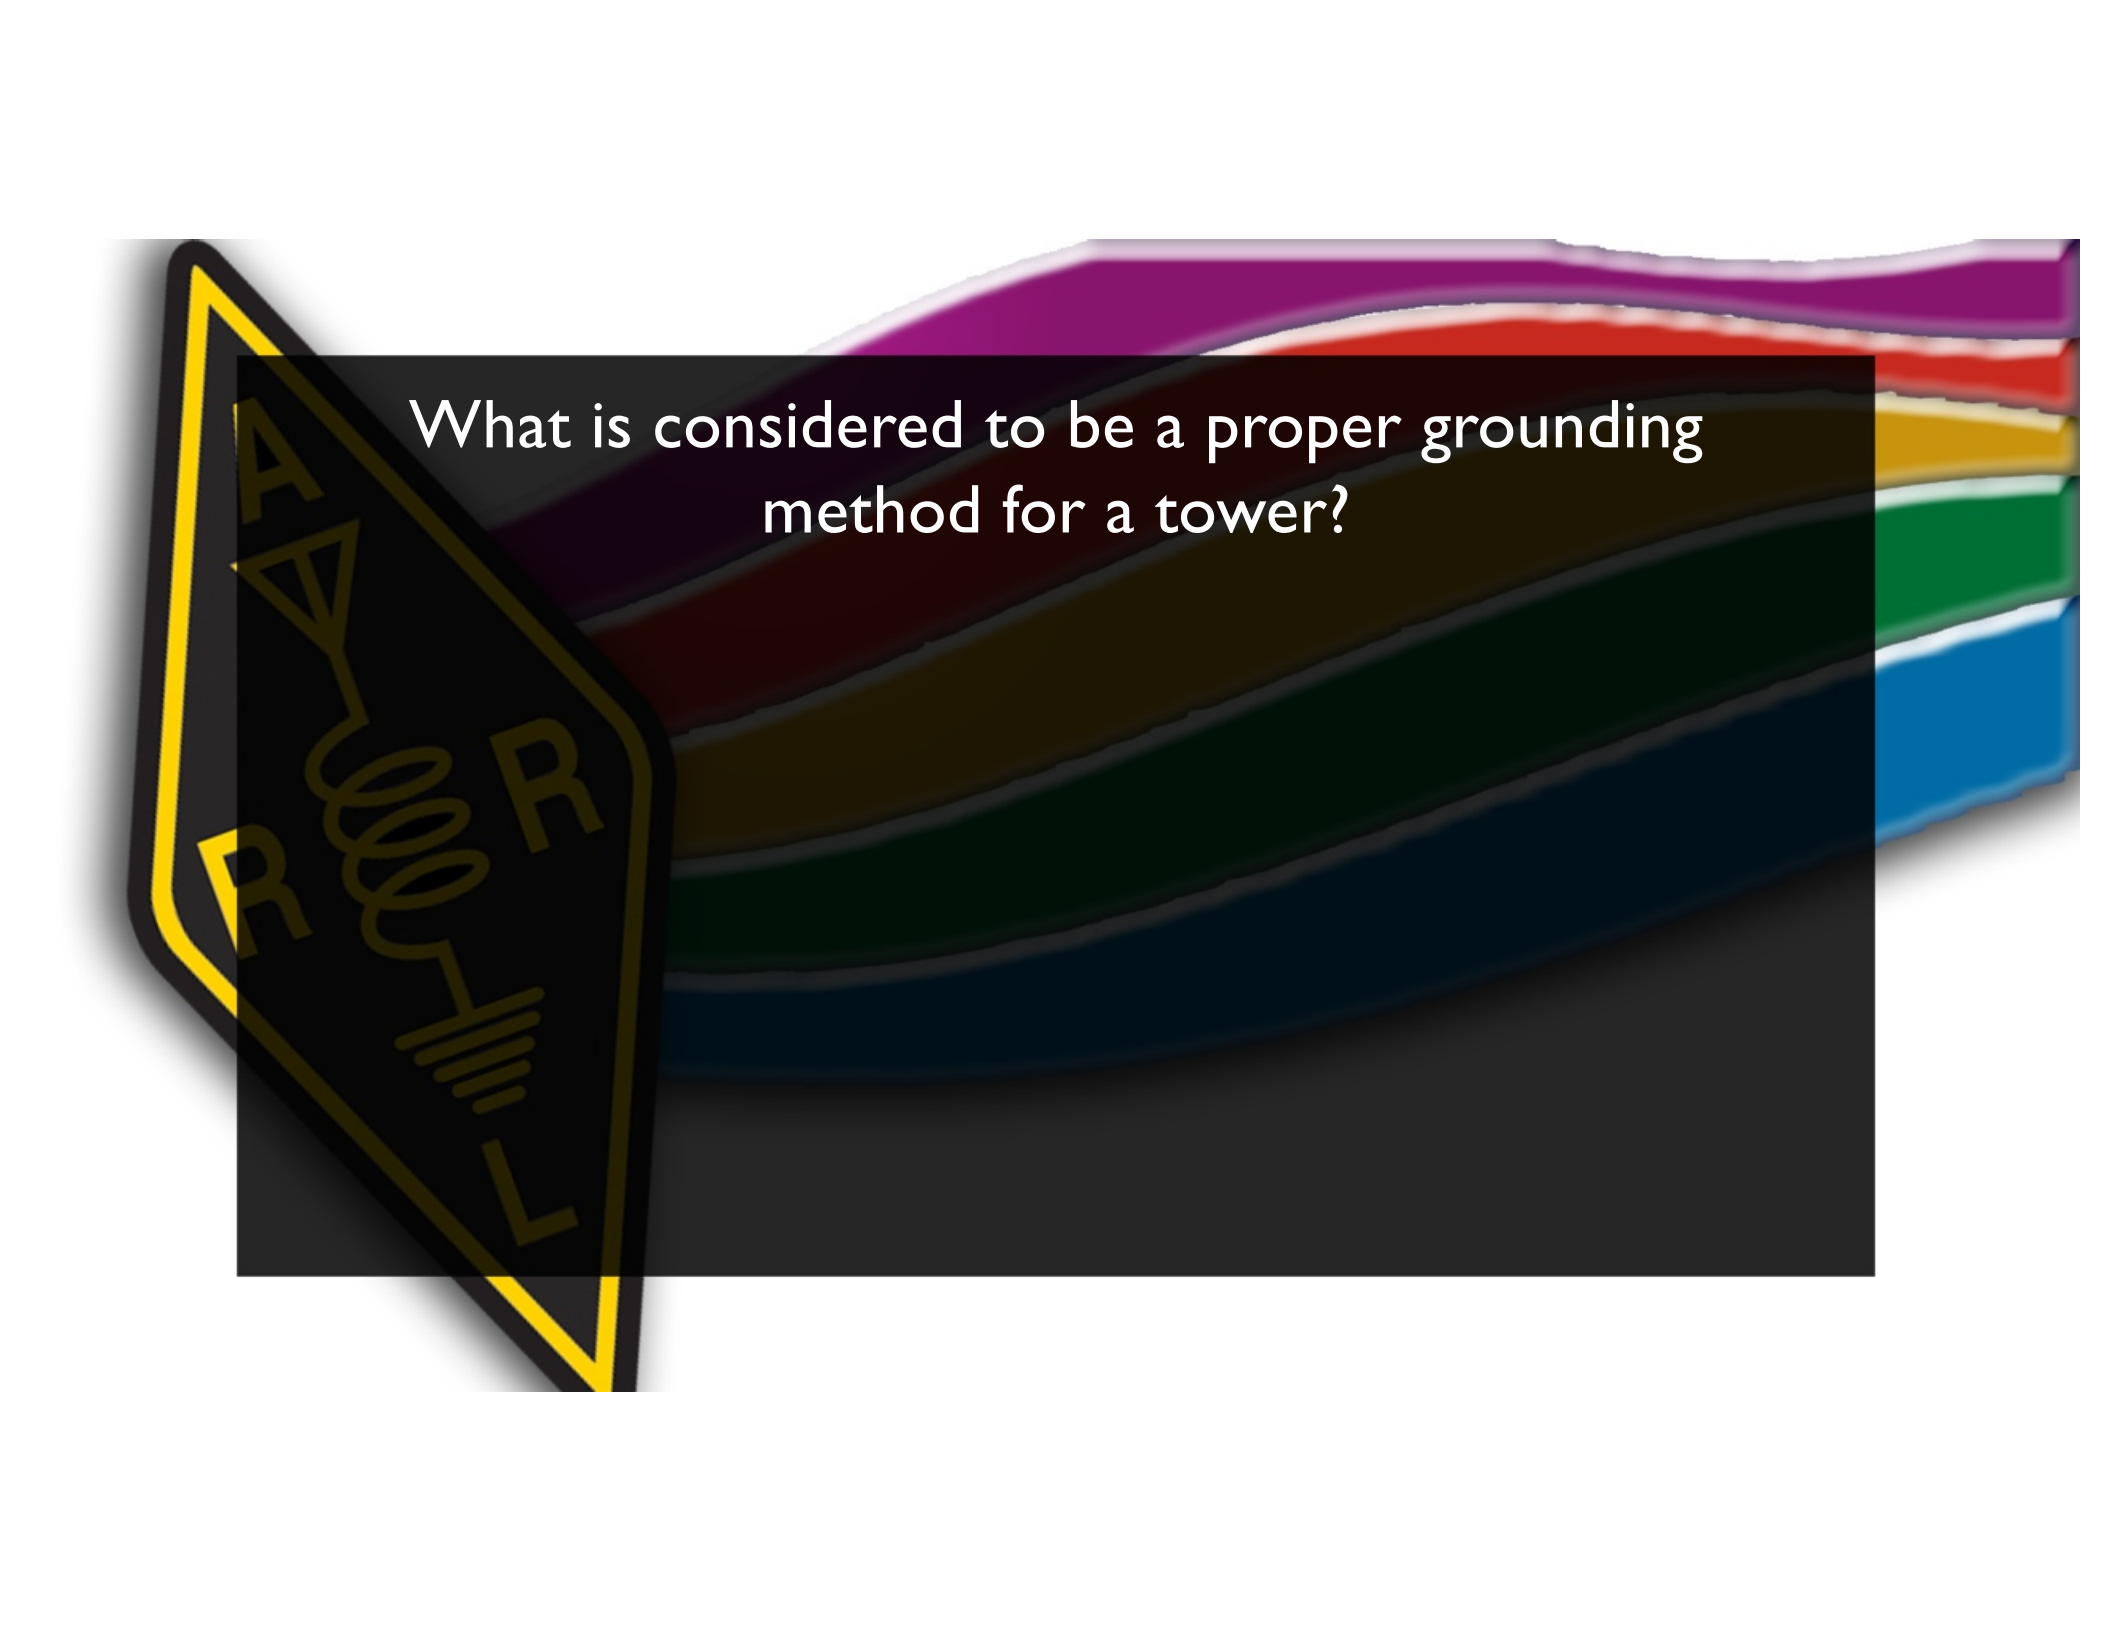

What is considered to be a proper grounding method for a tower?



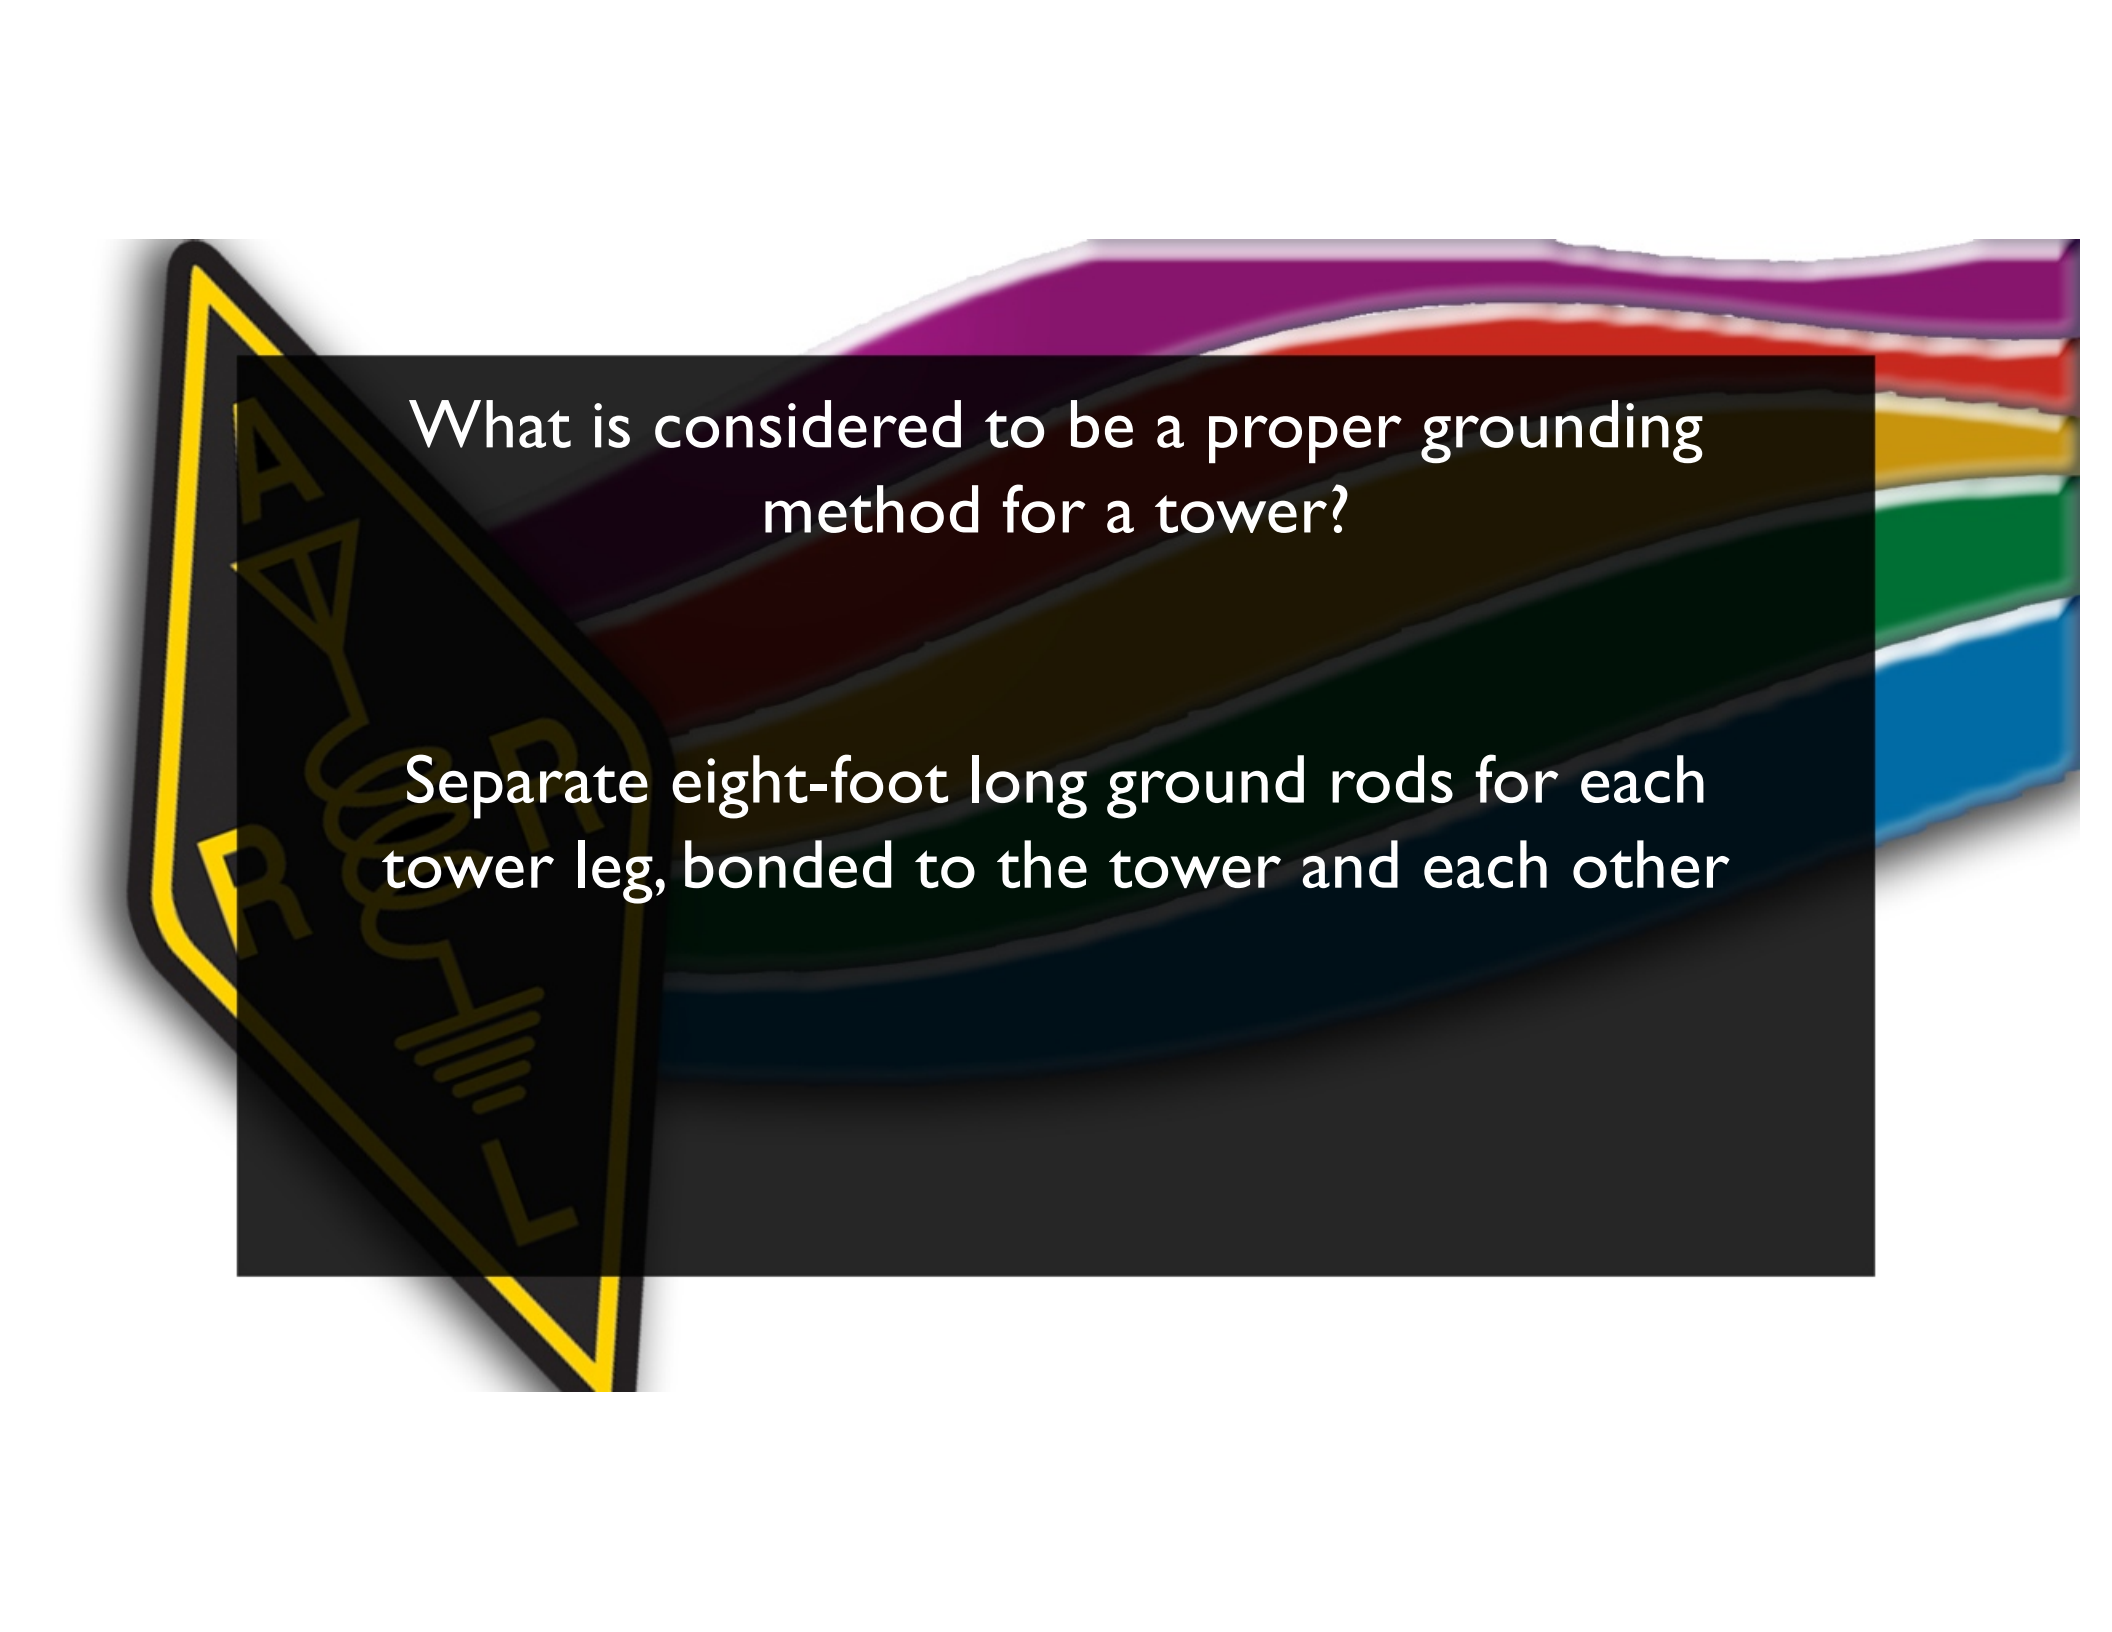

What is considered to be a proper grounding method for a tower?

Separate eight-foot long ground rods for each tower leg, bonded to the tower and each other




Why should you avoid attaching an antenna to a utility pole?





Why should you avoid attaching an antenna to a utility pole?

The antenna could contact high-voltage power wires



What is true concerning grounding conductors used for lightning protection?





What is true concerning grounding conductors
used for lightning protection?

Sharp bends must be avoided






What establishes grounding requirements for an amateur radio tower or antenna?




What establishes grounding requirements for an amateur radio tower or antenna?

Local electrical codes



What is good practice when installing ground wires on a tower for lightning protection?



What is good practice when installing ground wires on a tower for lightning protection?

Ensure that connections are short and direct




What type of radiation are VHF and UHF radio signals?




What type of radiation are VHF and UHF radio signals?

Non-ionizing radiation

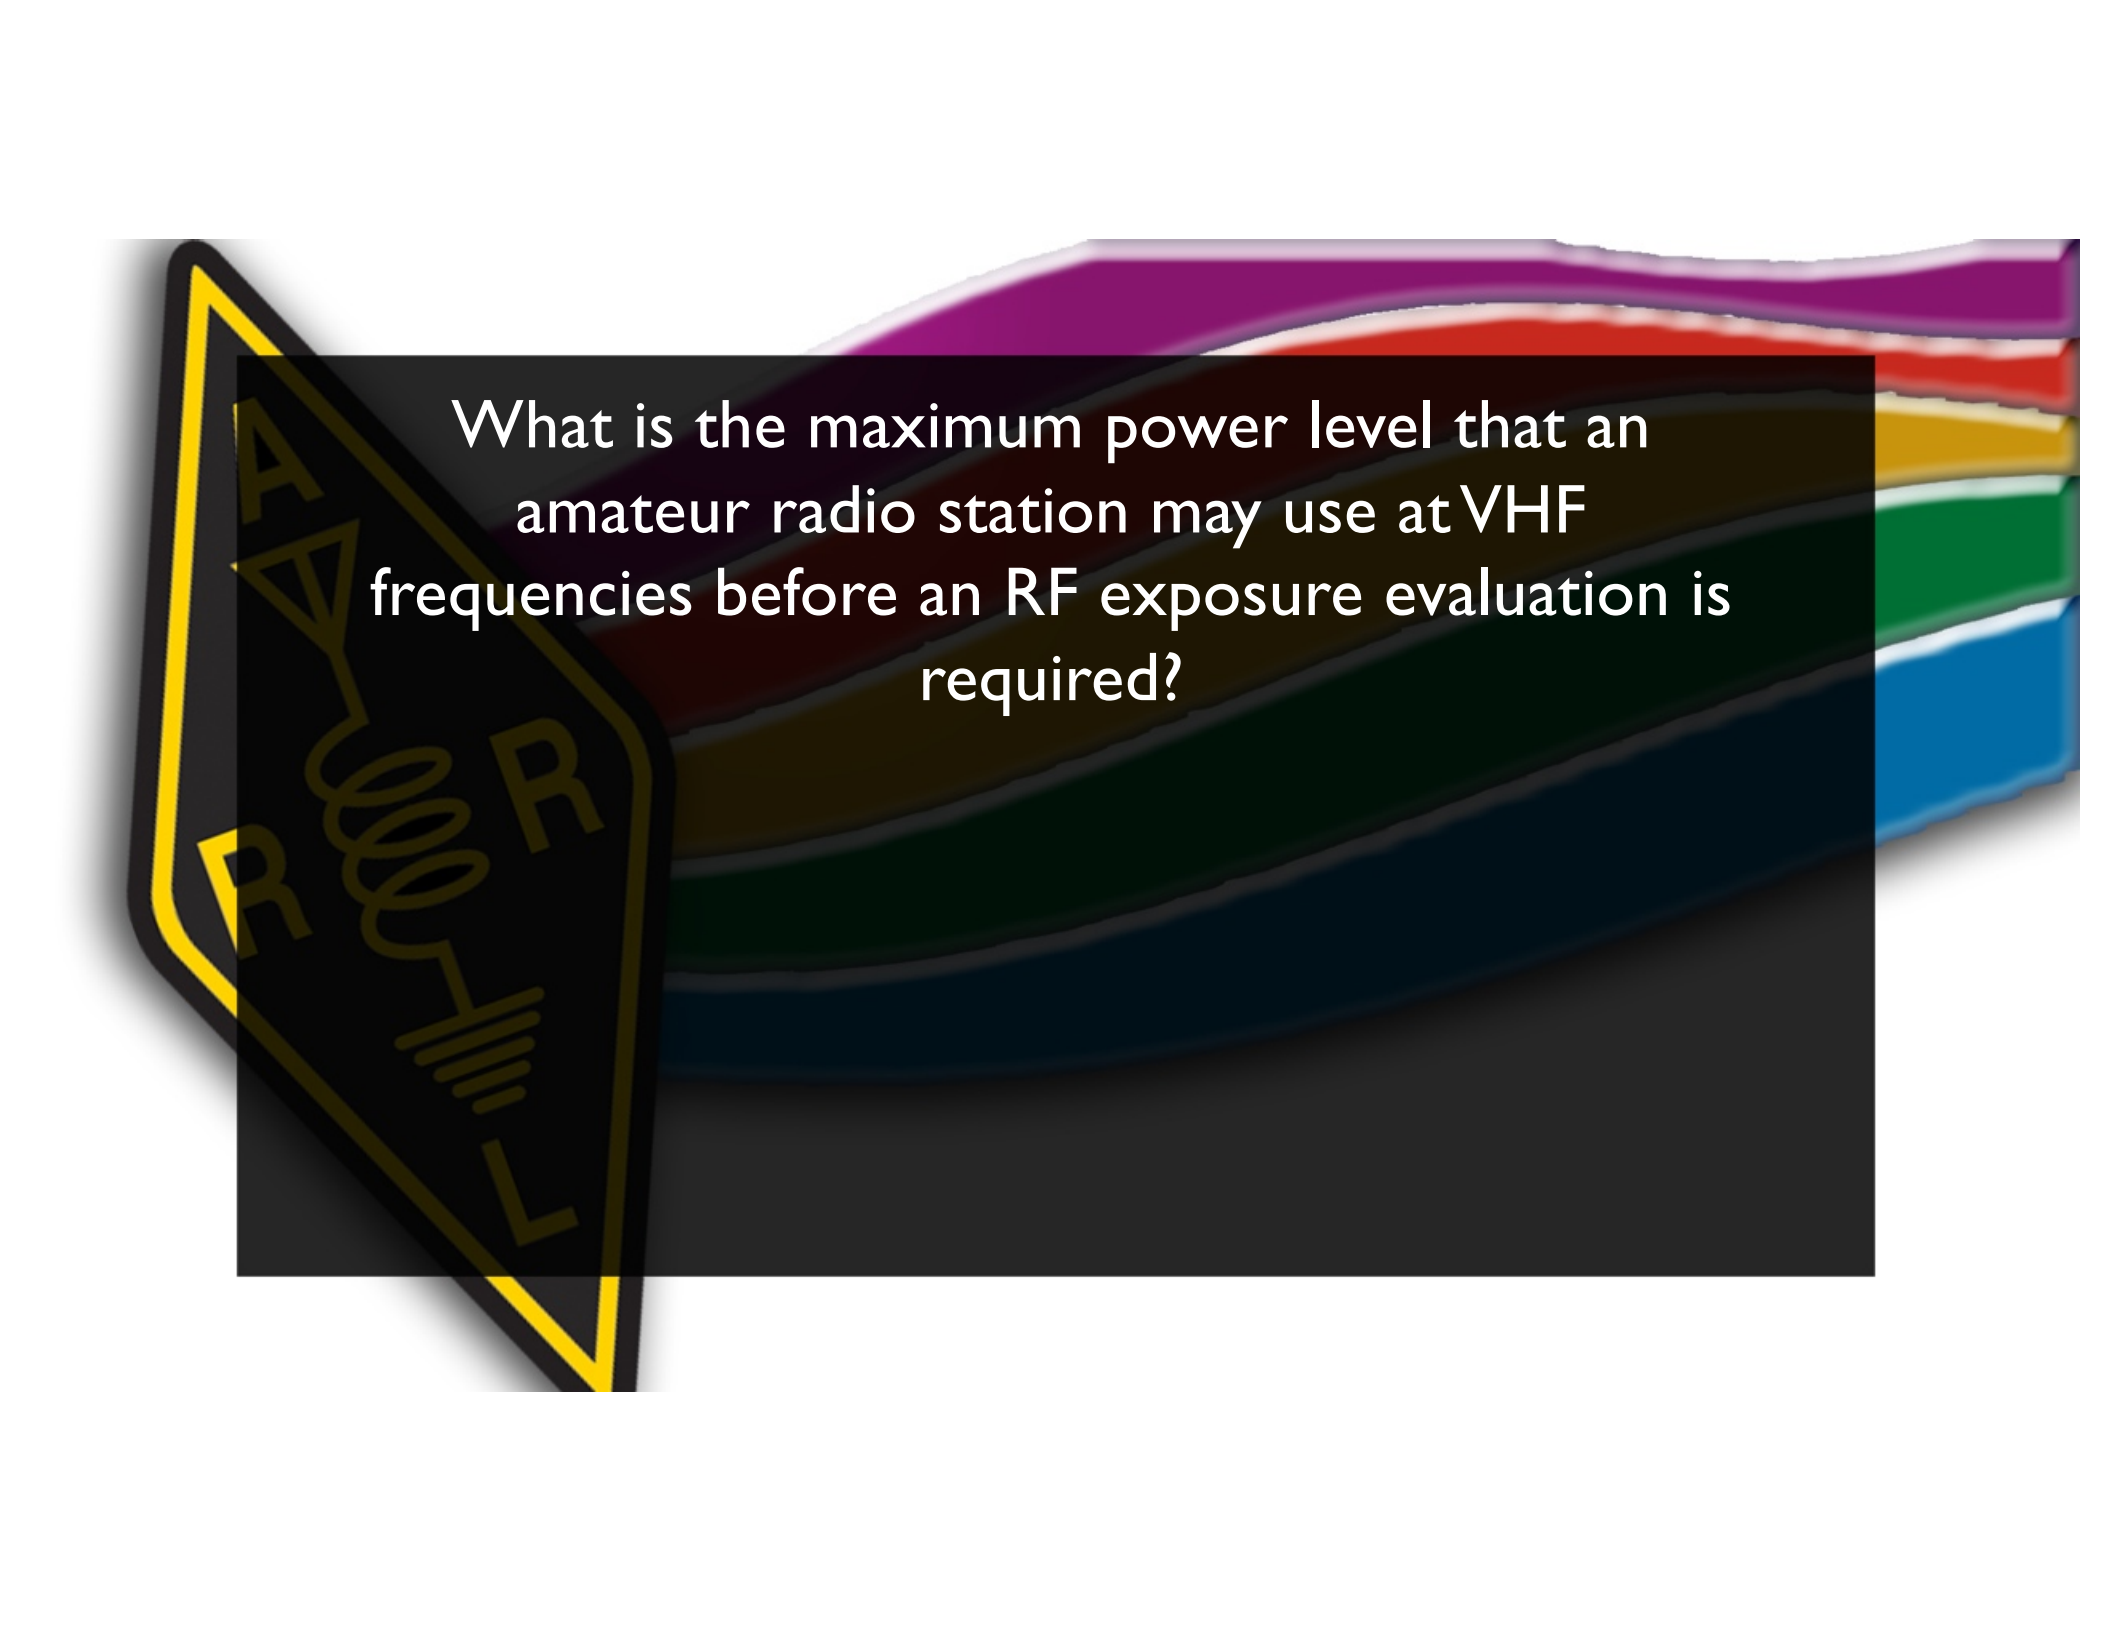

What is the maximum power level that an amateur radio station may use at VHF frequencies before an RF exposure evaluation is required?

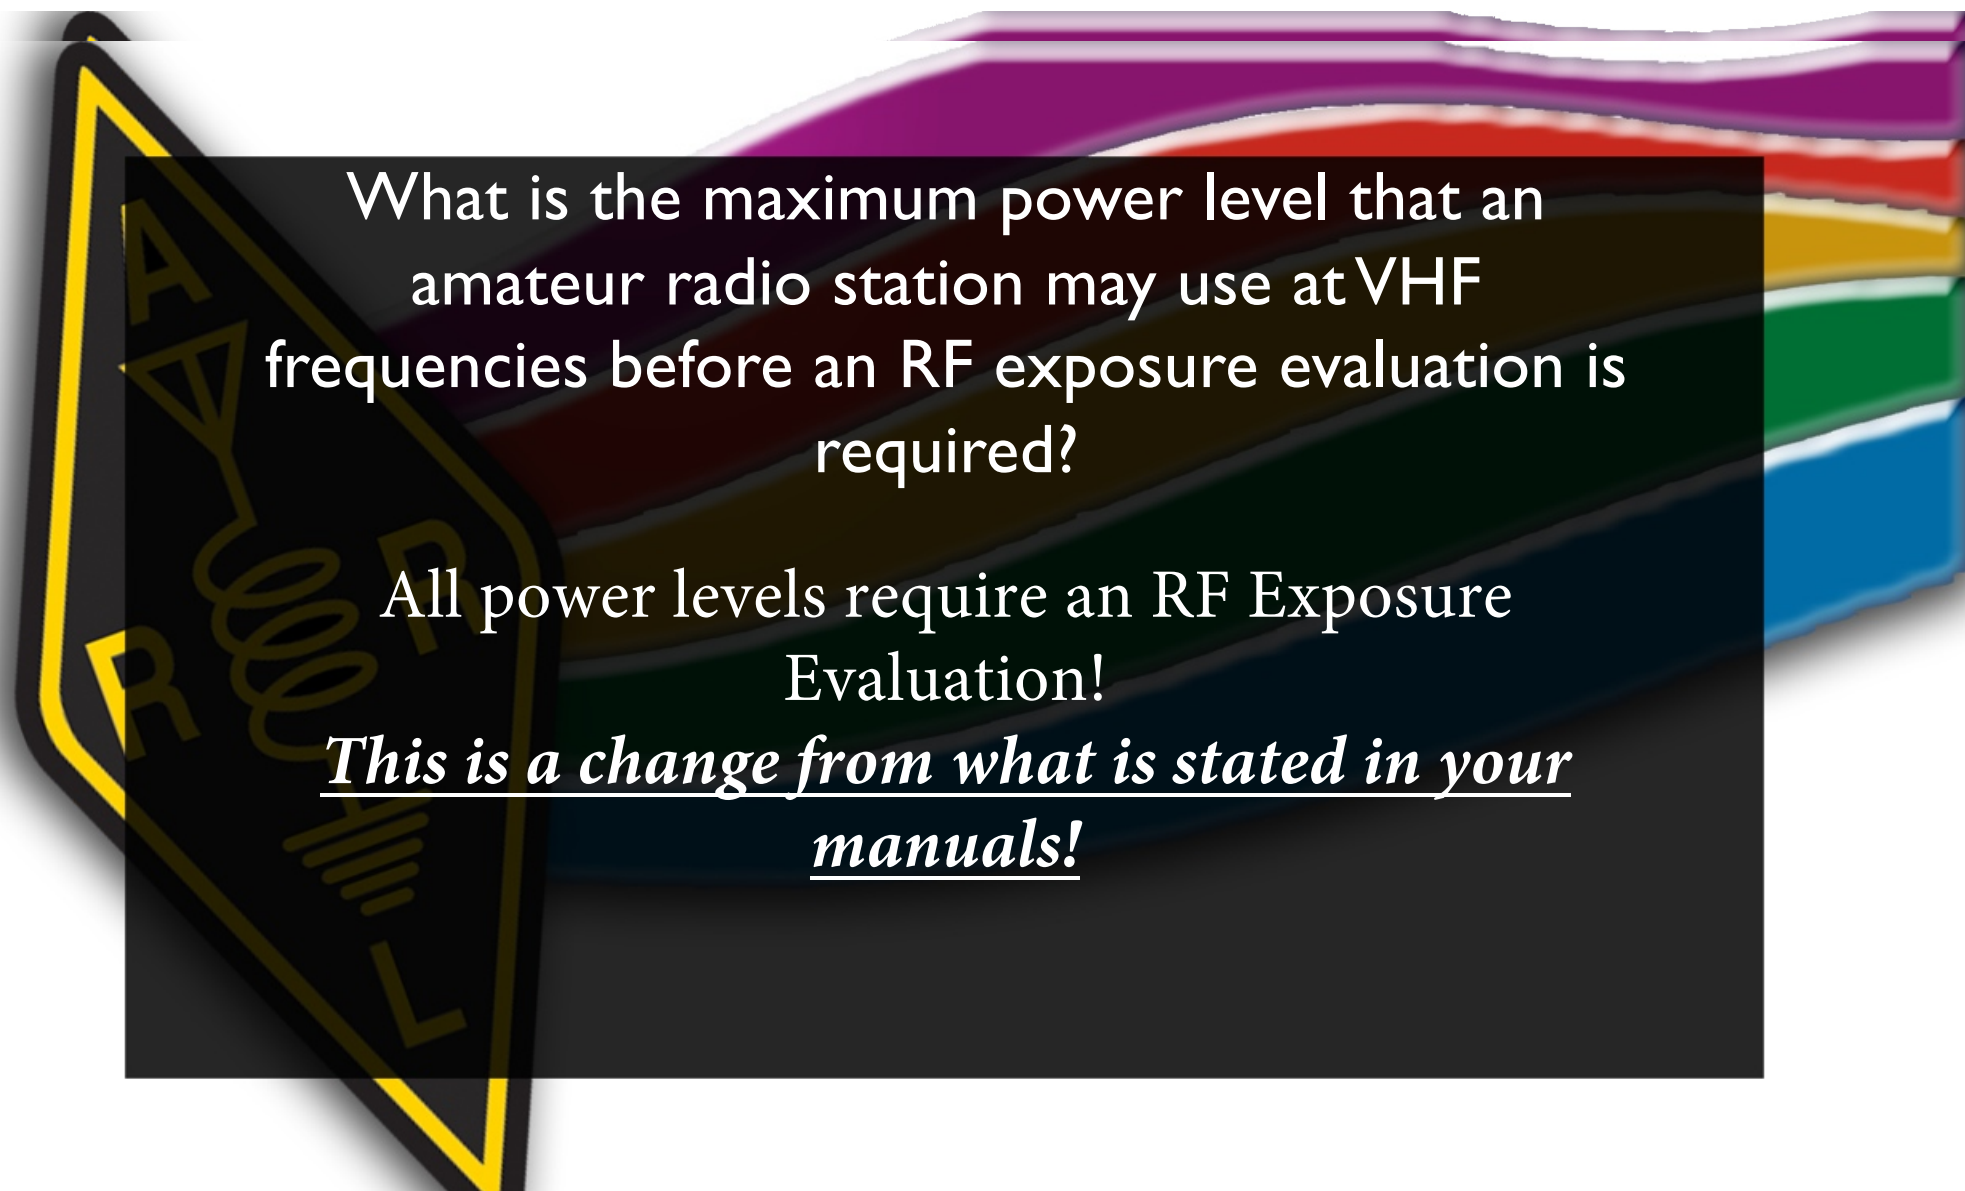

What is the maximum power level that an amateur radio station may use at VHF frequencies before an RF exposure evaluation is required?

All power levels require an RF Exposure Evaluation!

This is a change from what is stated in your manuals!



What factors affect the RF exposure of people near an amateur station antenna?



What factors affect the RF exposure of people near an amateur station antenna?

Frequency and power level of the RF field

Distance from the antenna to a person

Radiation pattern of the antenna




Why do exposure limits vary with frequency?






Why do exposure limits vary with frequency?

The human body absorbs more RF energy at some frequencies than at others

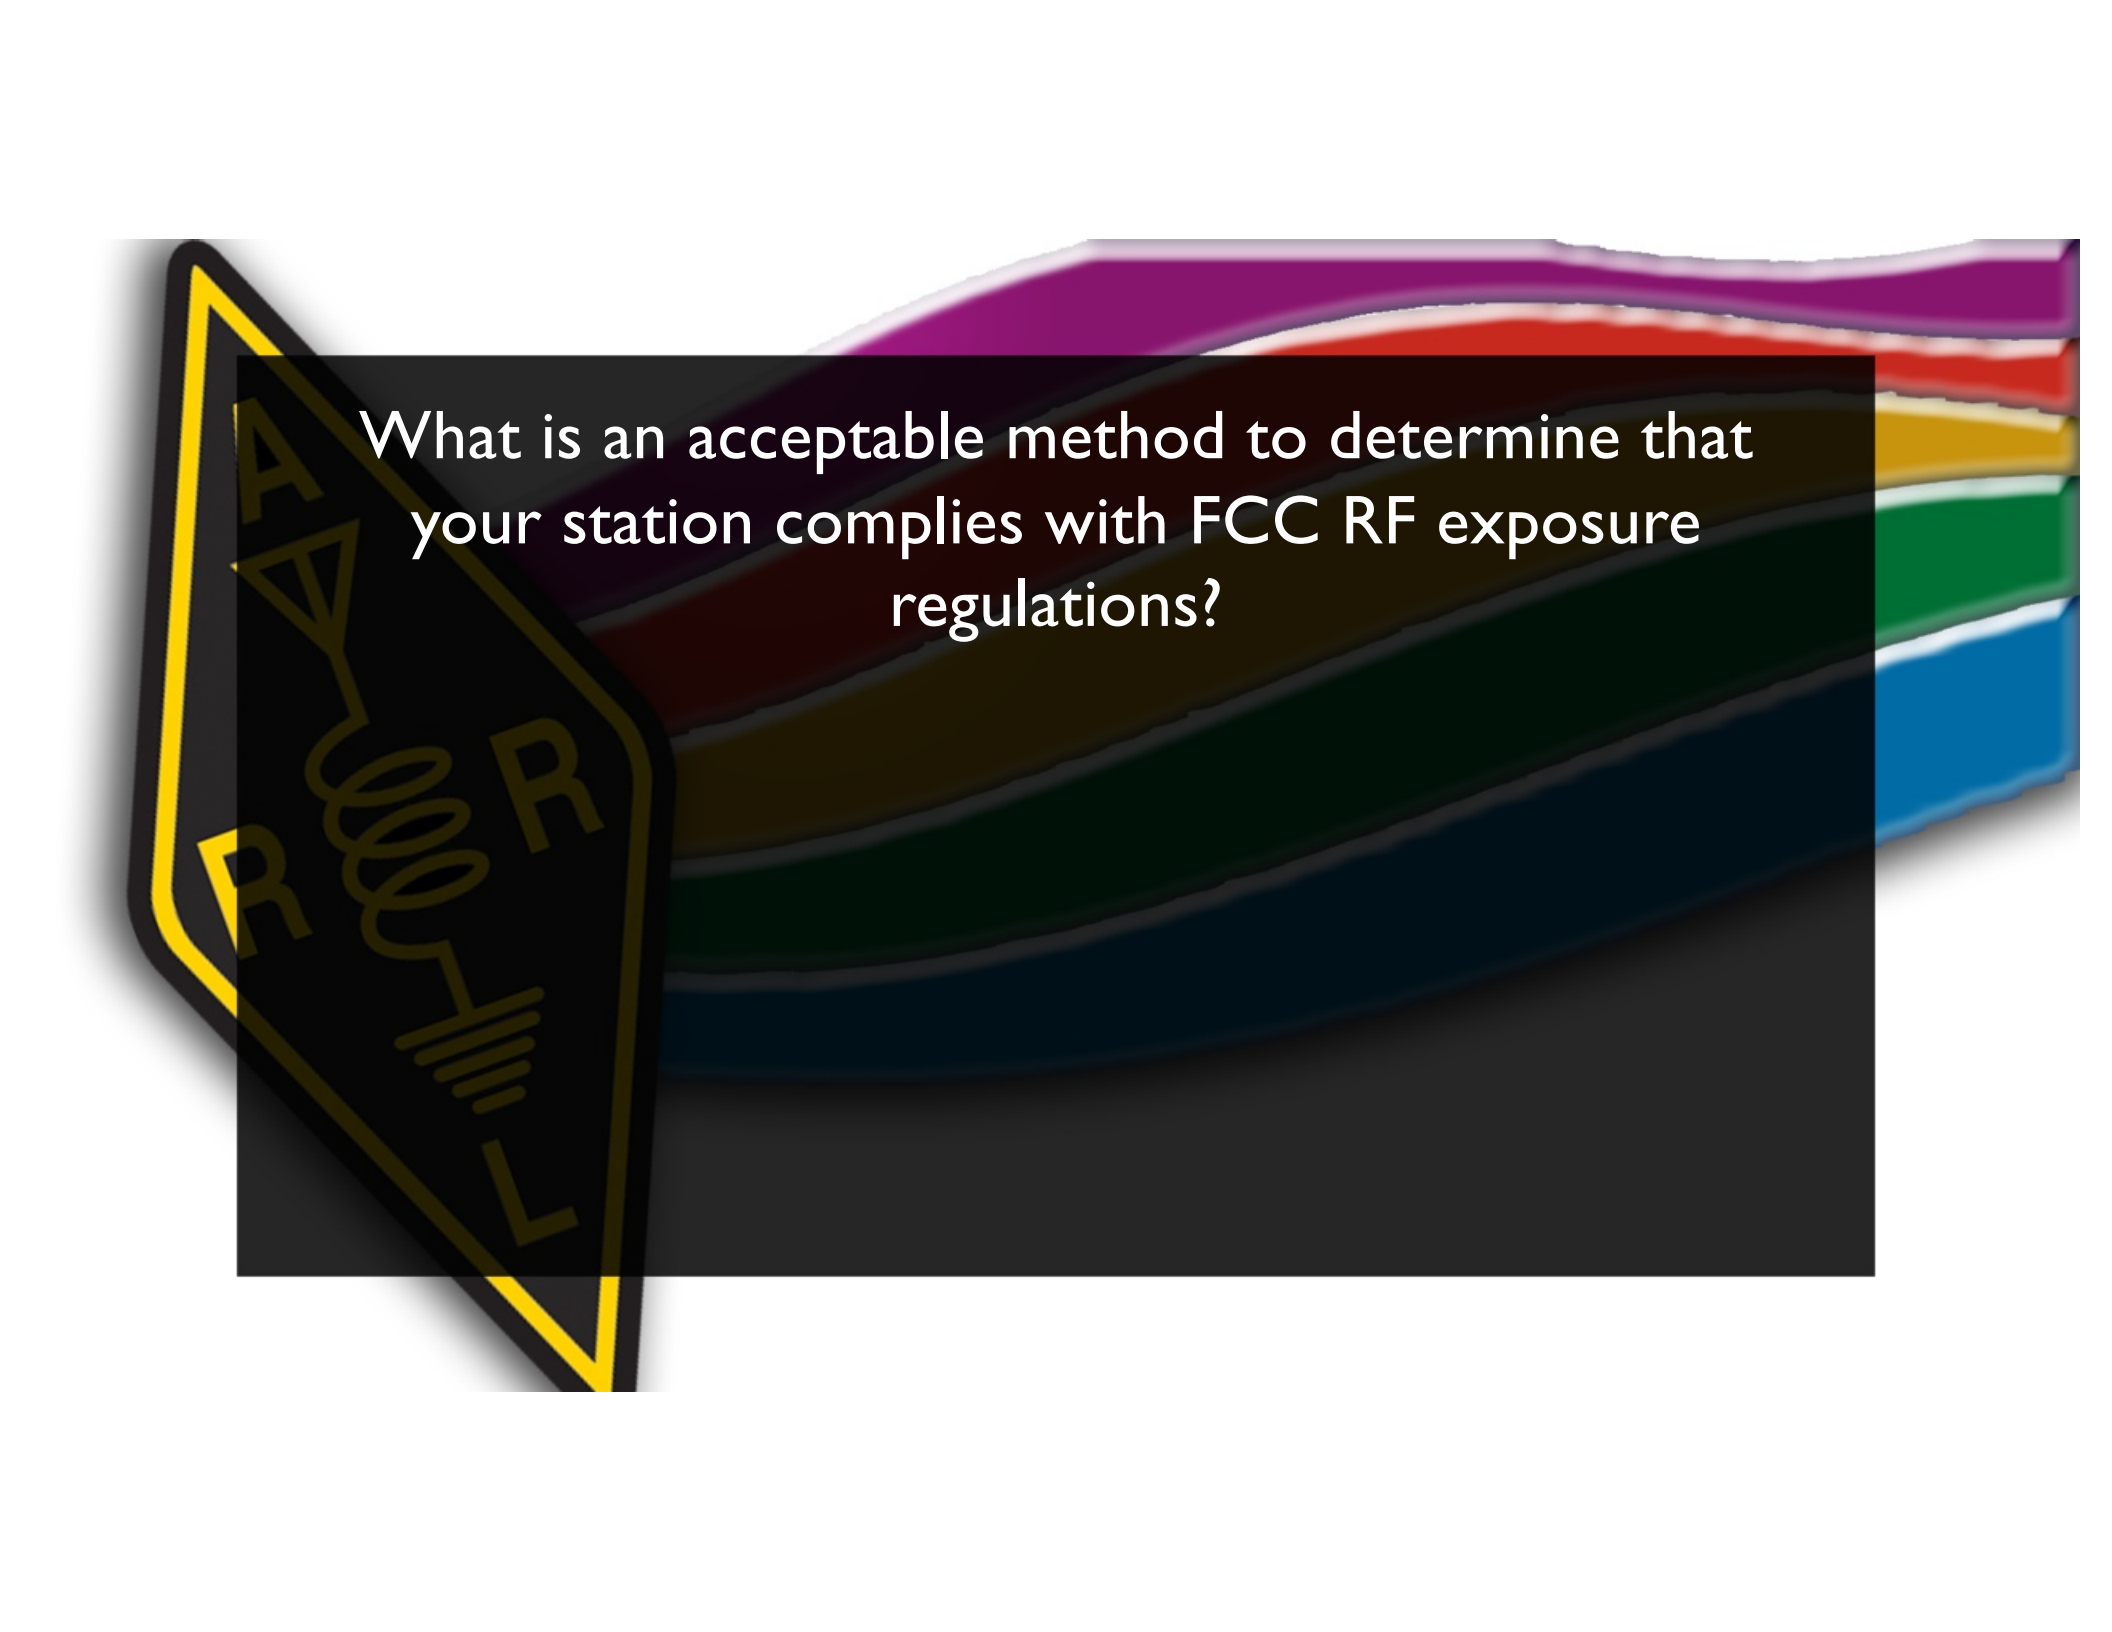

What is an acceptable method to determine that your station complies with FCC RF exposure regulations?

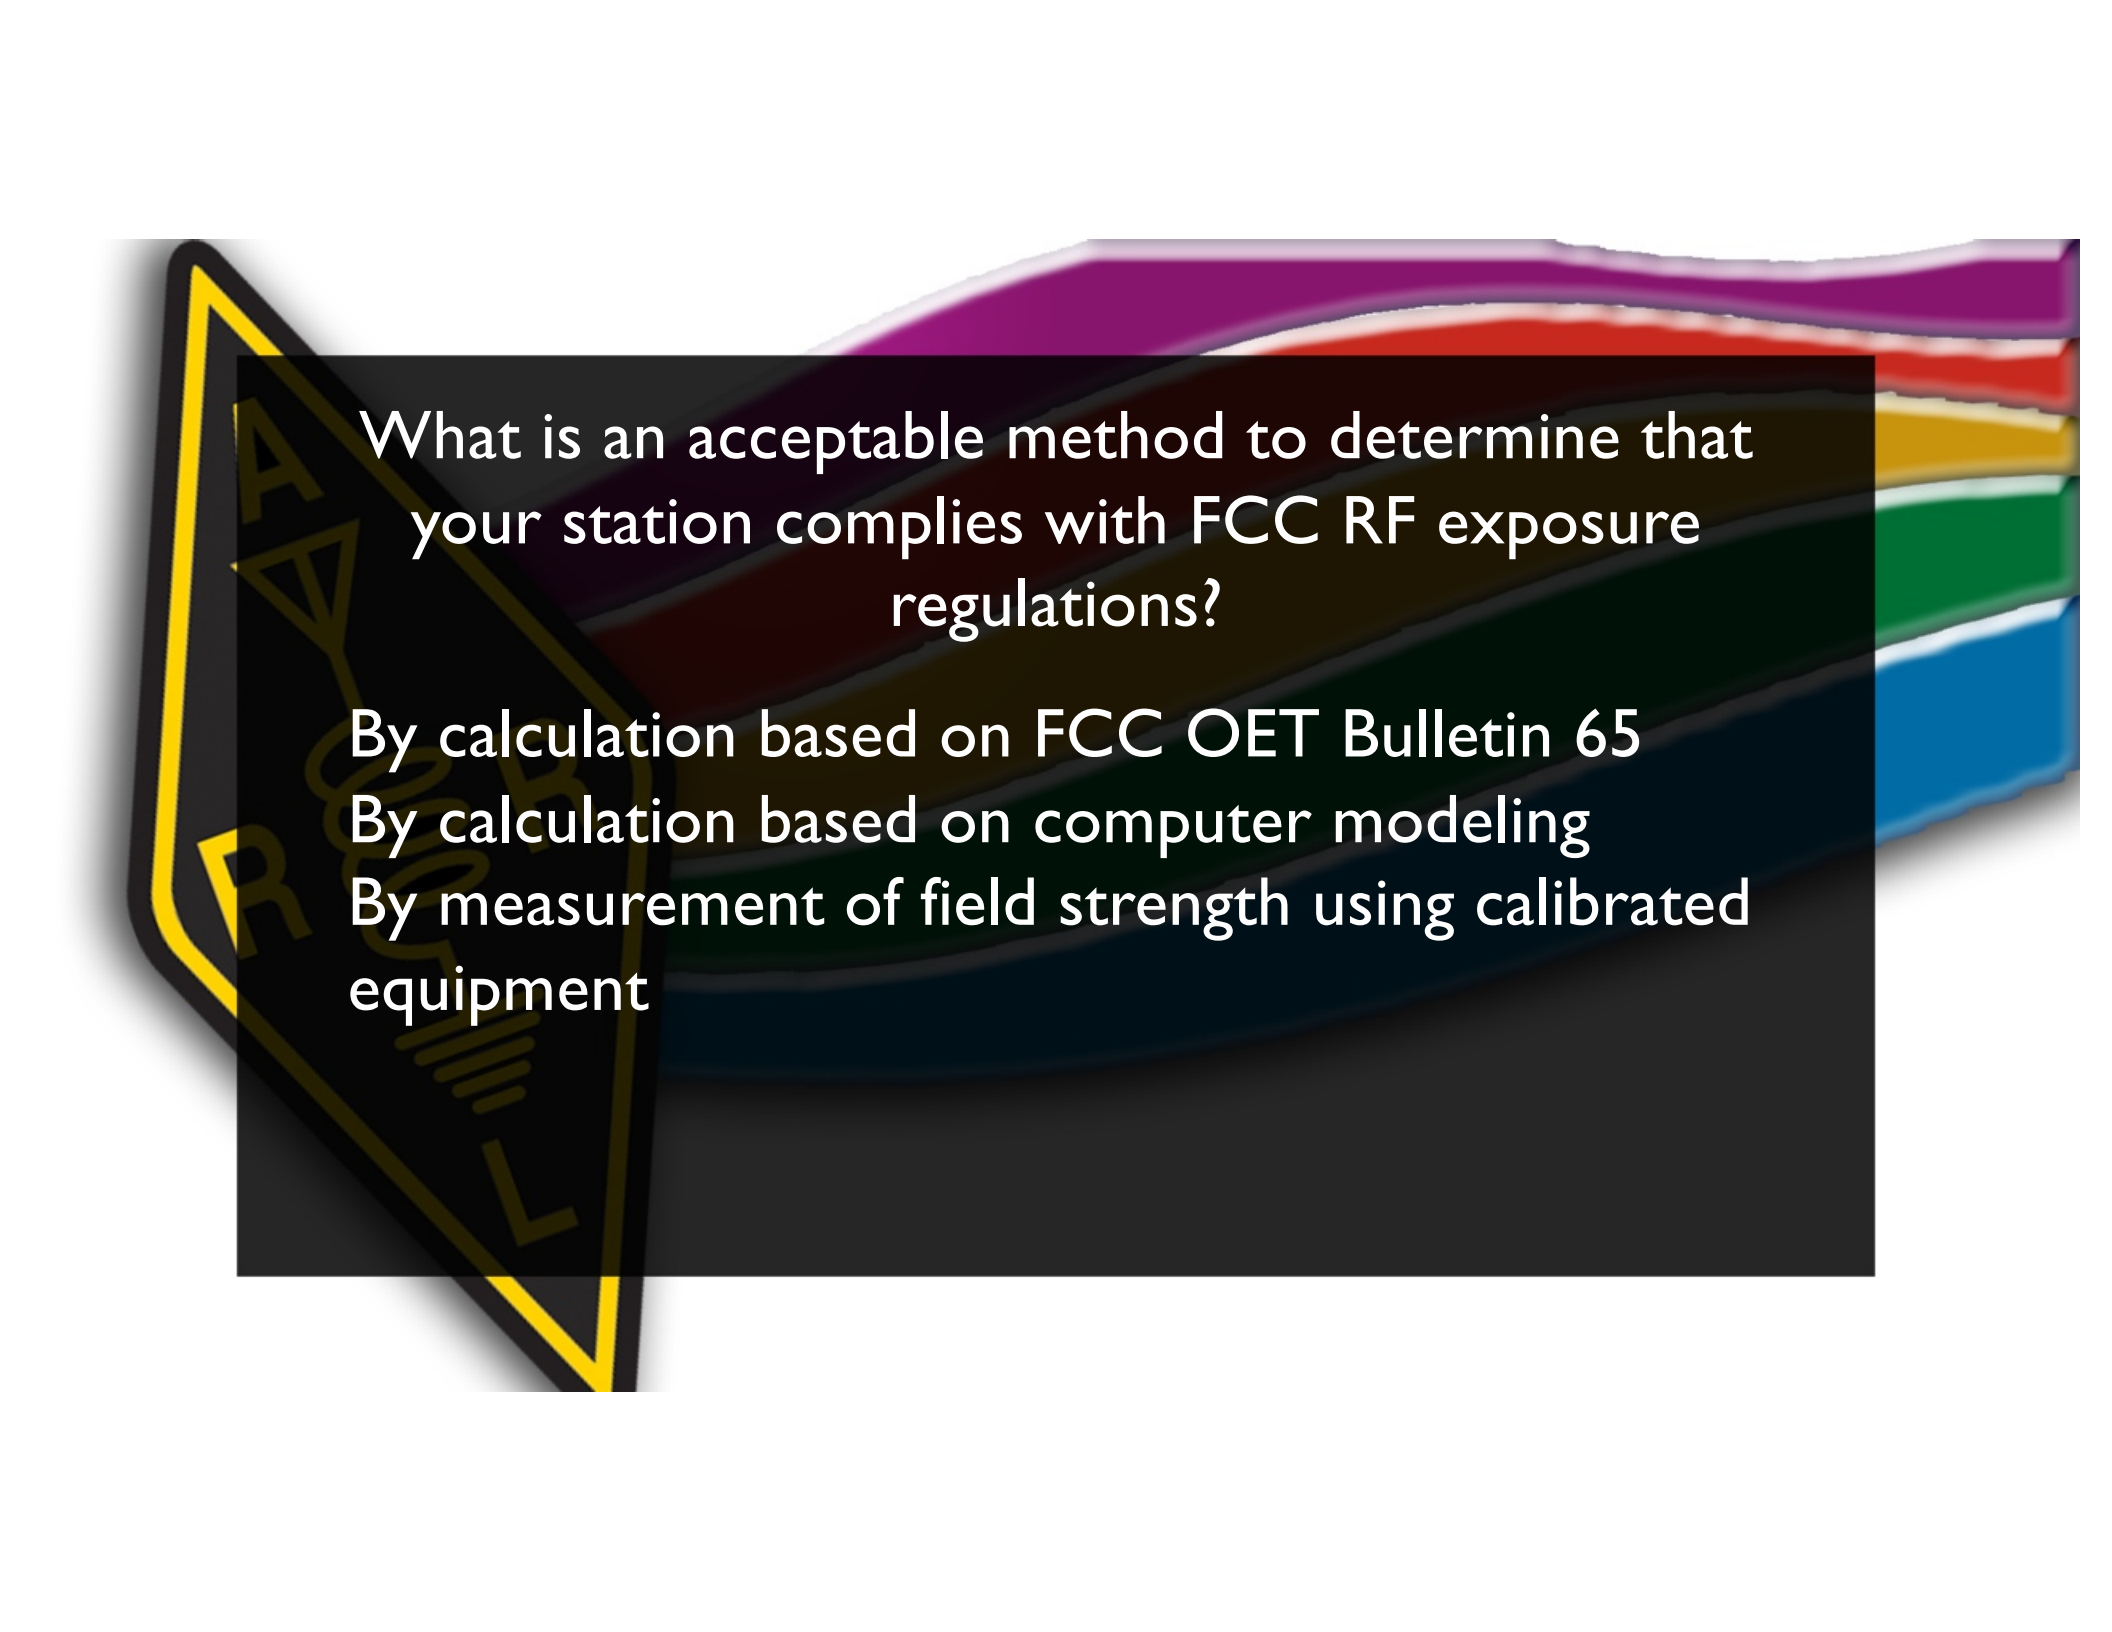


What is an acceptable method to determine that your station complies with FCC RF exposure regulations?

By calculation based on FCC OET Bulletin 65


By calculation based on computer modeling

By measurement of field strength using calibrated equipment

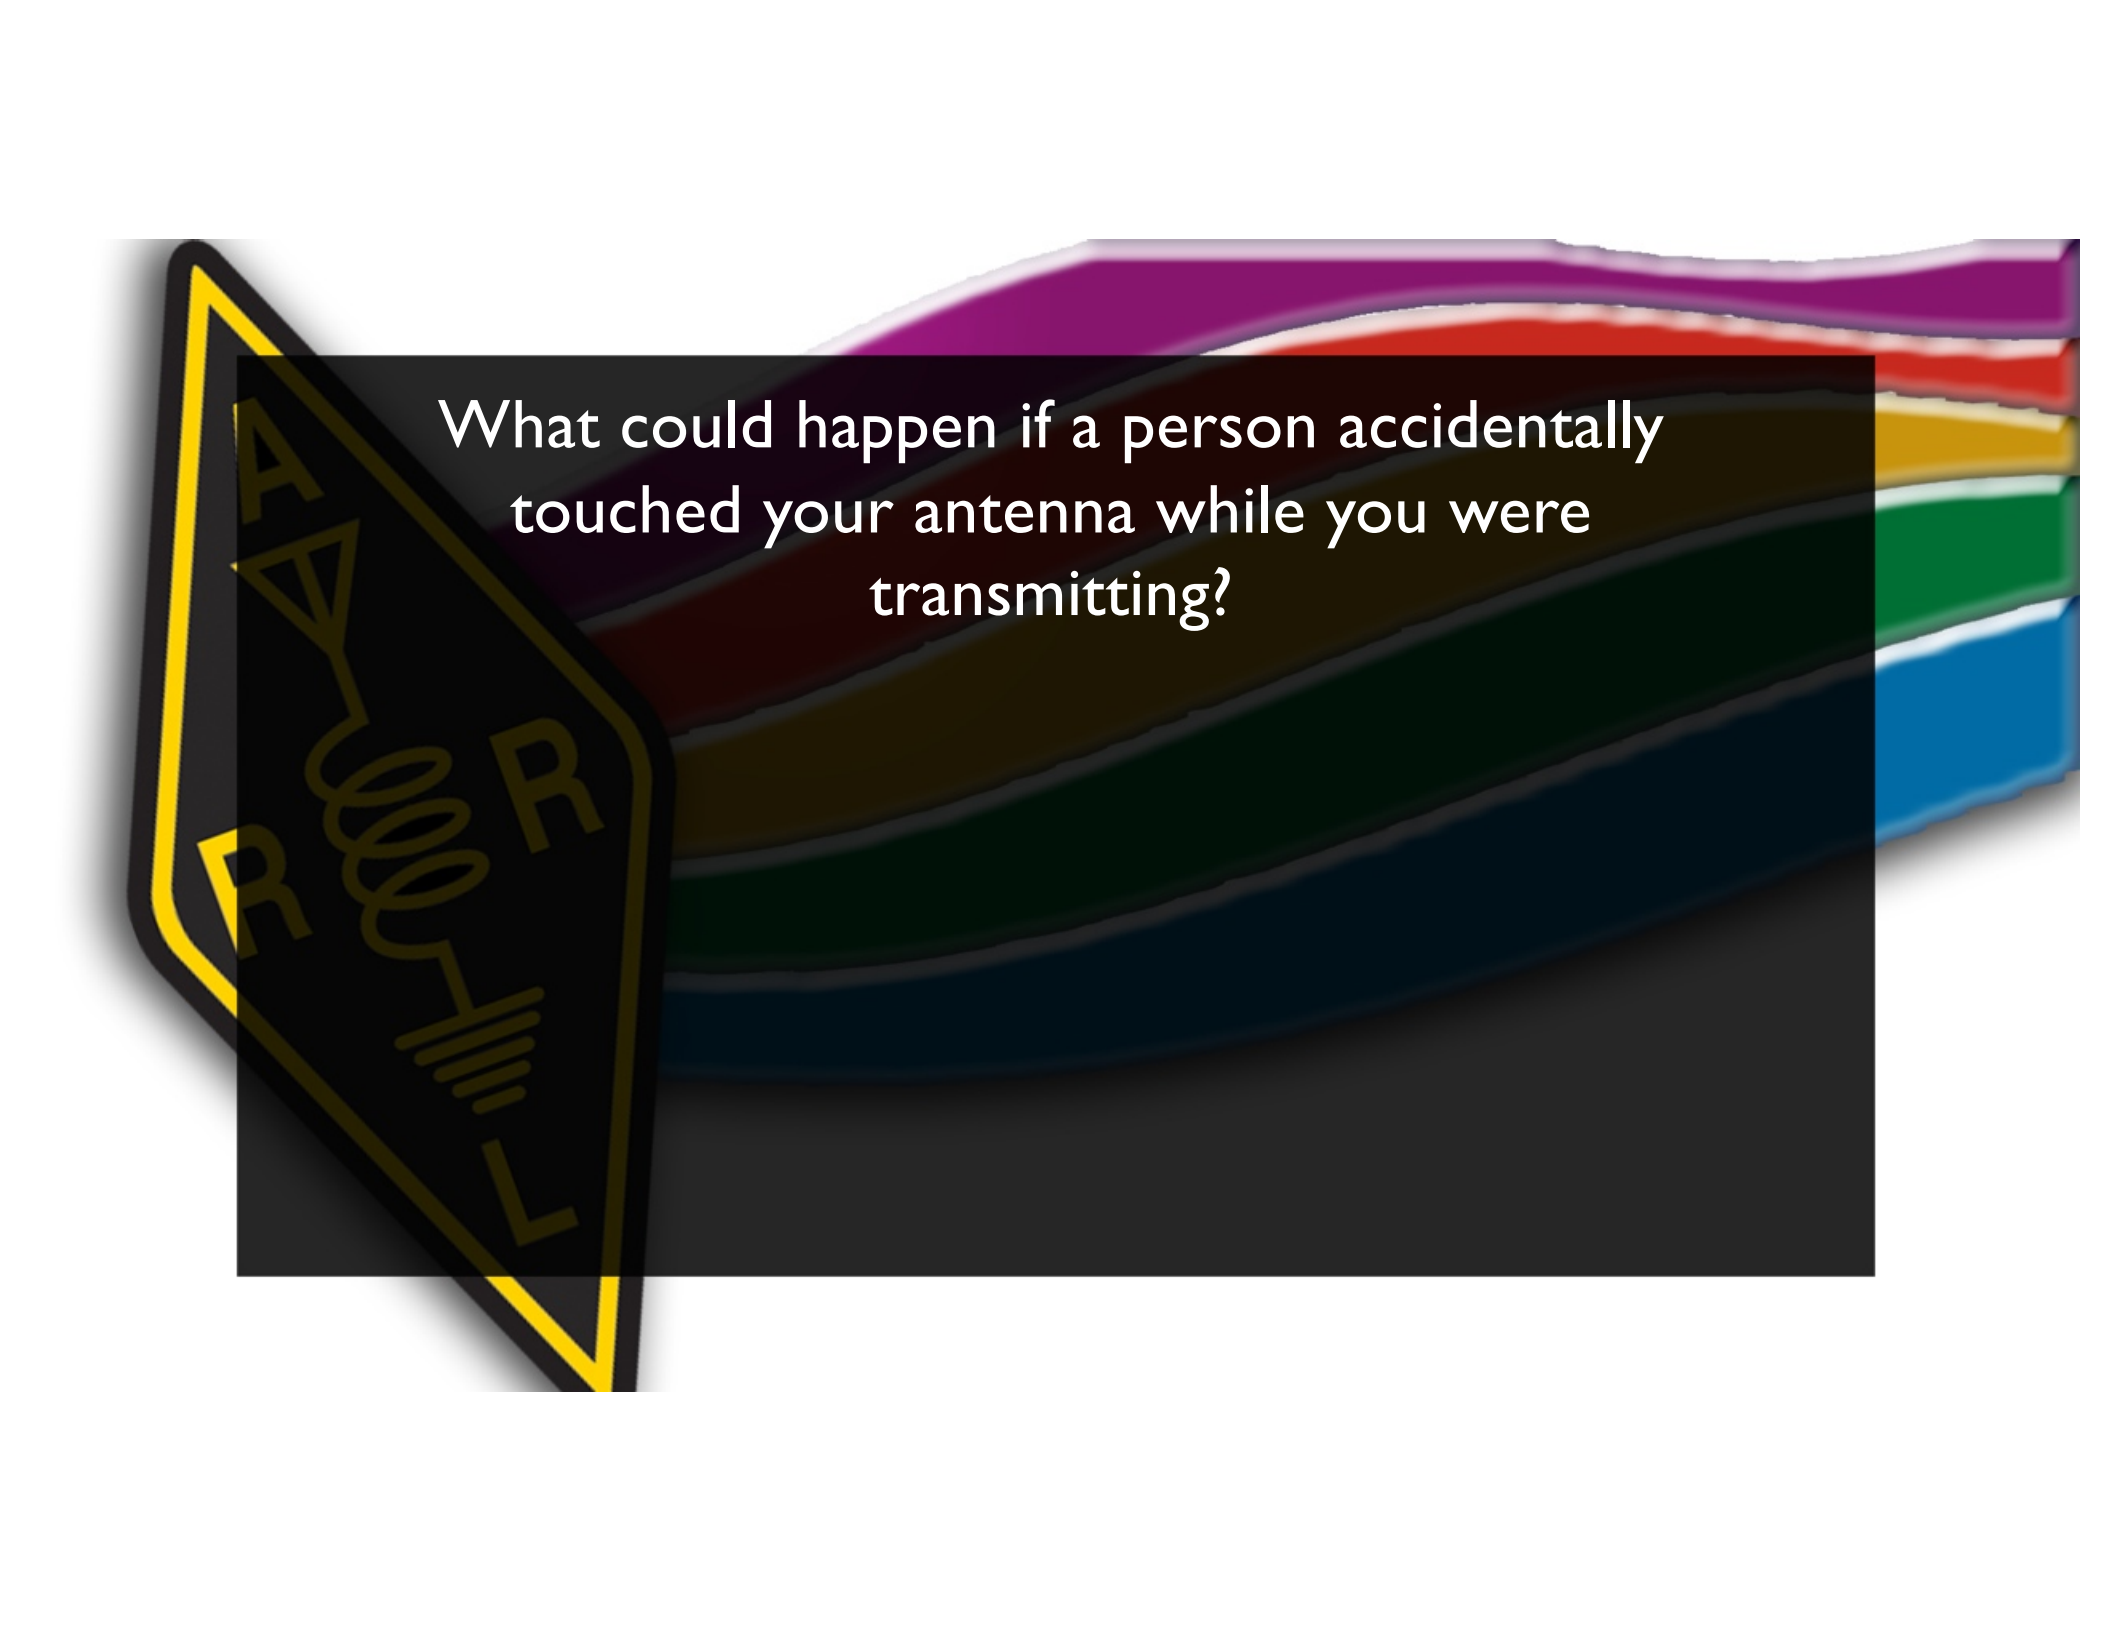

What could happen if a person accidentally touched your antenna while you were transmitting?



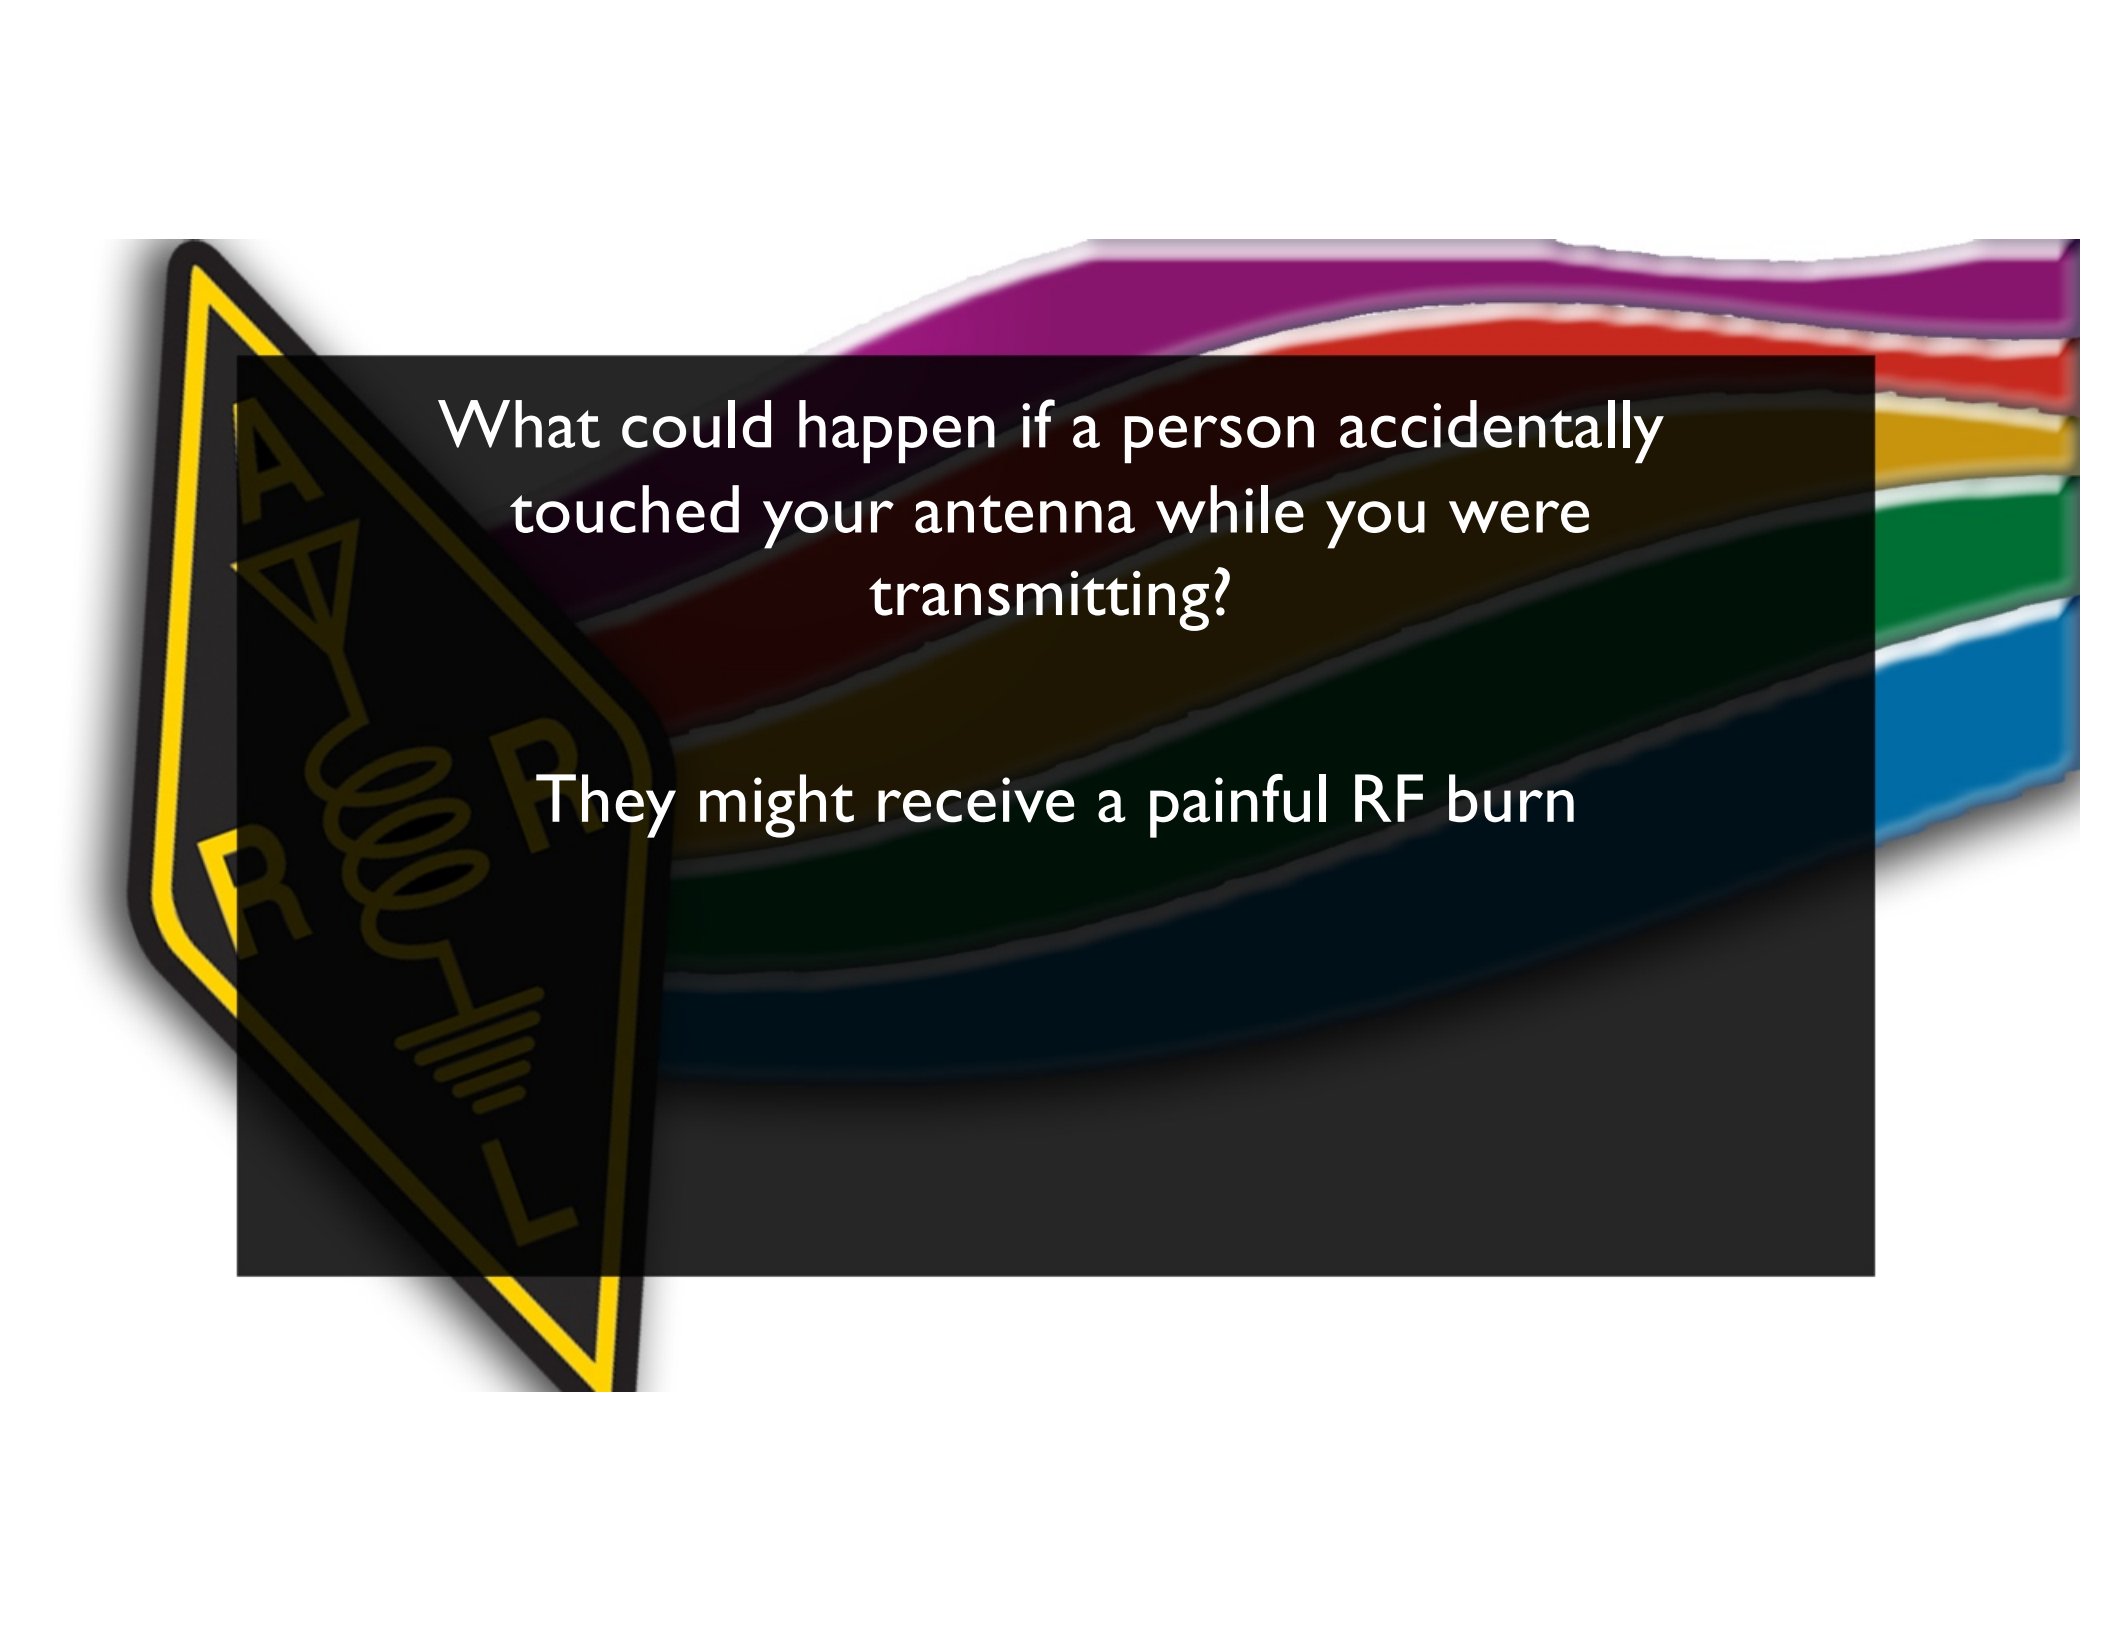

What could happen if a person accidentally touched your antenna while you were transmitting?

They might receive a painful RF burn



What actions might amateur operators take to prevent exposure to RF radiation in excess of FCC-supplied limits?



What actions might amateur operators take to prevent exposure to RF radiation in excess of FCC-supplied limits?

Relocate antennas




How can you make sure your station stays in compliance with RF safety regulations?






How can you make sure your station stays in compliance with RF safety regulations?

By re-evaluating the station whenever an item of equipment is changed

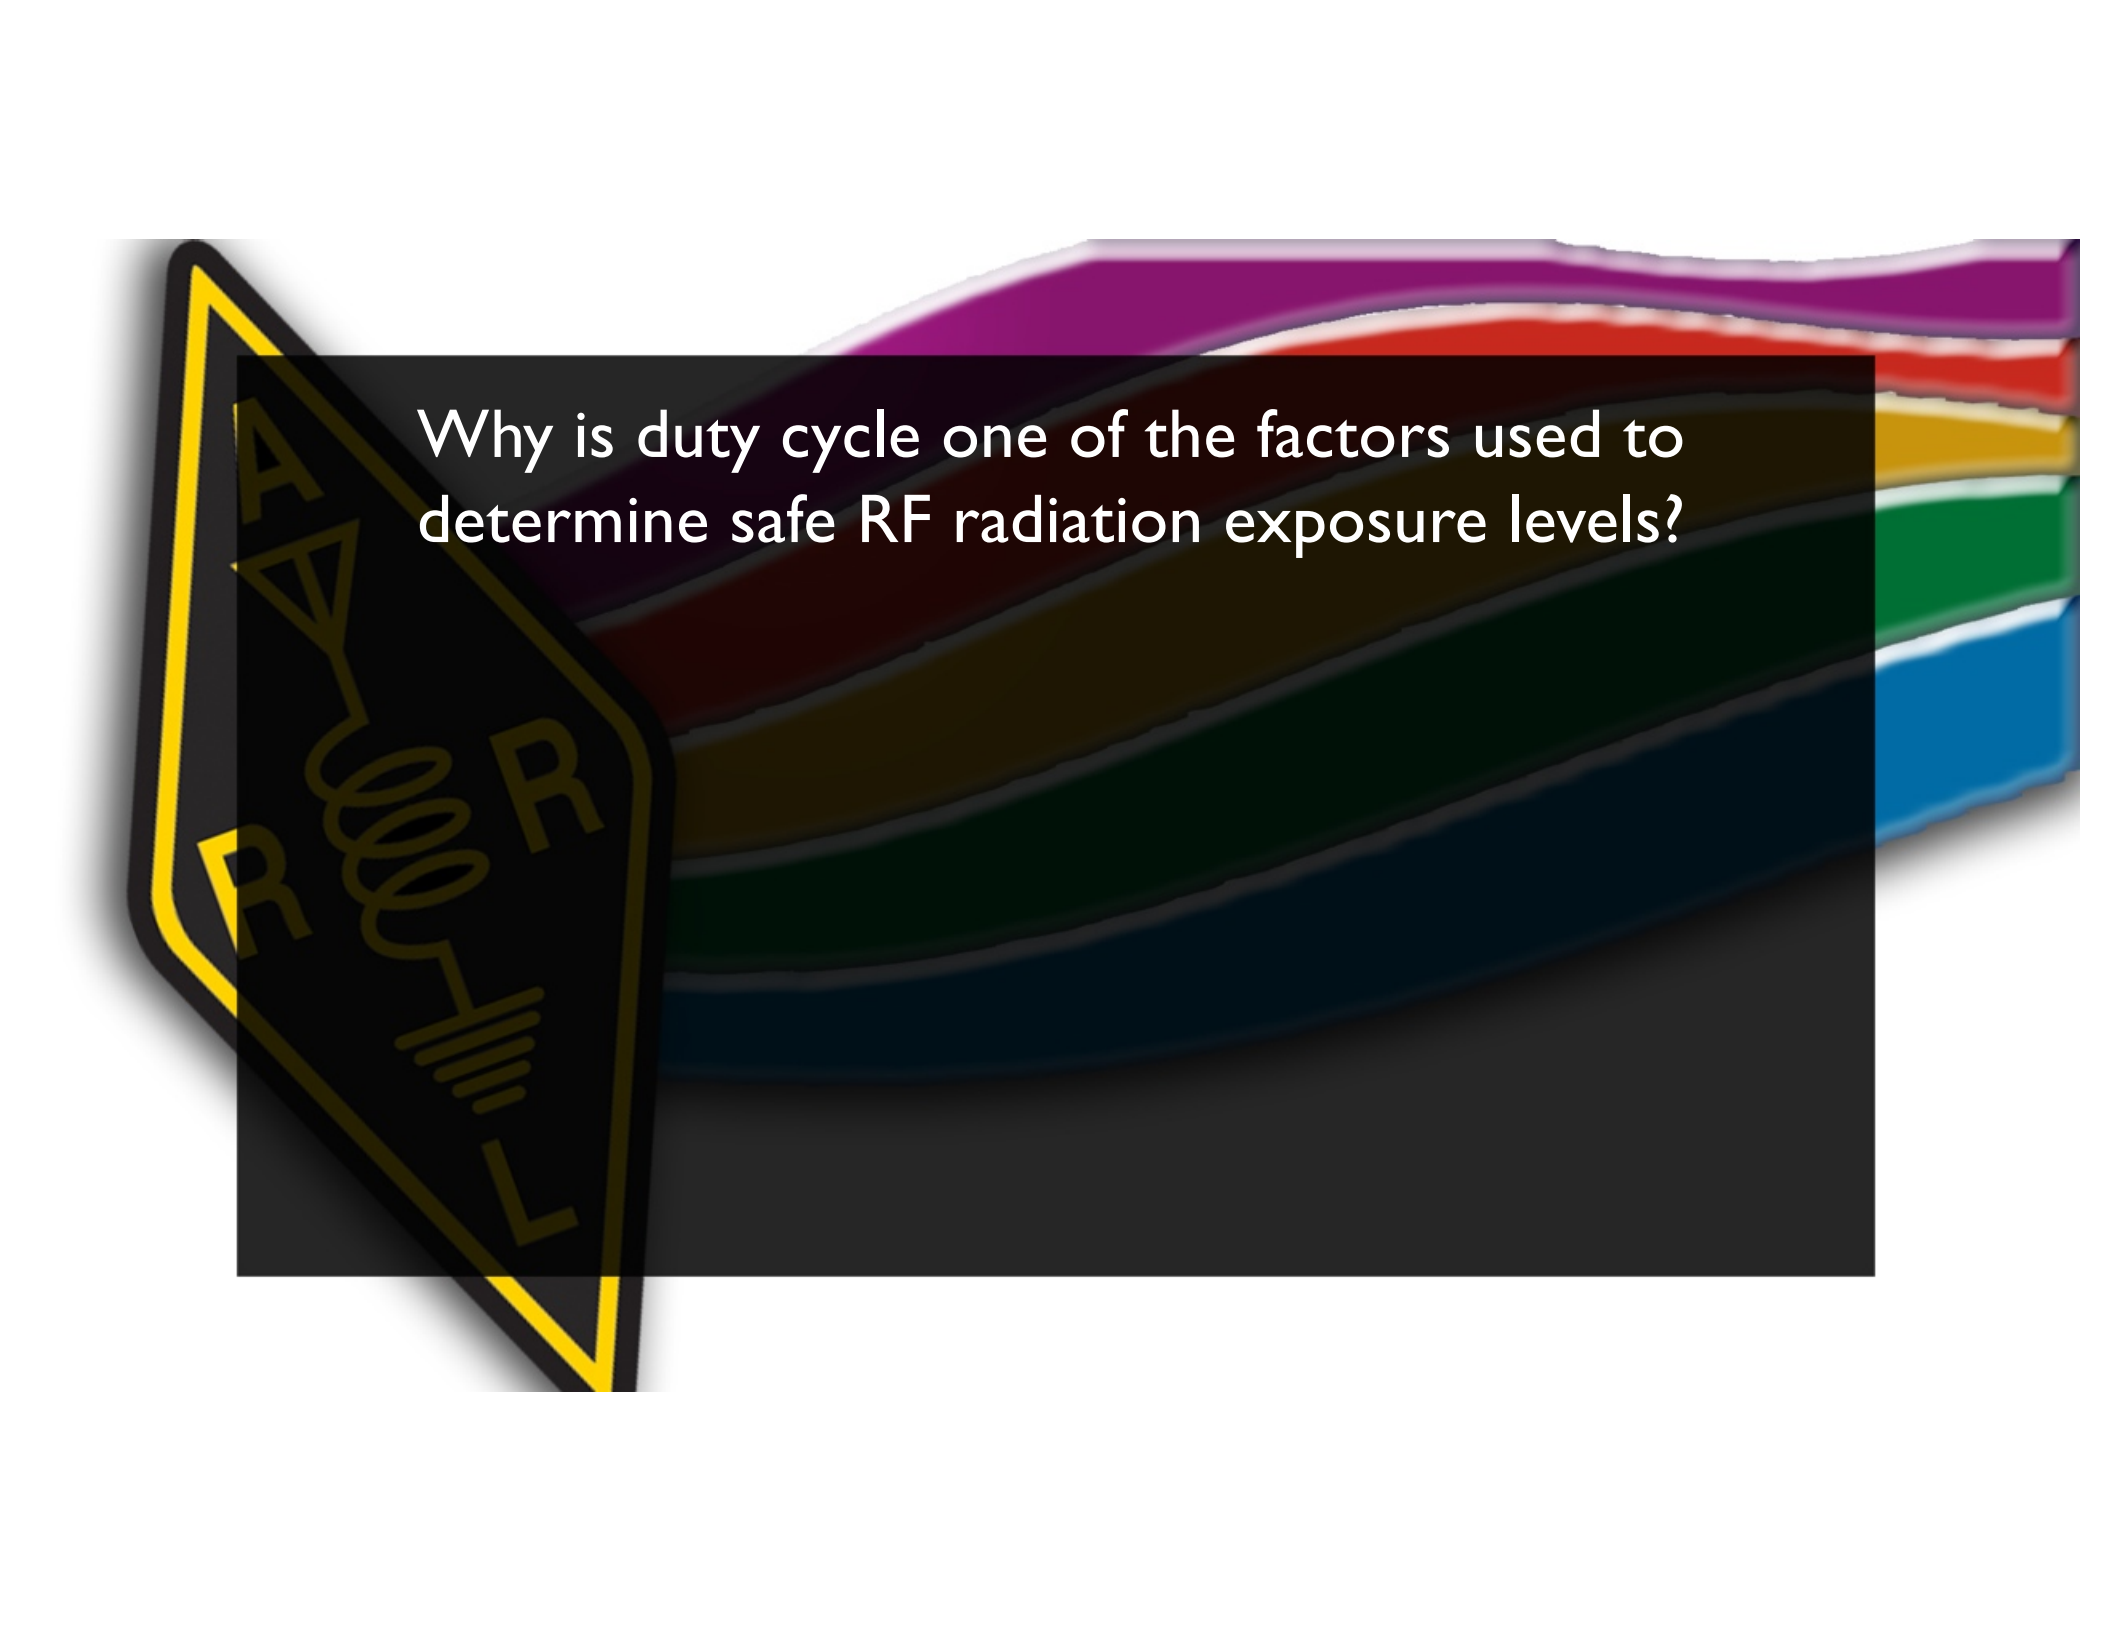


Why is duty cycle one of the factors used to determine safe RF radiation exposure levels?

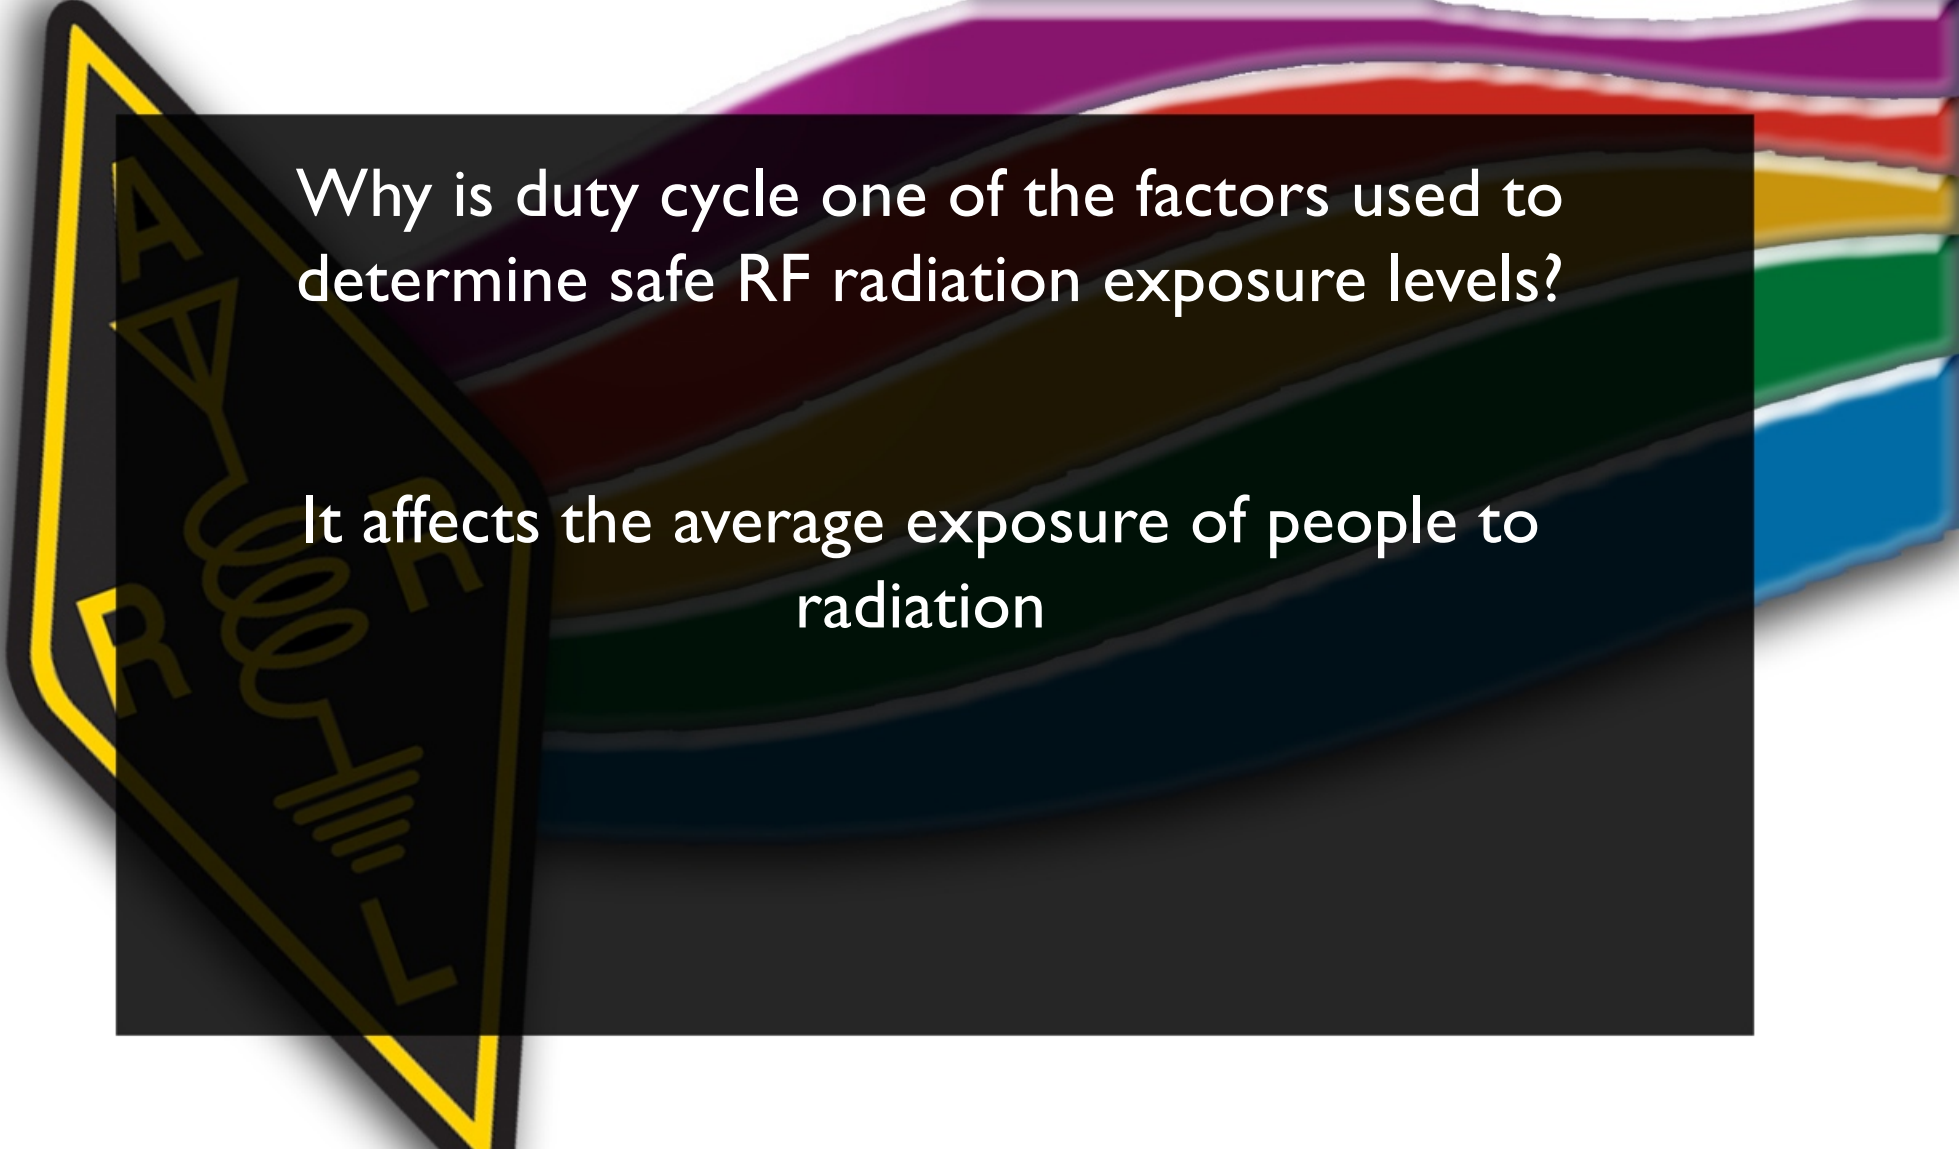


Why is duty cycle one of the factors used to determine safe RF radiation exposure levels?

It affects the average exposure of people to radiation

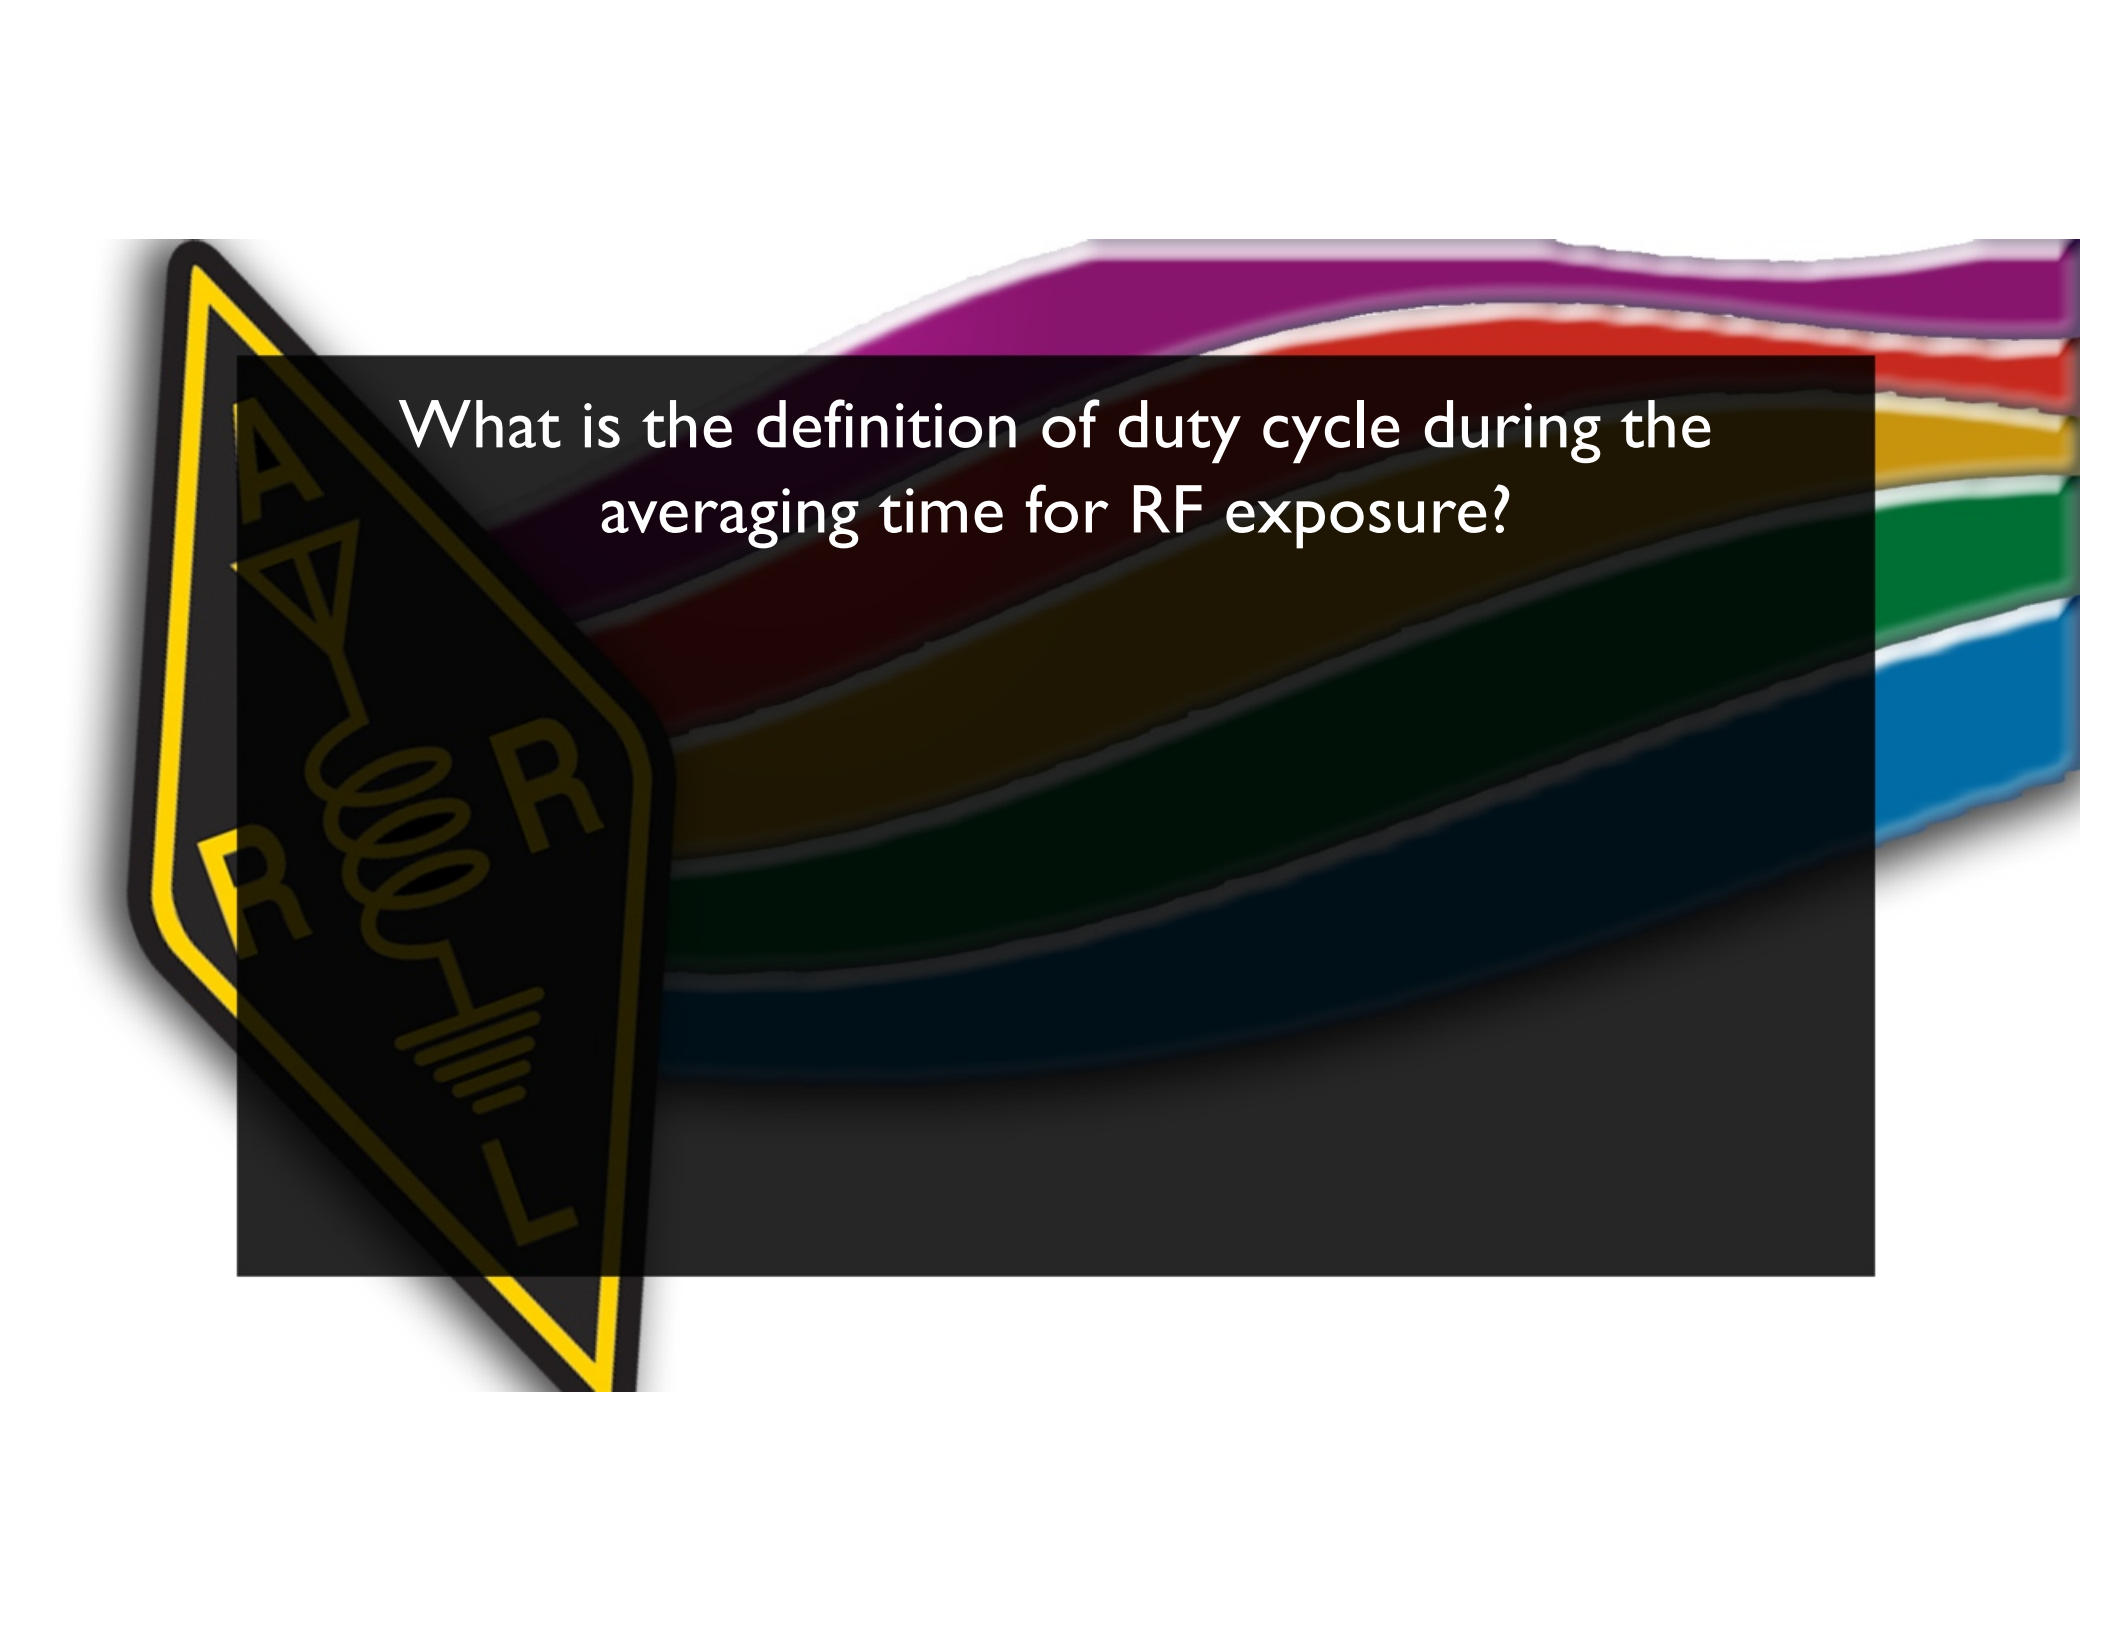


What is the definition of duty cycle during the averaging time for RF exposure?



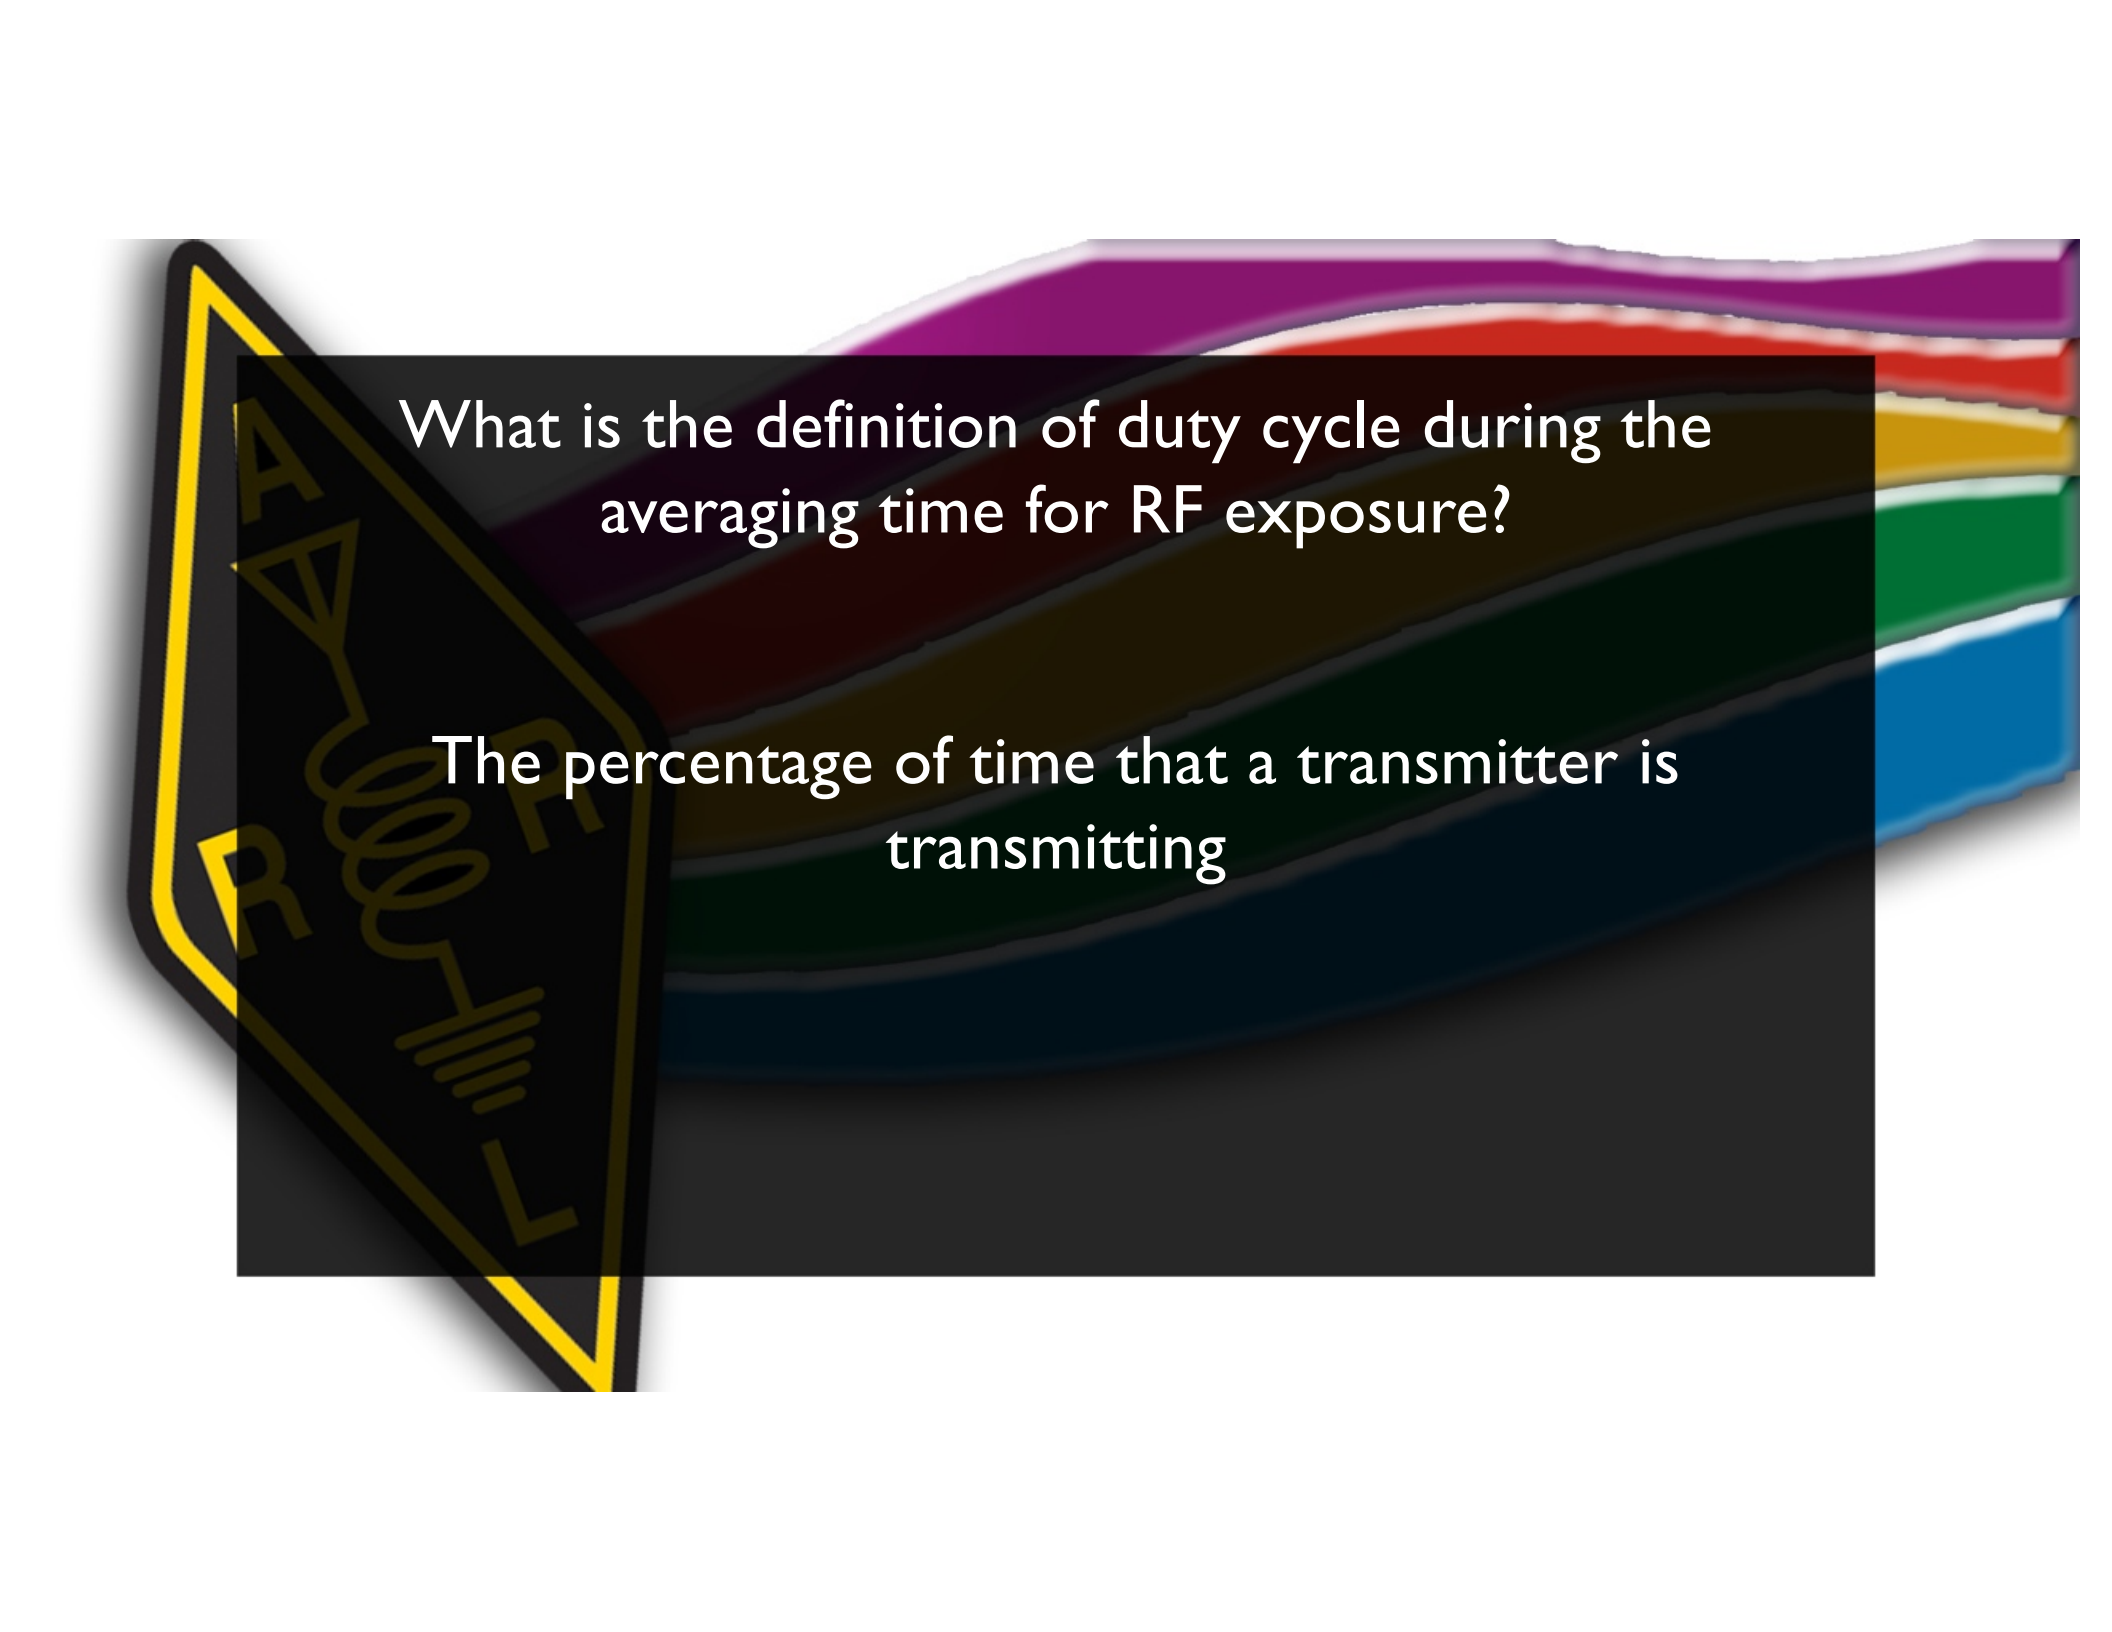


What is the definition of duty cycle during the averaging time for RF exposure?

The percentage of time that a transmitter is transmitting

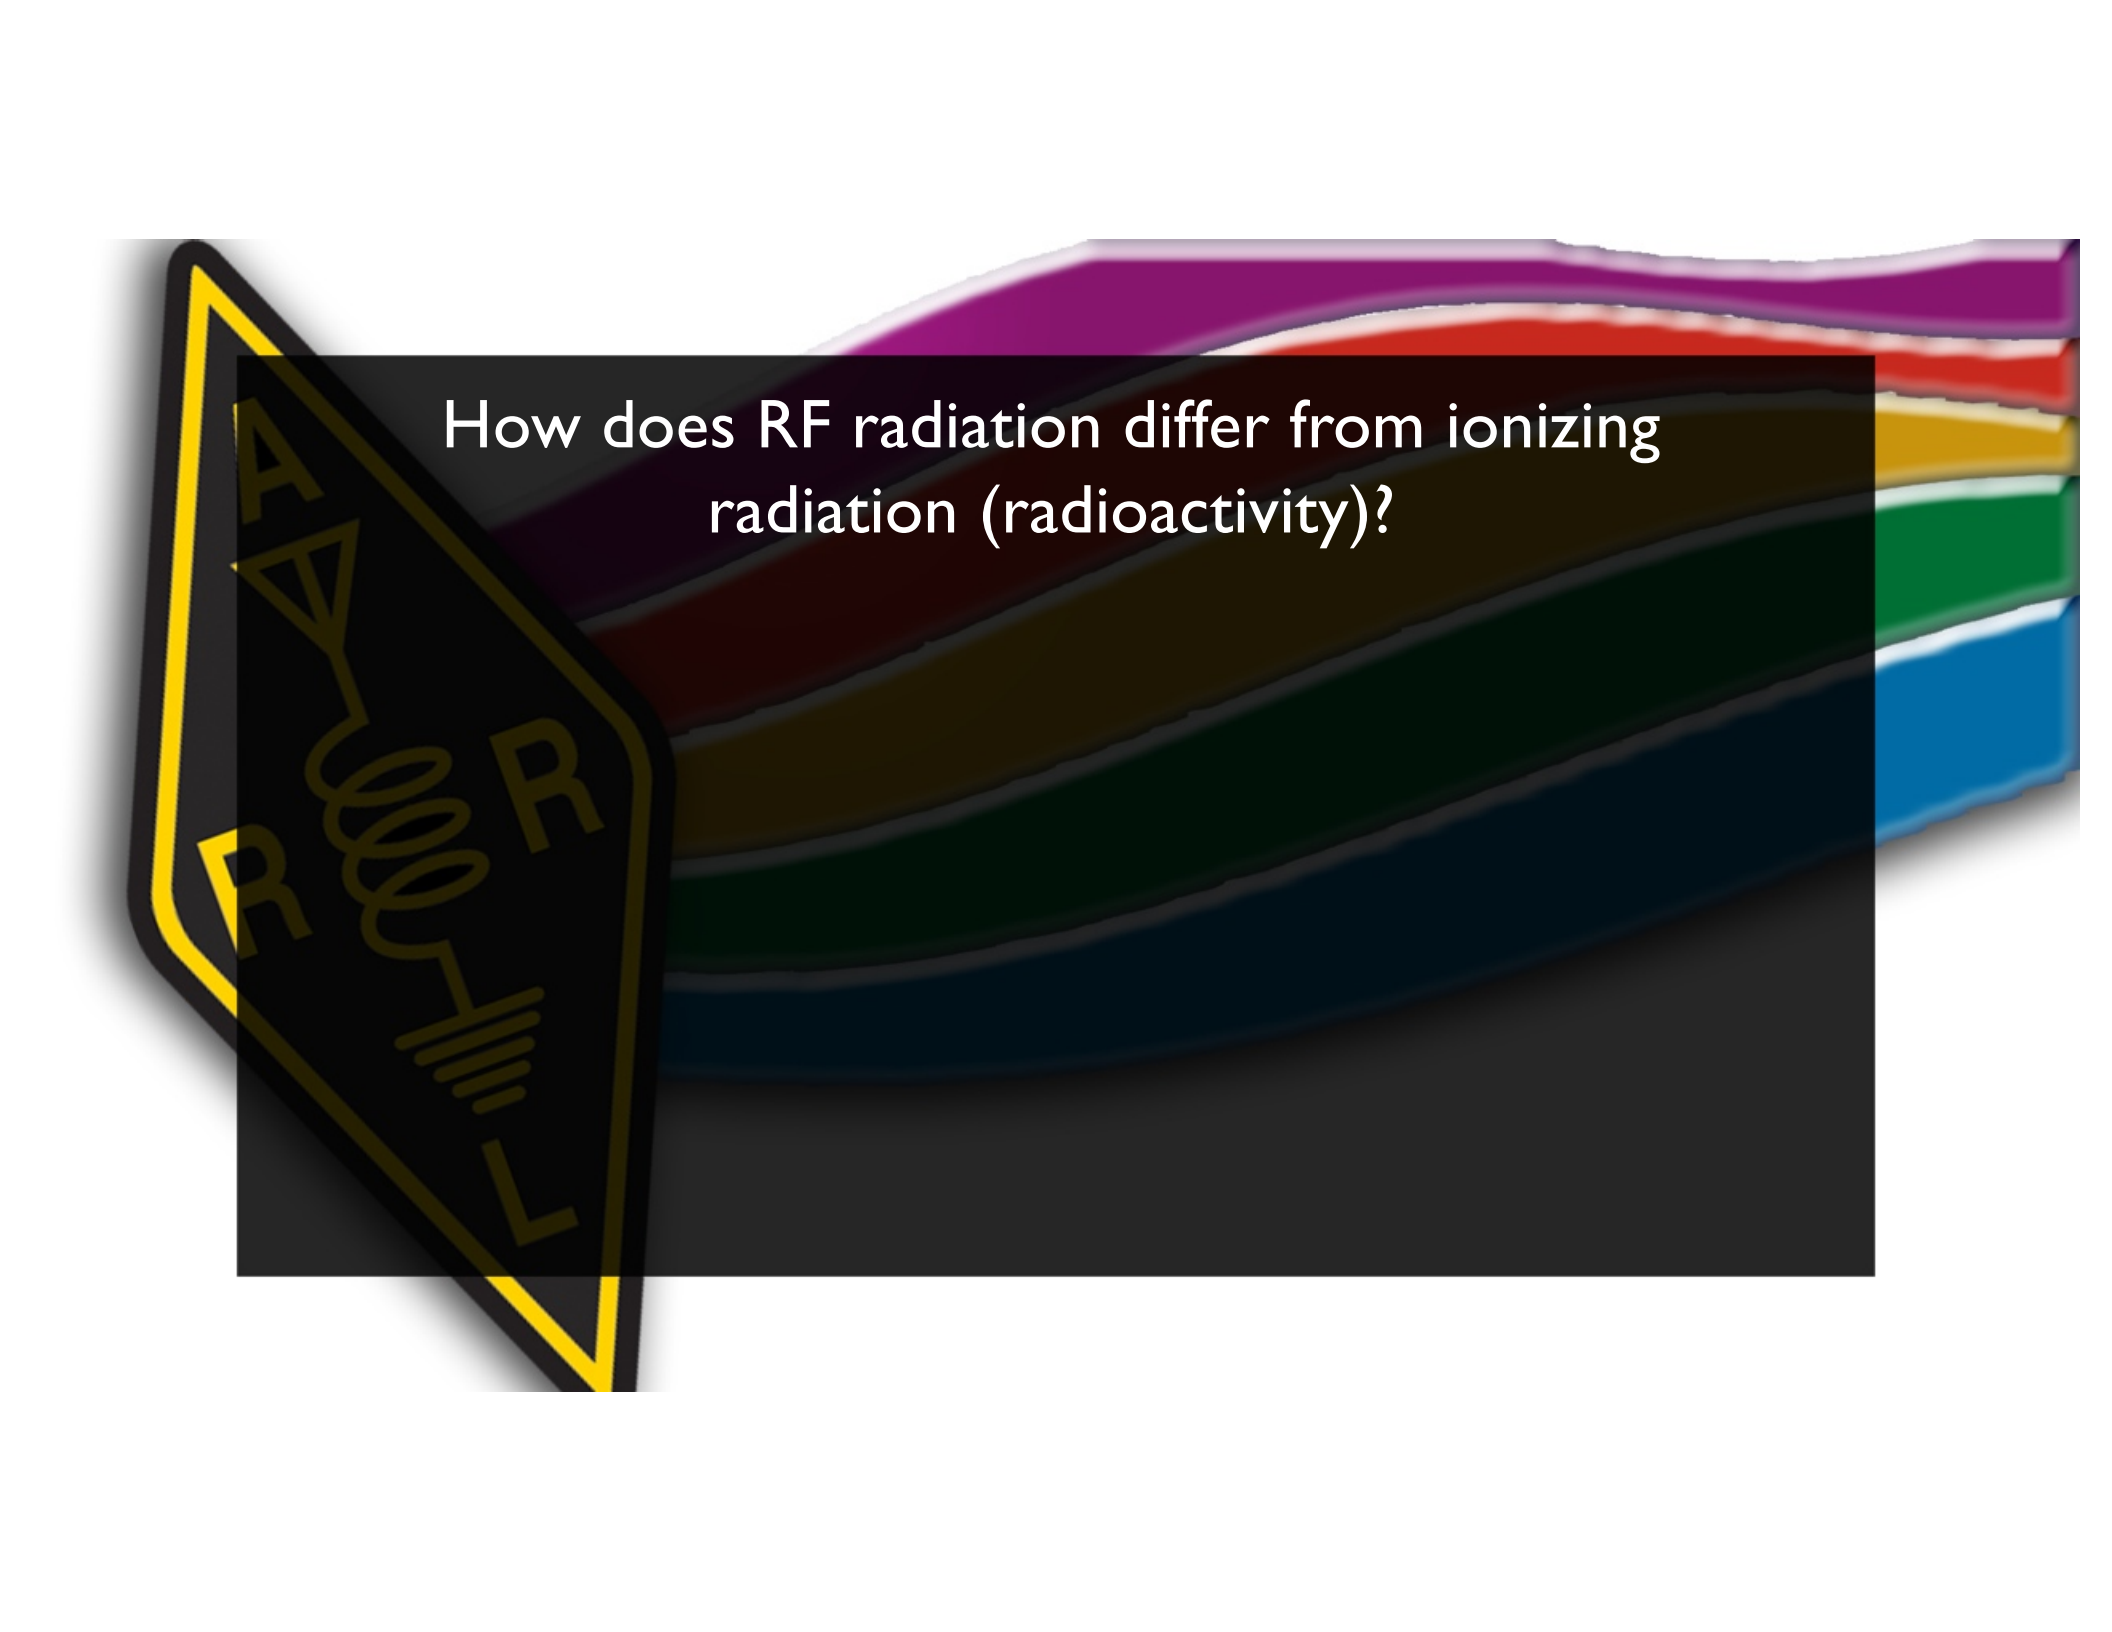


How does RF radiation differ from ionizing radiation (radioactivity)?

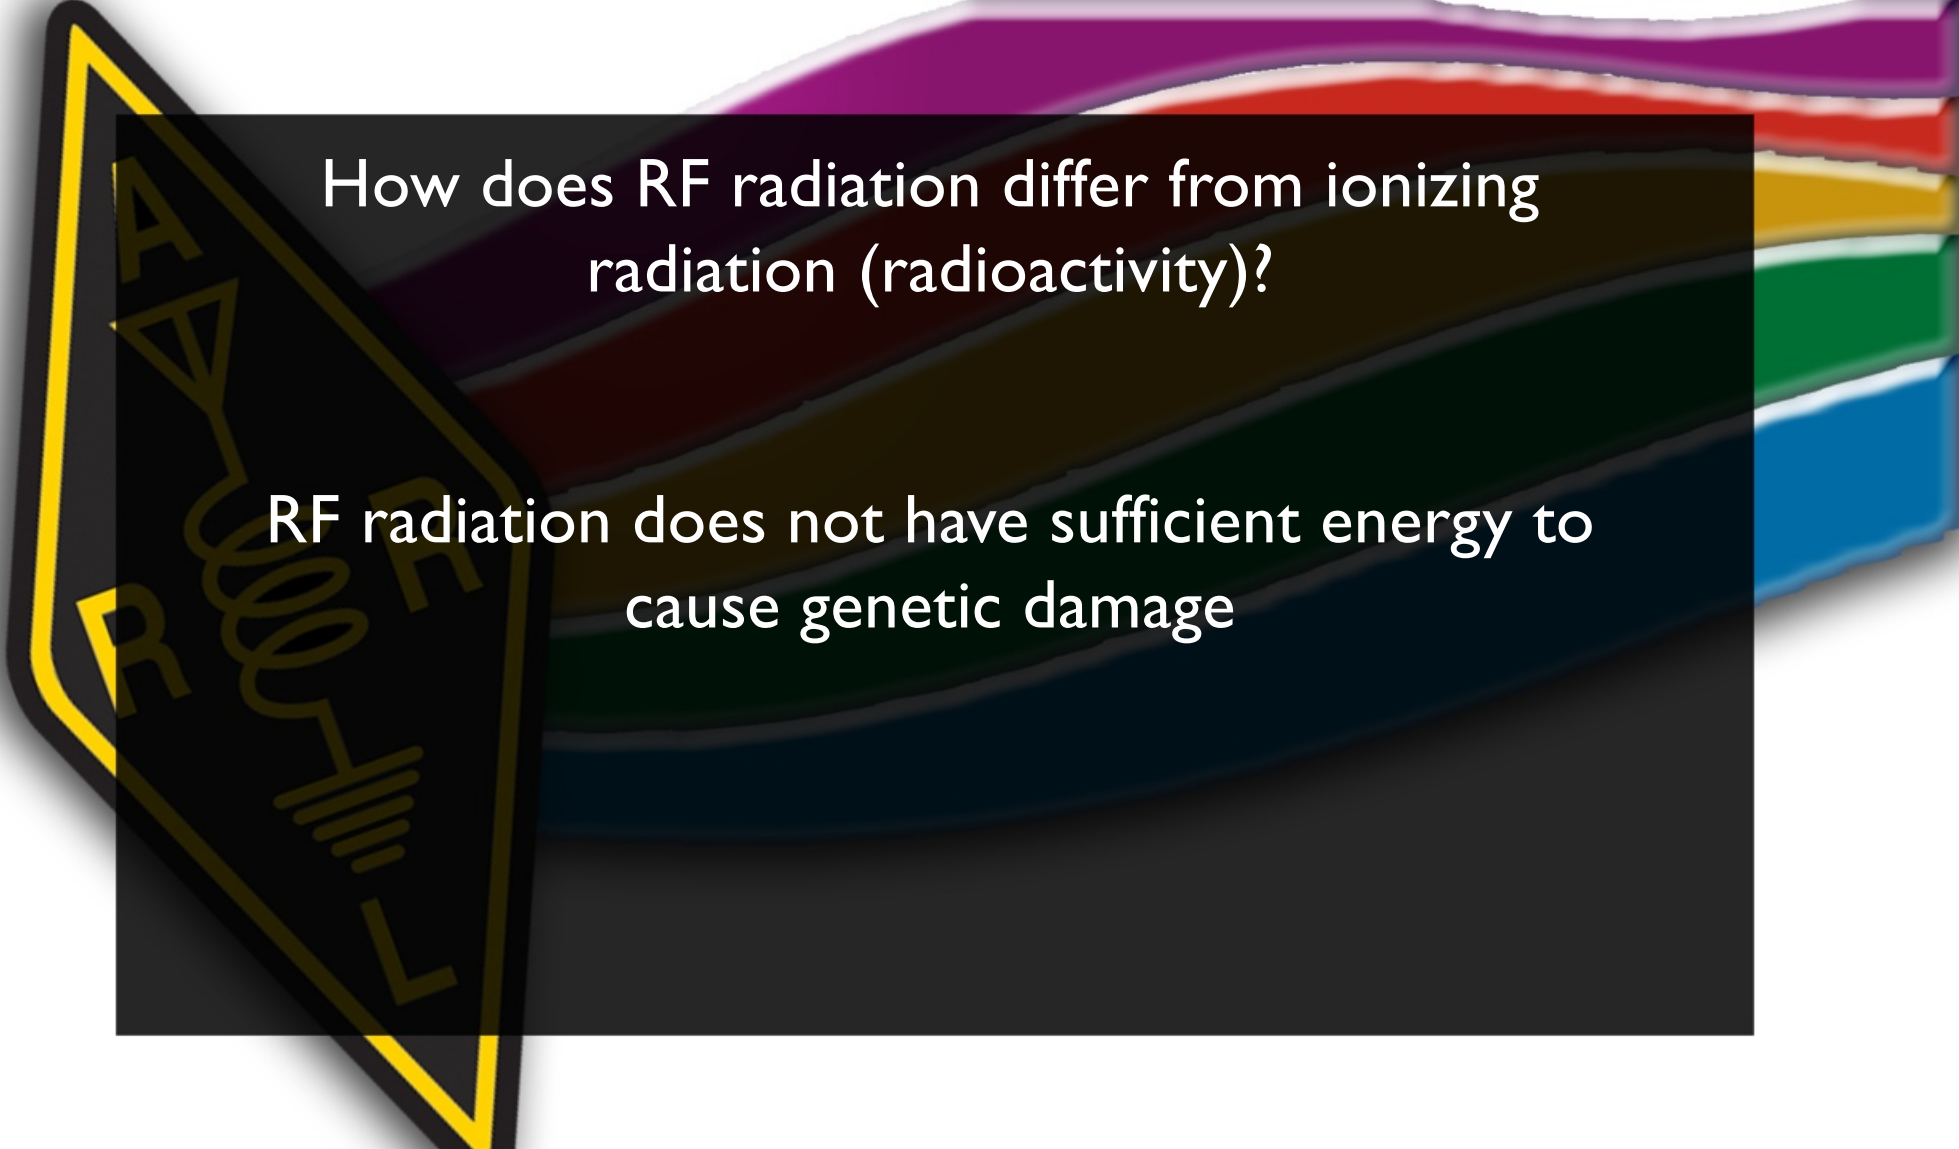


How does RF radiation differ from ionizing radiation (radioactivity)?

RF radiation does not have sufficient energy to cause genetic damage

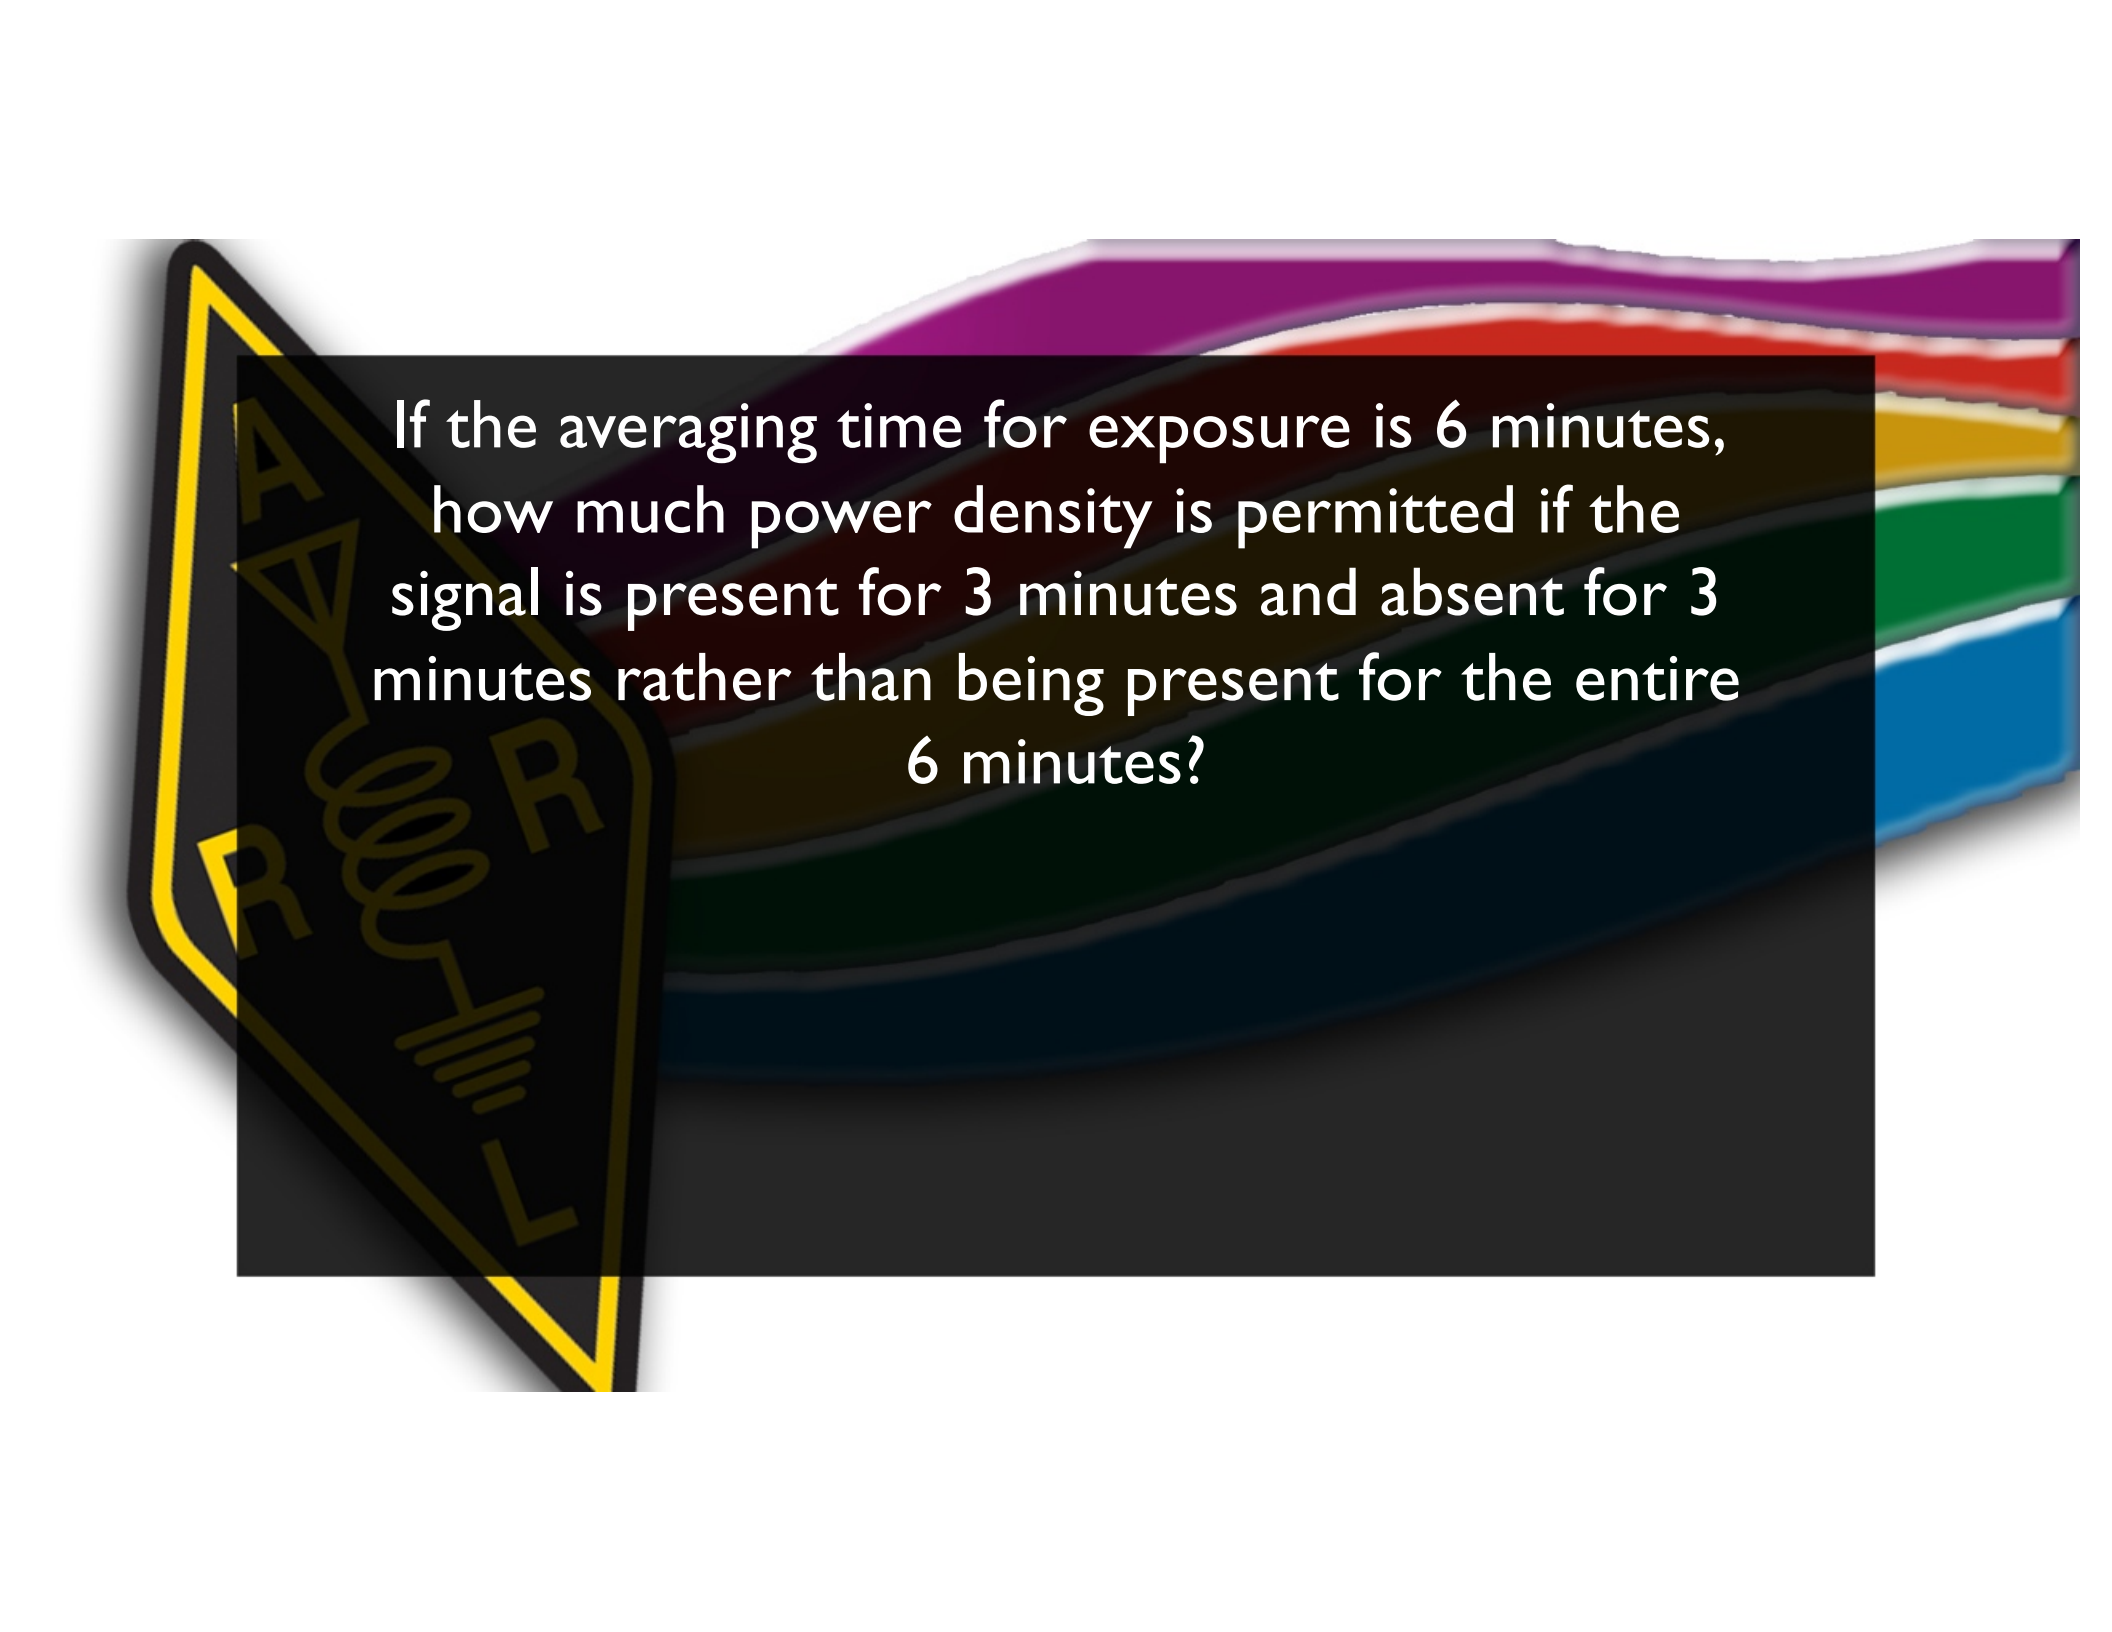


If the averaging time for exposure is 6 minutes, how much power density is permitted if the signal is present for 3 minutes and absent for 3 minutes rather than being present for the entire 6 minutes?

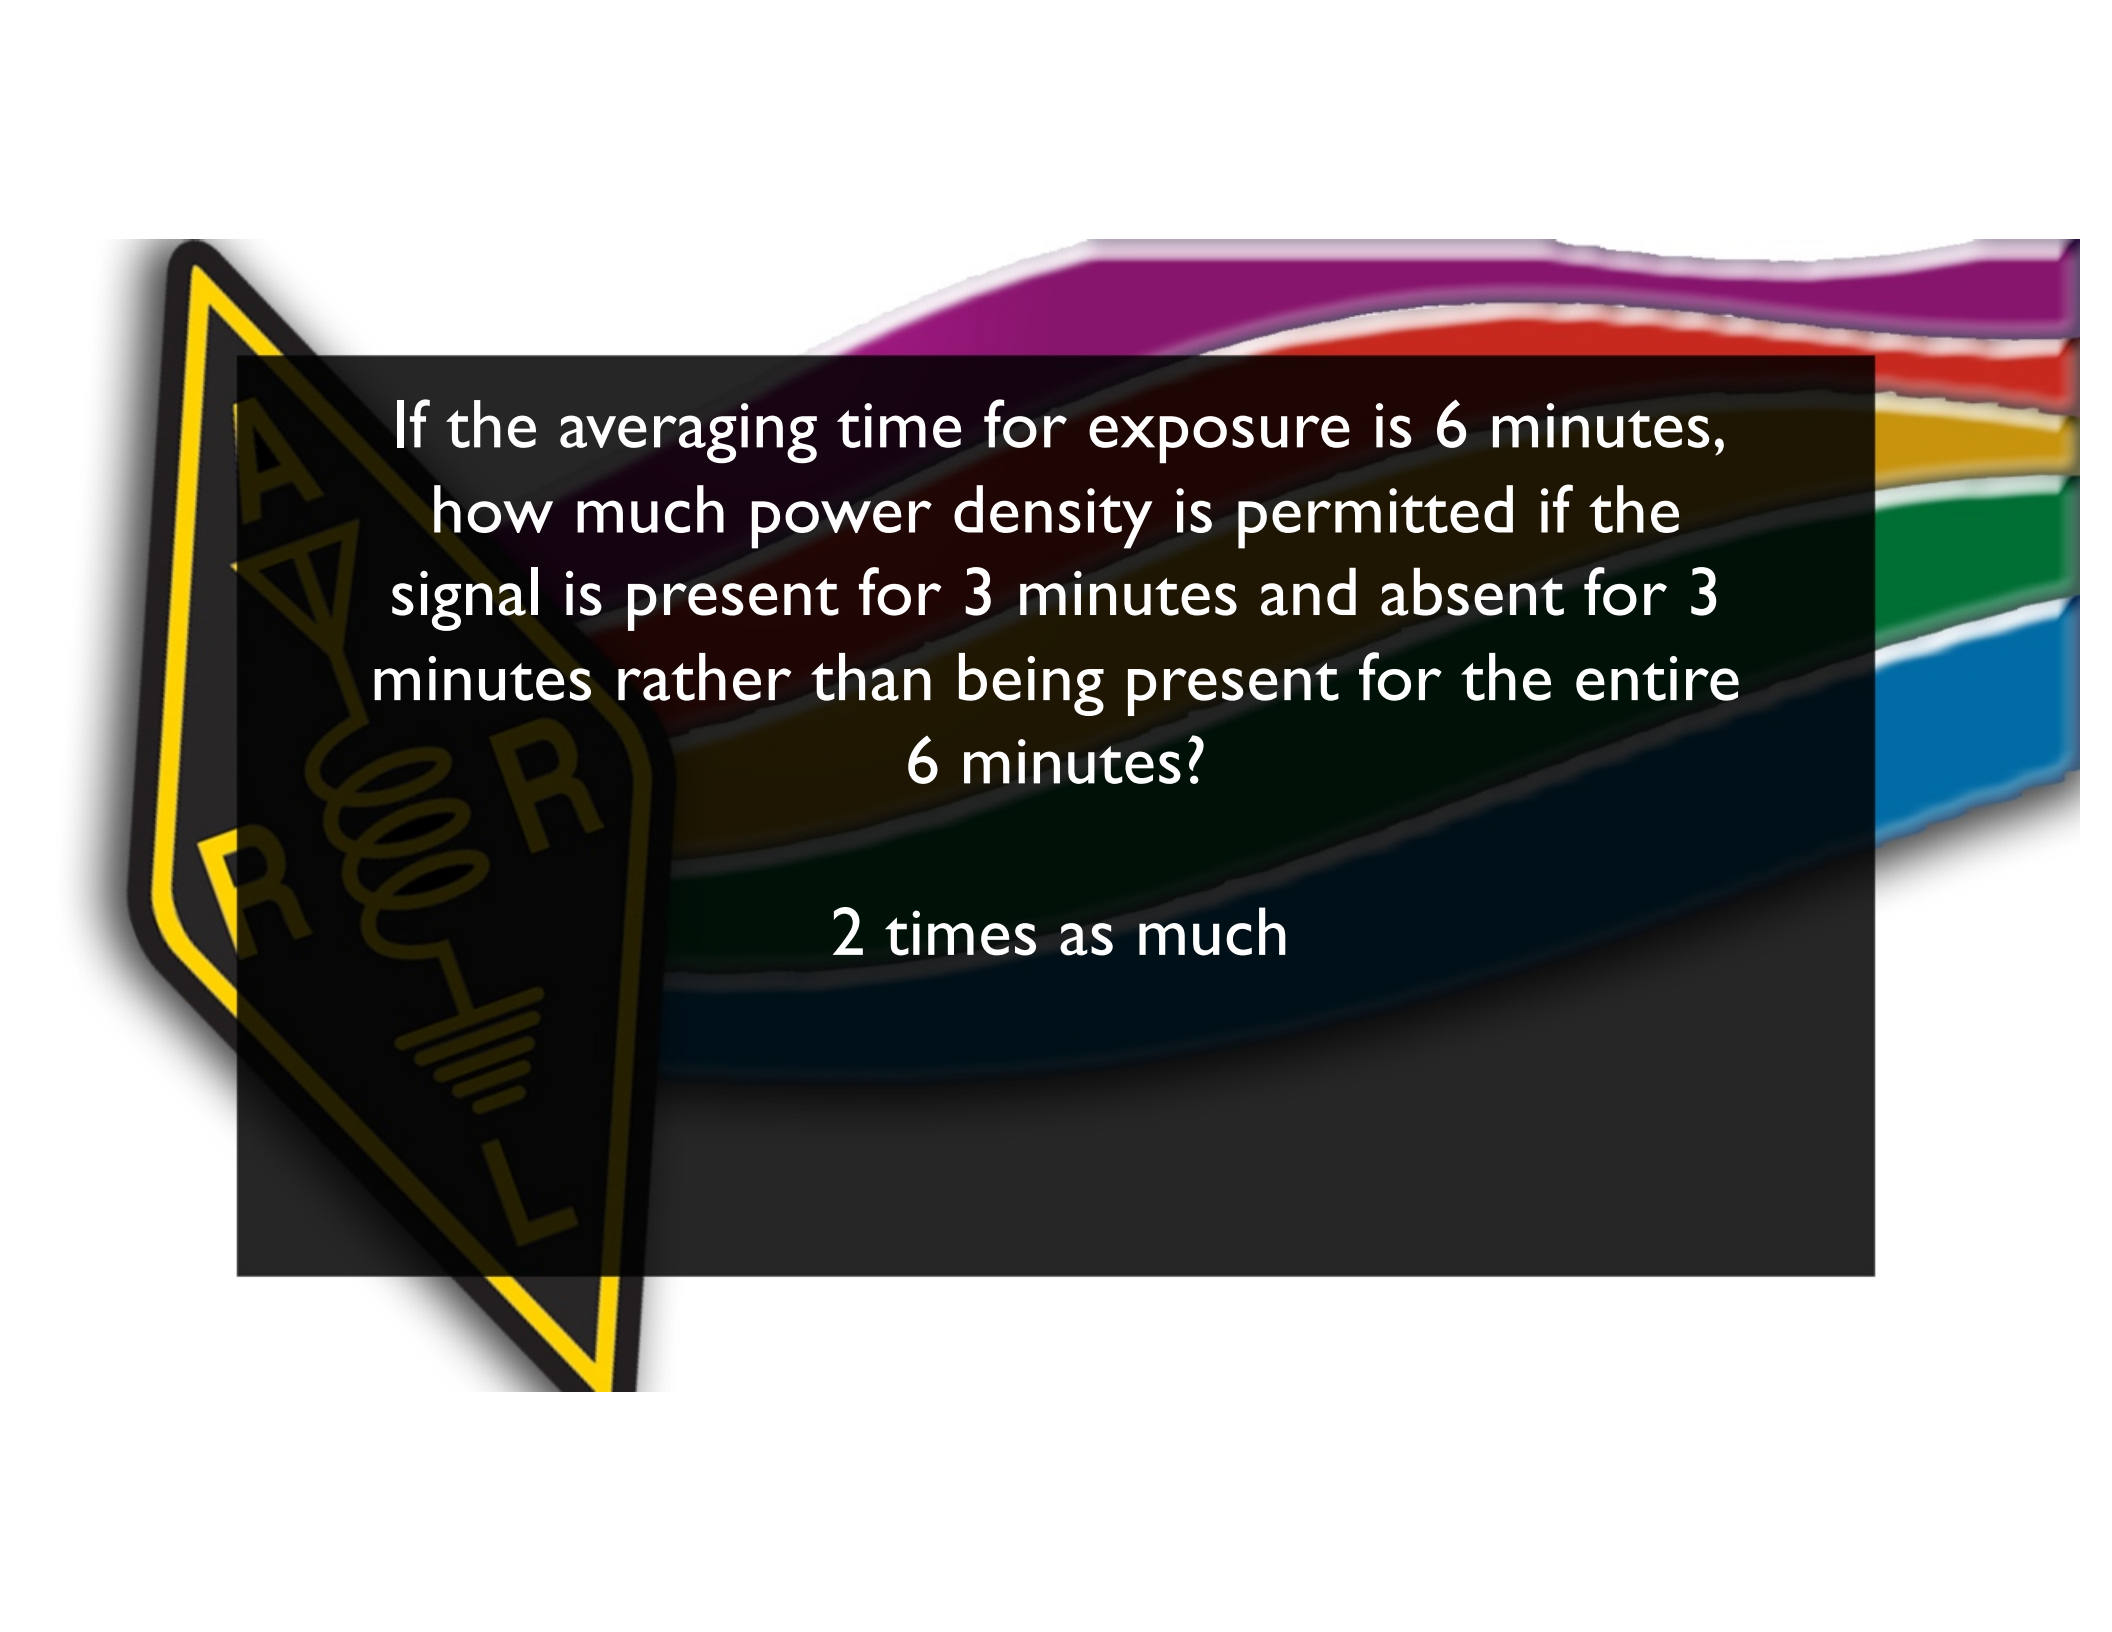

If the averaging time for exposure is 6 minutes, how much power density is permitted if the signal is present for 3 minutes and absent for 3 minutes rather than being present for the entire 6 minutes?

2 times as much

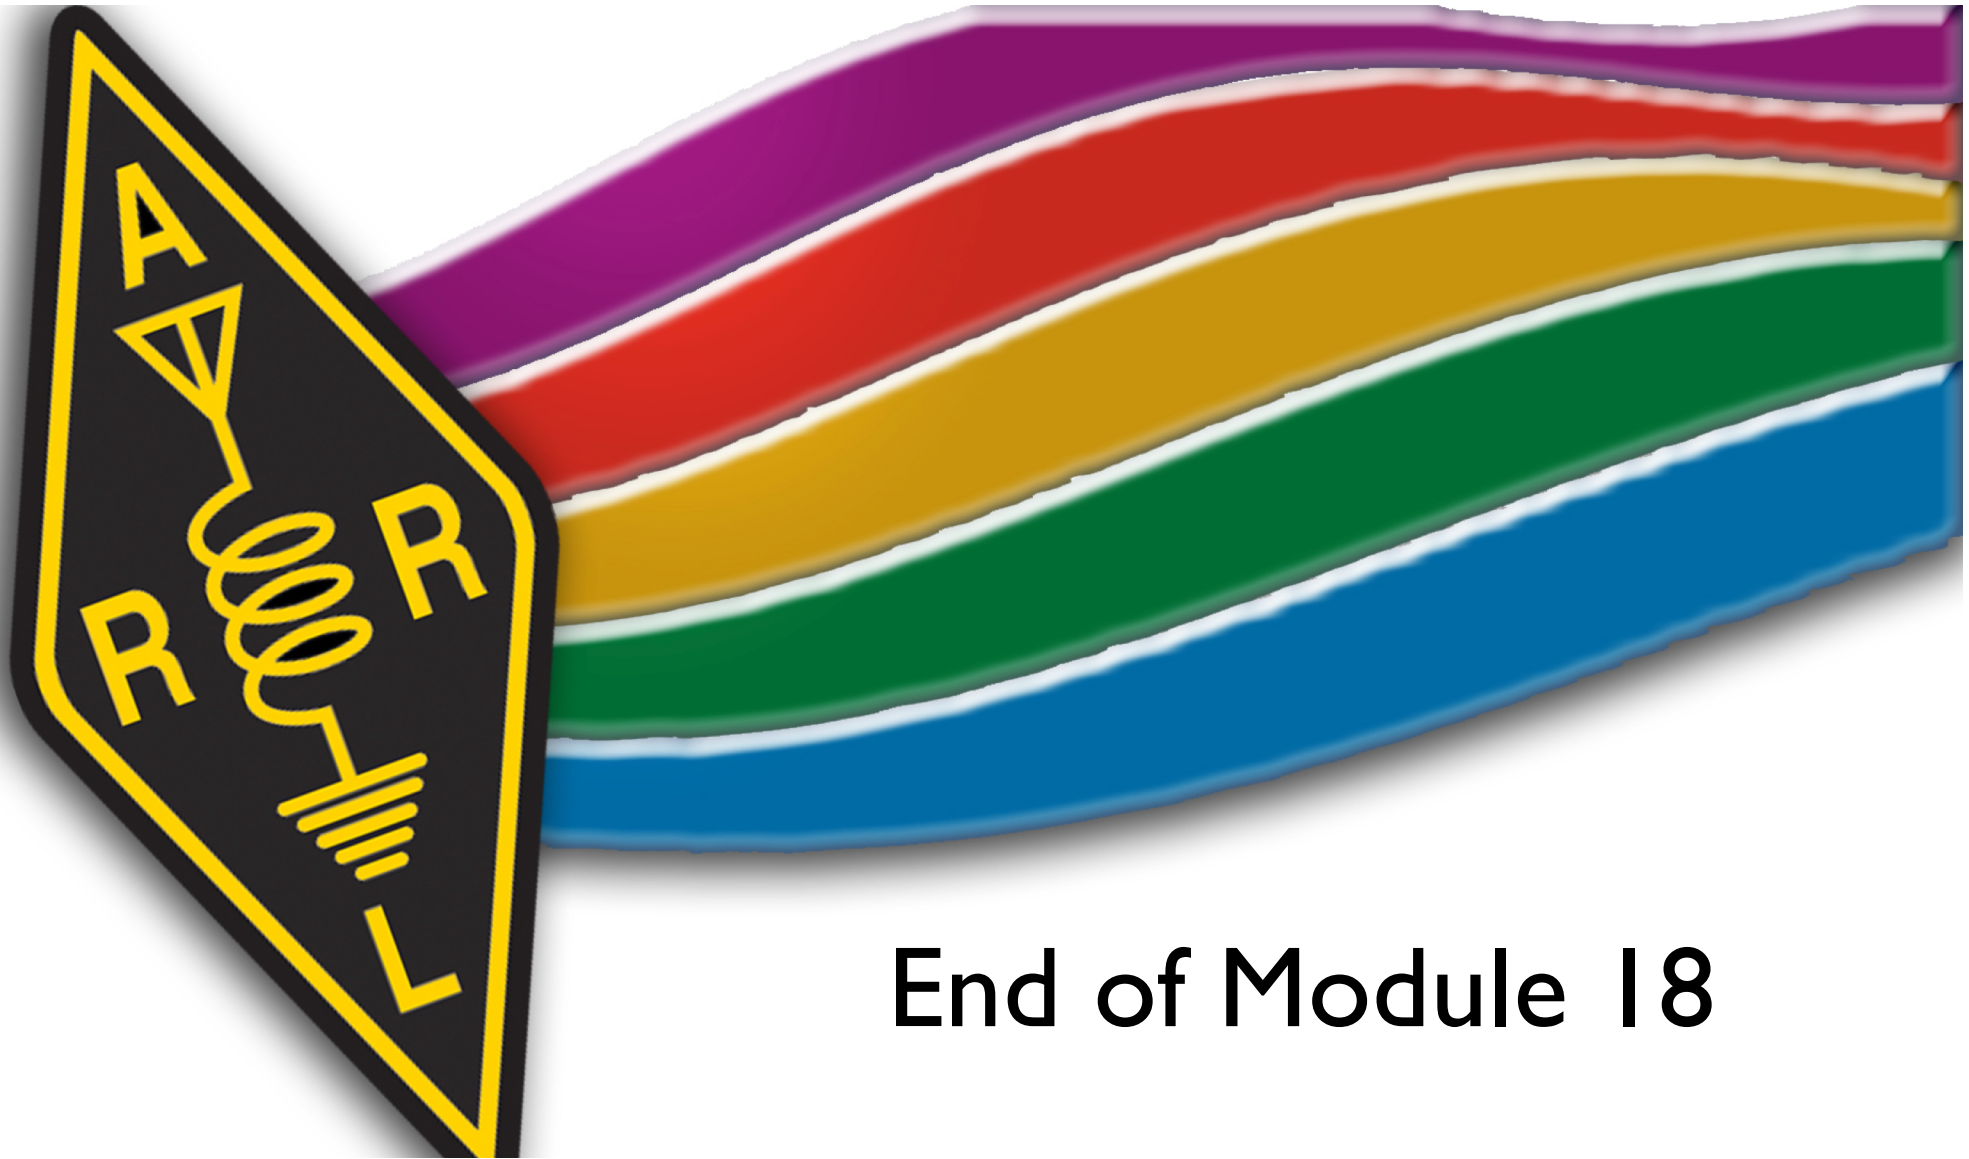

End of Module 18